

NK.LA - 3/4" DRIVE METRIC LONG-REACH METRIC 6-POINT IMPACT SOCKETS




Standards :

NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33

Description :

- For your safety, use impact sockets and accessories with the appropriate rings and pins.

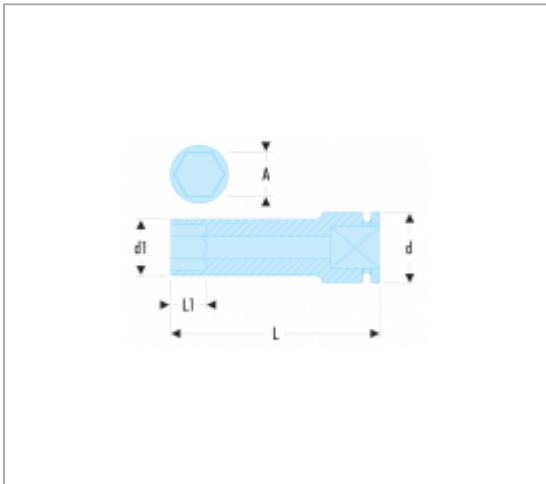

References :

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	DIMENSION [MM]	GA	[G]
NK.17LA	17	44	31	17	90	20	6	BA.30B		GA.31B	550
NK.19LA	19	44	33	17	90	24	6	BA.30B		GA.31B	620
NK.21LA	21	44	35	24	90	24	6	BA.30B		GA.31B	600
NK.22LA	22	44	37	24	90	24	6	BA.30B		GA.31B	780
NK.23LA	23	44	38	24	90	24	6	BA.30B		GA.31B	780
NK.24LA	24	44	39	24	90	40	6	BA.30B		GA.31B	820
NK.26LA	26	44	41	24	90	40	6	BA.30B		GA.31B	800

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	DIMENSION [MM]	GA	[G]
NK.27LA	27	44	43	24	90	40	6	BA.30B		GA.31B	810
NK.29LA	29	44	45	24	90	40	6	BA.30B		GA.31B	890
NK.30LA	30	44	47	24	90	40	6	BA.30B		GA.31B	900
NK.32LA	32	44	48	24	90	45	6	BA.30B	204 x 122 x 52	GA.31B	930
NK.33LA	33	44	48	24	90	45	6	BA.30B	332 x 143 x 67	GA.31B	980
NK.34LA	34	44	48	24	90	45	6	BA.30B	389 x 164 x 66	GA.31B	1100
NK.35LA	35	44	50	24	90	45	6	BA.30B	478 x 234 x 72	GA.31B	1240
NK.36LA	36	44	52	25	90	45	6	BA.30B		GA.31B	1240
NK.38LA	38	44	56	60	90	45	6	BA.30B		GA.31B	1220
NK.41LA	41	44	58	60	90	48	6	BA.30B		GA.31B	1470
NK.42LA	42	44	62	60	90	48	6	BA.30B		GA.31B	1450
NK.46LA	46	44	65	60	100	48	6	BA.30B		GA.31B	1500