


i CIRCLIP PLIERS FOR INTERNAL RETAINING RINGS

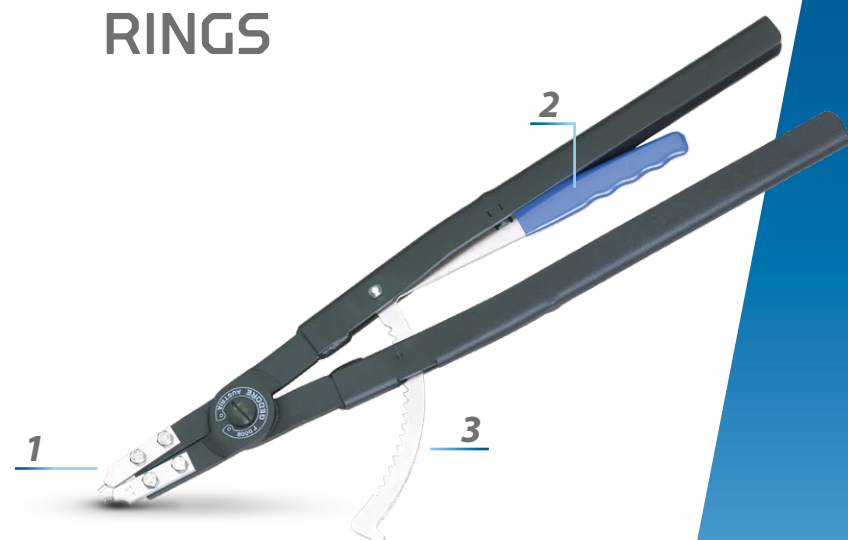

1

3.2/3.5/4.5 mm tip diameters available for 85 to 400 mm rings. Models for internal and external retaining rings

2

Release lever for controlled slackening of the tension

3


Ratcheting mechanism for easing the work of the user when fitting the retaining rings

- Straight tips
- Black, tips and lock lever zinc-plated
- The toothed bracket stops the pliers legs from straddling beyond the permitted working area
- This ensures safe working even in hidden fitting positions

- Locking pin can be replaced
- Non-crush type release-lever with handle recesses, blue dip-insulated
- Precision machined, oil hardened and annealed
- E-8000 J = pair of spare tips

8000 J 4 - J 6

Circlip pliers for internal retaining rings




- > Straight tips
- > Black, tips and lock lever zinc-plated
- > The toothed bracket stops the pliers legs from straddling beyond the permitted working area
- > This ensures safe working even in hidden fitting positions
- > Locking pin can be replaced
- > Non-crush type release-lever with handle recesses, blue dip-insulated
- > Precision machined, oil hardened and annealed
- > Pair of replacement tips available

Code	No.	mm	inch	d	mm	kg
2011794	8000 J 4 EL	85-140	3.3/8-5.1/2	3,2	590	1,835
6703750	8000 J 5	122-300	4.13/16-11.7/8	3,5	565	1,836
6703830	8000 J 6	252-400	9.15/16-15.13/16	4,5	575	1,846

E-8000 J 4 - J 6

Spare tips straight (pair)



Code	No.	d	kg
2011700	E-8000 J 4 EL	3,2	0,072
5703700	E-8000 J 5	3,5	0,072
5703890	E-8000 J 6	4,5	0,082