

The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720


Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number AH24128, Metric AH Withdrawal Sleeve


- Sleeves used in the dismounting of tapered bore bearing from shaft.
- Safe and effective dismounting.
- Other dimensions may be available, consult your Timken sales representative.





Specifications -		
	d1	135.00 mm
	L	99.00 mm
	L ₁ ¹	109.00 mm
	b	14 mm
	Thread D_1^2	M150x2
	Weight	1.25 Kg
	Appropriate Withdrawal Nut No.	KM30
	Appropriate Hydraulic Nut	HMV30
	Taper	1:30

- $^{1}\,\mathrm{Dimension}\,\mathrm{L1}\,\mathrm{decreases}$ as the withdrawal sleeve is driven in during mounting.
- 2 Means metric thread and the digits are major diameter of thread and pitch. Trmeans 30°; trapezoid thread and the digits are major diameter of thread and pitch.

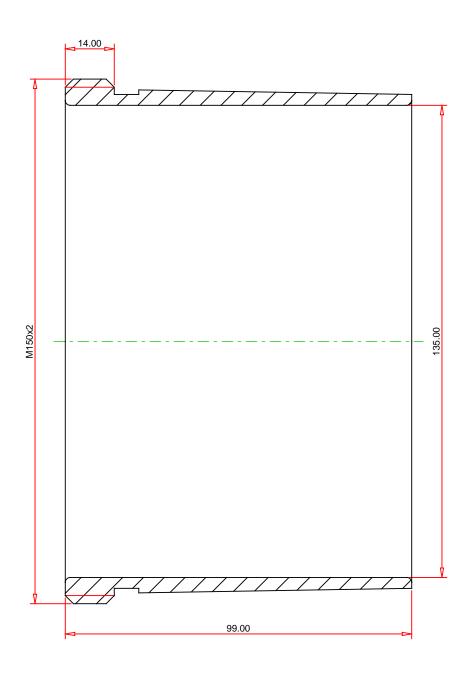

METRIC UNITS



AH24128 Metric AH Withdrawal Sleeve

THE TIMKEN COMPANY NORTH CANTON, OHIO USA

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY