



Technical data

UCFCE211


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC211G2, FCE211

VISUAL (S)

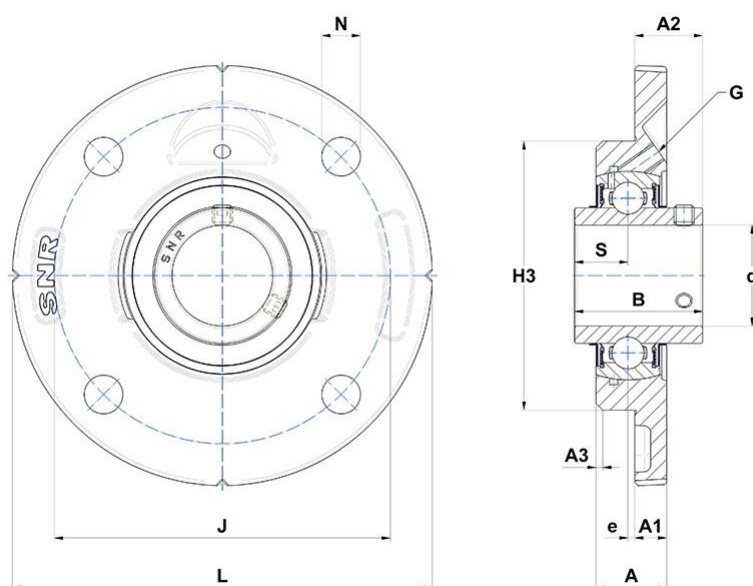

PRODUCT DEFINITION

A - Housing height	27,5 mm
A1 - Housing foot height / flange height	15 mm
A2 - Total height from mounting surface	33,4 mm
A3 - Centering depth / chamfer dimension	3 mm
B - Width of Inner Ring	55,6 mm
d - Shaft diameter	55 mm

PRODUCT DEFINITION

G - Grease fitting	M6x1
H3 - Centering dia	125 mm
J - Mounting holes distance	150 mm
L - Housing width / diameter	185 mm
N - Mounting hole dimension	18 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	22,2 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	43,55 kN
C0 - Static load rating	29,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	3,13 kg
Recommended tightening torque for set screw	22 N-m