


# Pre-filter, Series NL2-FLP

- G 1/4
- filter porosity 0,3 µm
- suitable for ATEX

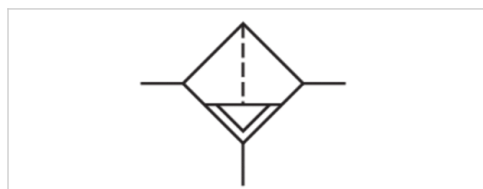

Type	Pre-filter, Can be assembled into blocks
Parts	Pre-filter
Mounting orientation	vertical
Certificates	suitable for ATEX
Working pressure min./max.	2 ... 16 bar
Ambient temperature min./max.	-10 ... 60 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air Neutral gases
Filter reservoir volume	10 cm <sup>3</sup>
Filter element	exchangeable
filter porosity	0,3 µm
Condensate drain	See table below
Weight	See table below

## Technical data

Part No.	Port	Flow Qn	Condensate drain	Weight
0821303308	G 1/4	380 l/min	semi-automatic, open without pressure	0,45 kg
0821303309	G 1/4	380 l/min	fully automatic, open without pressure	0,45 kg
R412010785	G 1/4	380 l/min	fully automatic, open without pressure	0,48 kg

Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 0.1 bar, Suitable for use in Ex zones 1, 2, 21, 22.

## Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Suitable for use in Ex zones 1, 2, 21, 22.

A change in the flow direction (from air supply on the left to air supply on the right) occurs by rotating installation by 180° about the vertical axis. Please see the operating instructions for further details.

Note: Polycarbonate reservoirs are susceptible to solvents, supplementary information can be found at "Customer information".

Recommended pre-filtering 5 µm

Max. achievable compressed air class acc. to ISO 8573-1:2010 2 : - : 3


## Technical information

Material	
Housing	Die cast zinc
Front plate	Acrylonitrile butadiene styrene

Material	
Seals	Acrylonitrile butadiene rubber
Reservoir	Polycarbonate Die cast zinc
Filter insert	Impregnated paper

## Dimensions

### Dimensions

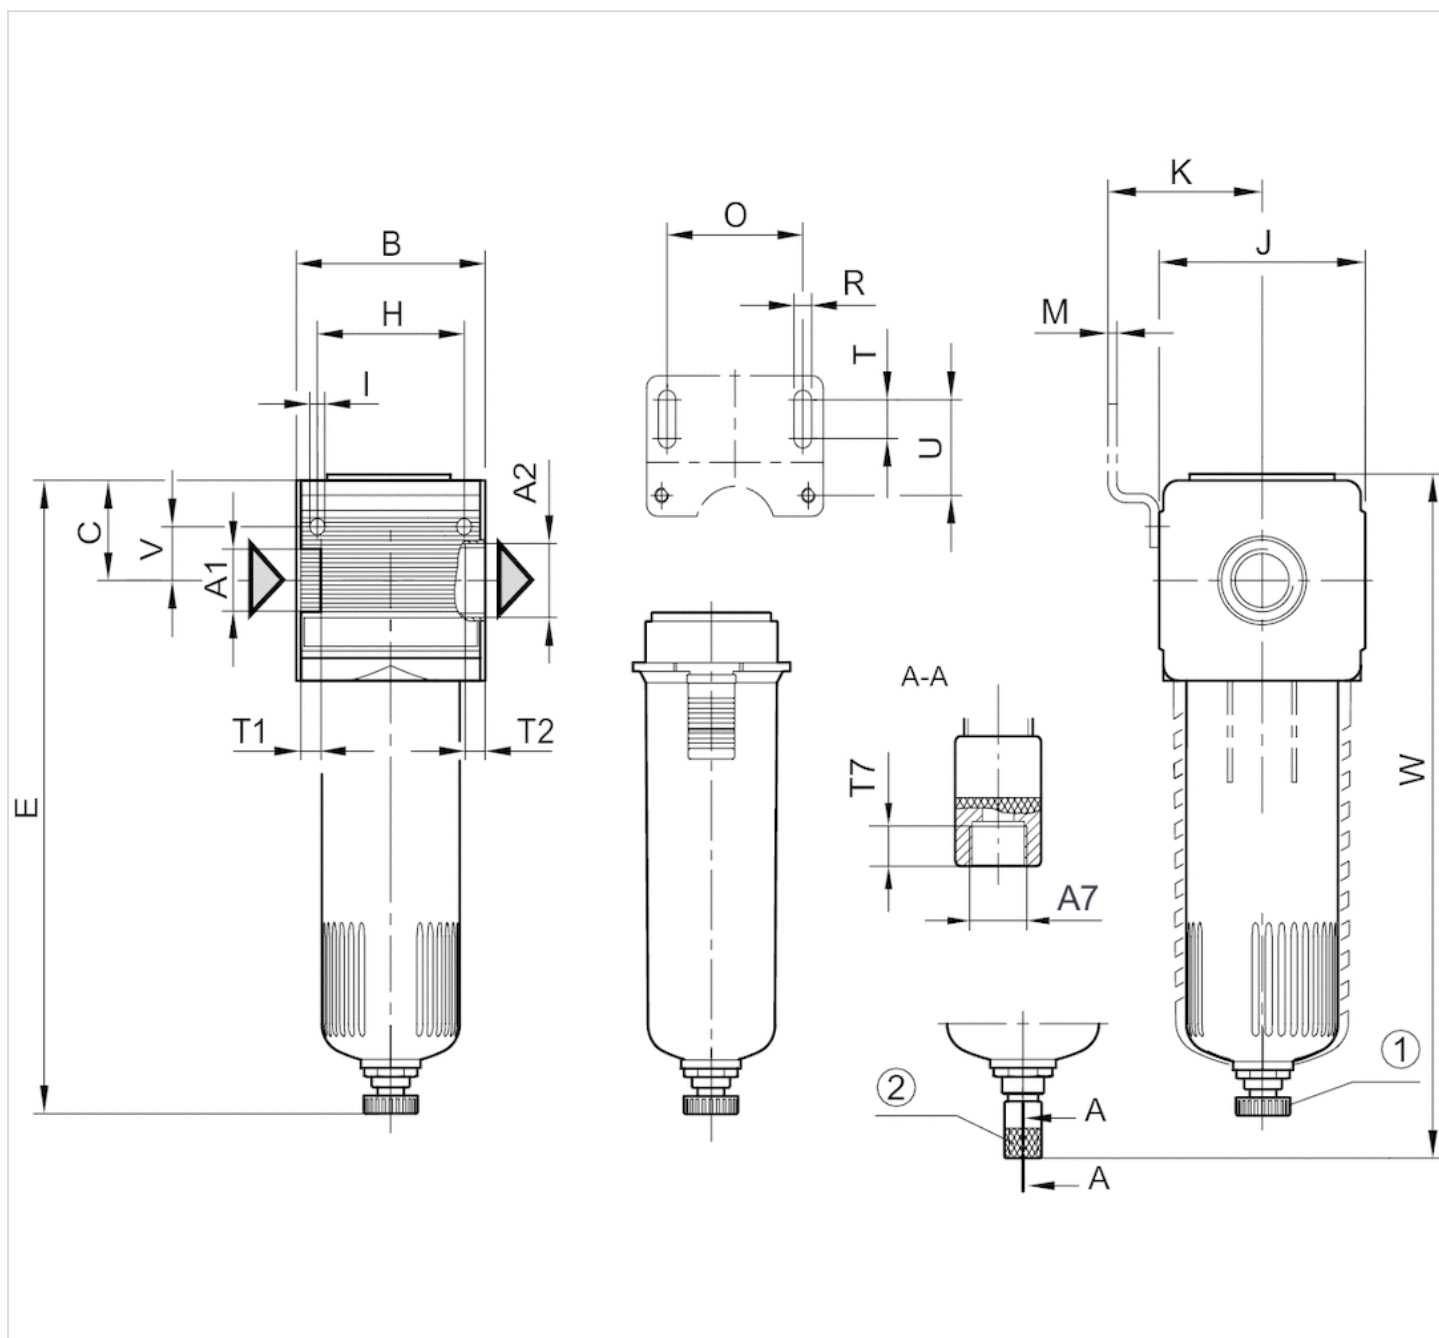

A1 = input

A2 = output

A7 = condensate drain

1) Semi-automatic condensate drain


2) fully automatic condensate drain

## Dimensions in mm

A1	A2	A7	B	C	E	H	I	J	K	M	O	R	T	T1	T2	T7	U	V	W
G 1/4	G 1/4	G 1/8	48	27.5	152	36	4.4	47	43.5	3	38	5.4	8	9.5	9.5	8.5	27.5	12.3	—
G 1/4	G 1/4	G 1/8	48	27.5	—	36	4.4	47	43.5	3	38	5.4	8	9.5	9.5	8.5	27.5	12.3	168

## Diagrams

## Flow rate characteristic

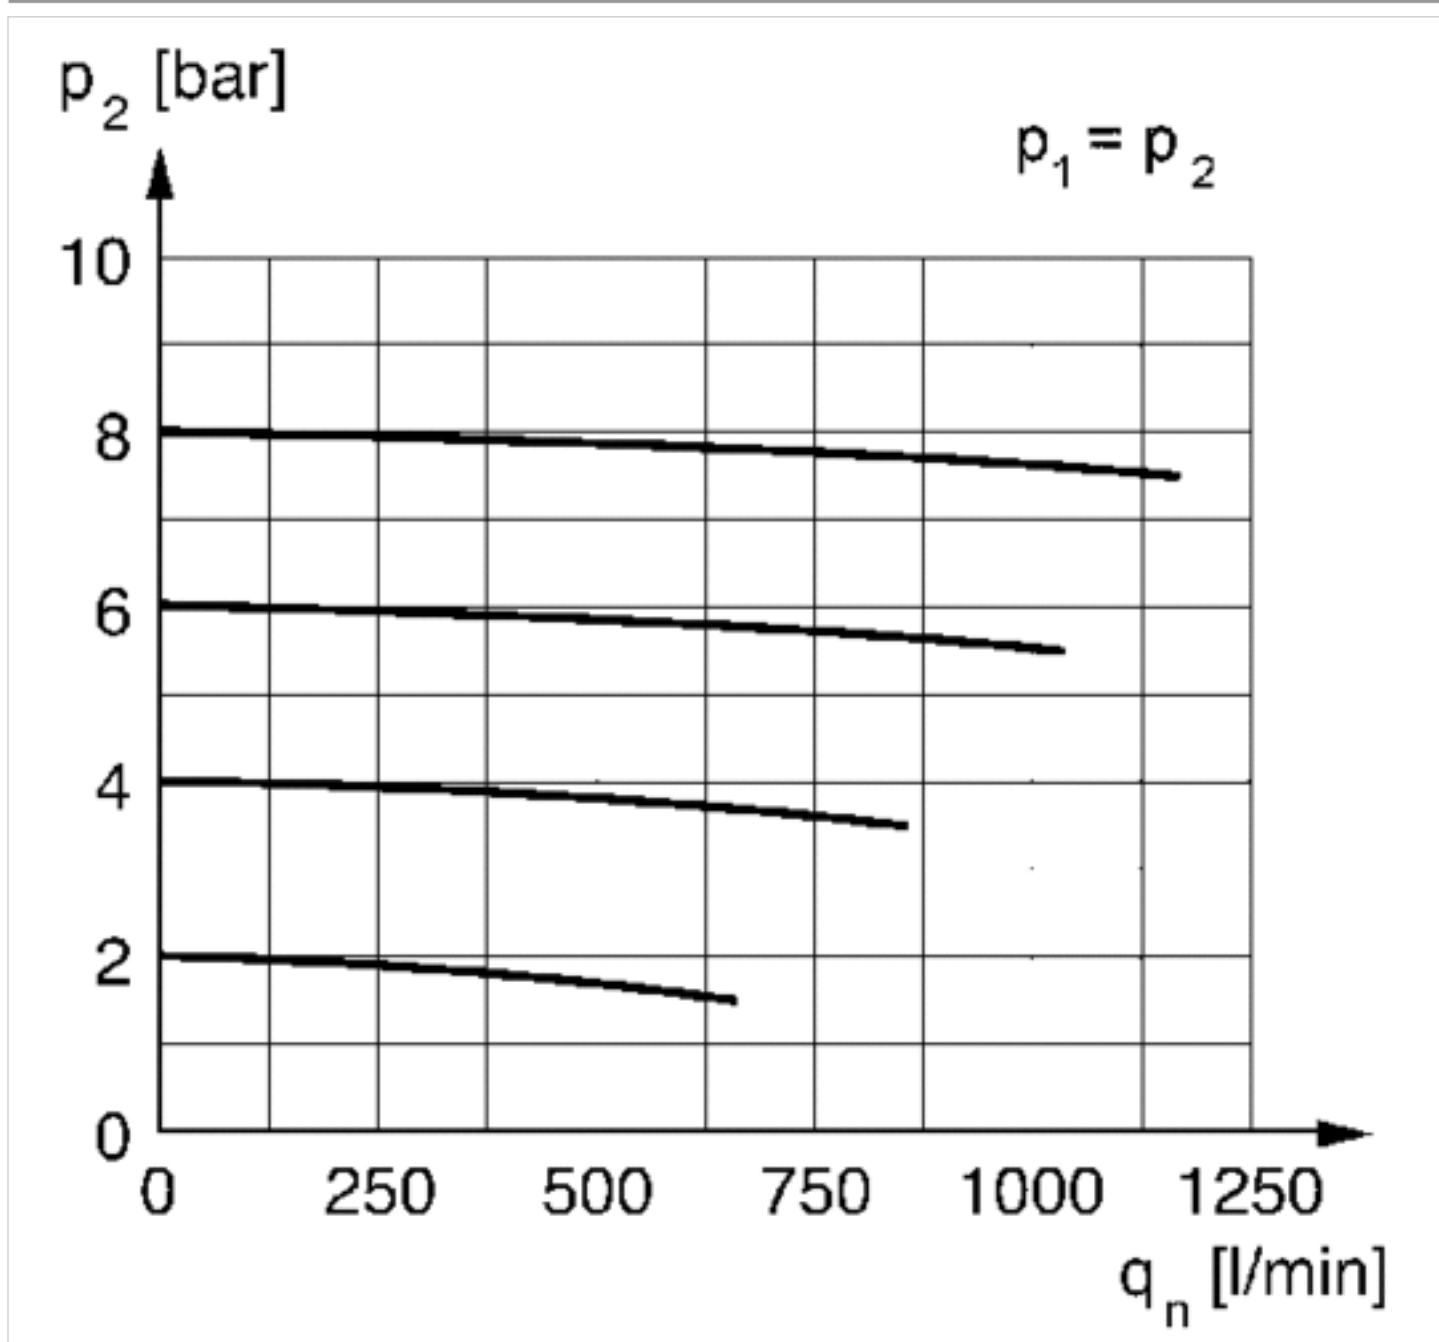

$p_2$  = secondary pressure  
 $q_n$  = nominal flow

# Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR\_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.  
2020-12



## CONSIDER IT SOLVED™