


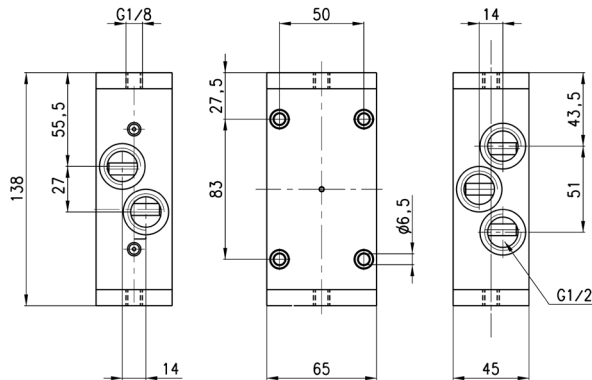


5/2-way valve, G1/2 port, bistable Mod. 452C



Mod.	Mounting	Function	Flow rate Qn (NL/min)	min. pilot Pressure (bar)	Working pressure (bar)	Symbol
452C-33	in-line	5/2	2500	2	-0.9 ÷ 10	VP06
452C-34	in-line	5/2	2500	2	-0.9 ÷ 10	VP05

5/2-way valve, G1/2 port, monostable Mod. 452N-35

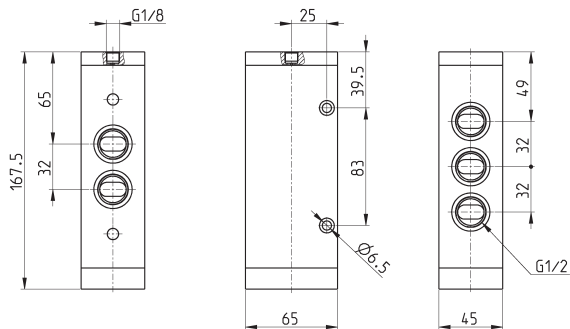

Mod.	Mounting	Function	Flow rate Qn (NL/min)	Min. pilot pressure (bar)	Working pressure (bar)
452N-35	in-line	5/2	4000	2.5	-0.9 ÷ 10