











Reduce Your Costs in Engineering and Purchasing




Base Mounted Valve/For Manifold Mounting



# 3D View

To activate the interactive 3D view, you must trust this document (see hint on the top) in Adobe Acrobat and click on the question mark.

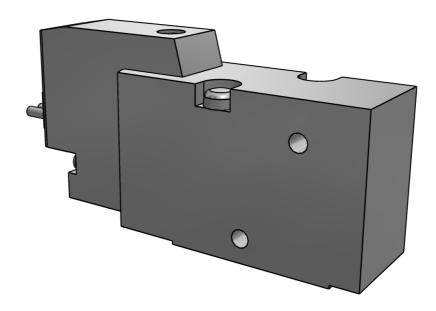



# Zoom

Moves you toward or away from objects in the scene when you drag vertically. You can also zoom with the hand tool by holding down Shift as you drag.



Moves the model vertically and horizontally only. You can also pan with the hand tool: Ctrl-drag.



### Rotate

Turns 3D objects around relative to the screen. How the objects move depends on the starting view, where you start dragging and the direction in which you drag.











Create Your Individual 3D PDF Datasheet

Learn How to Create Your Mechanical Product Catalog

Learn How to Create Your BIM Product Catalog


Reduce Your Costs in Engineering and Purchasing




Base Mounted Valve/For Manifold Mounting



2D derivation **ISO View** 

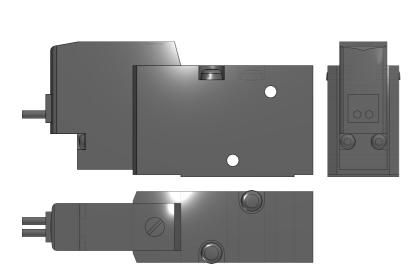

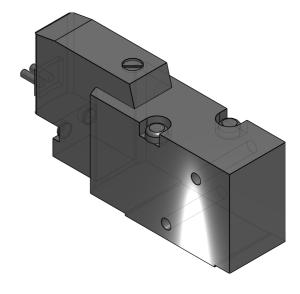

# 3D PDF DATASHEET









Create Your Individual 3D PDF Datasheet





Reduce Your Costs in Engineering and Purchasing



Base Mounted Valve/For Manifold Mounting



# **Technical Data**

ACTUATION (Type of actuation)  OPTION (Body option)  (M) Common exhaust for the pilot and main valve  COIL (Coil specifications)  VOLTAGE (Rated voltage)  ENTRY1 (Electrical entry)  SUPPRESSOR (Light/Surge voltage suppressor)  MANUAL (Manual override)  CE (CE compliant)  (1) Normally closed  (M) Common exhaust for the pilot and main valve  (-) Standard  (5) 24 VDC  (G) Grommet, Lead wire length 300 mm  (-) Without light/surge voltage suppressor  (D) Push-turn locking slotted type  (Q) CE-compliant		
COIL (Coil specifications)  VOLTAGE (Rated voltage)  ENTRY1 (Electrical entry)  SUPPRESSOR (Light/Surge voltage suppressor)  MANUAL (Manual override)  (-) Standard  (5) 24 VDC  (G) Grommet, Lead wire length 300 mm  (-) Without light/surge voltage suppressor  (D) Push-turn locking slotted type	ACTUATION (Type of actuation)	(1) Normally closed
VOLTAGE (Rated voltage)  ENTRY1 (Electrical entry)  SUPPRESSOR (Light/Surge voltage suppressor)  MANUAL (Manual override)  (5) 24 VDC  (G) Grommet, Lead wire length 300 mm  (-) Without light/surge voltage suppressor  (D) Push-turn locking slotted type	OPTION (Body option)	(M) Common exhaust for the pilot and main valve
ENTRY1 (Electrical entry)  (G) Grommet, Lead wire length 300 mm  SUPPRESSOR (Light/Surge voltage suppressor)  (-) Without light/surge voltage suppressor  MANUAL (Manual override)  (D) Push-turn locking slotted type	COIL (Coil specifications)	(-) Standard
SUPPRESSOR (Light/Surge voltage suppressor)  MANUAL (Manual override)  (-) Without light/surge voltage suppressor  (D) Push-turn locking slotted type	VOLTAGE (Rated voltage)	(5) 24 VDC
MANUAL (Manual override) (D) Push-turn locking slotted type	ENTRY1 (Electrical entry)	(G) Grommet, Lead wire length 300 mm
	SUPPRESSOR (Light/Surge voltage suppressor)	(-) Without light/surge voltage suppressor
CE (CE compliant) (Q) CE-compliant	MANUAL (Manual override)	(D) Push-turn locking slotted type
	CE (CE compliant)	(Q) CE-compliant

# 3D PDF DATASHEET









Create Your Individual 3D PDF Datasheet Learn How to Create Your Mechanical Product Catalog Learn How to Create Your BIM
Product Catalog

Reduce Your Costs in Engineering and Purchasing



Base Mounted Valve/For Manifold Mounting



# **Bill of Materials**

N°	Description	Amount
1.1	SYJ514M-5GD-Q	1