



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number H913849, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

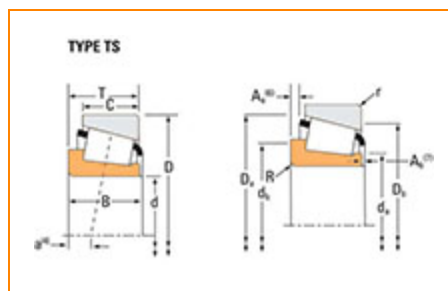

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Cone Part Number	H913849
Design Units	Imperial
Cage Type	Stamped Steel
C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)¹	107000 lbf 474000 N
C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)²	27700 lbf 123000 N

Dimensions

2.7500 in

d - Bore	2.7500 in 69.850 mm
B - Cone Width	1.5625 in 39.688 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius³	0.14 in 3.560 mm
da - Cone Frontface Backing Diameter	3.24 in 82.4 mm
db - Cone Backface Backing Diameter	3.74 in 95 mm
Ab - Cage-Cone Frontface Clearance	0.18 in 4.6 mm
Aa - Cage-Cone Backface Clearance	0.29 in 7.4 mm
a - Effective Center Location⁴	0.17 in 4.3 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁵	15900 lbf 70700 N
C1 - Dynamic Radial Rating (1 million revolutions)⁶	61300 lbf 273000 N
C0 - Static Radial Rating	57500 lbf 256000 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷	21300 lbf 94700 N

Factors

K - Factor⁸	0.75
G1 - Heat Generation Factor (Roller-Raceway)	78.5
G2 - Heat Generation Factor (Rib-Roller End)	17.3
Cg - Geometry Factor⁹	0.0927

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a_3 .

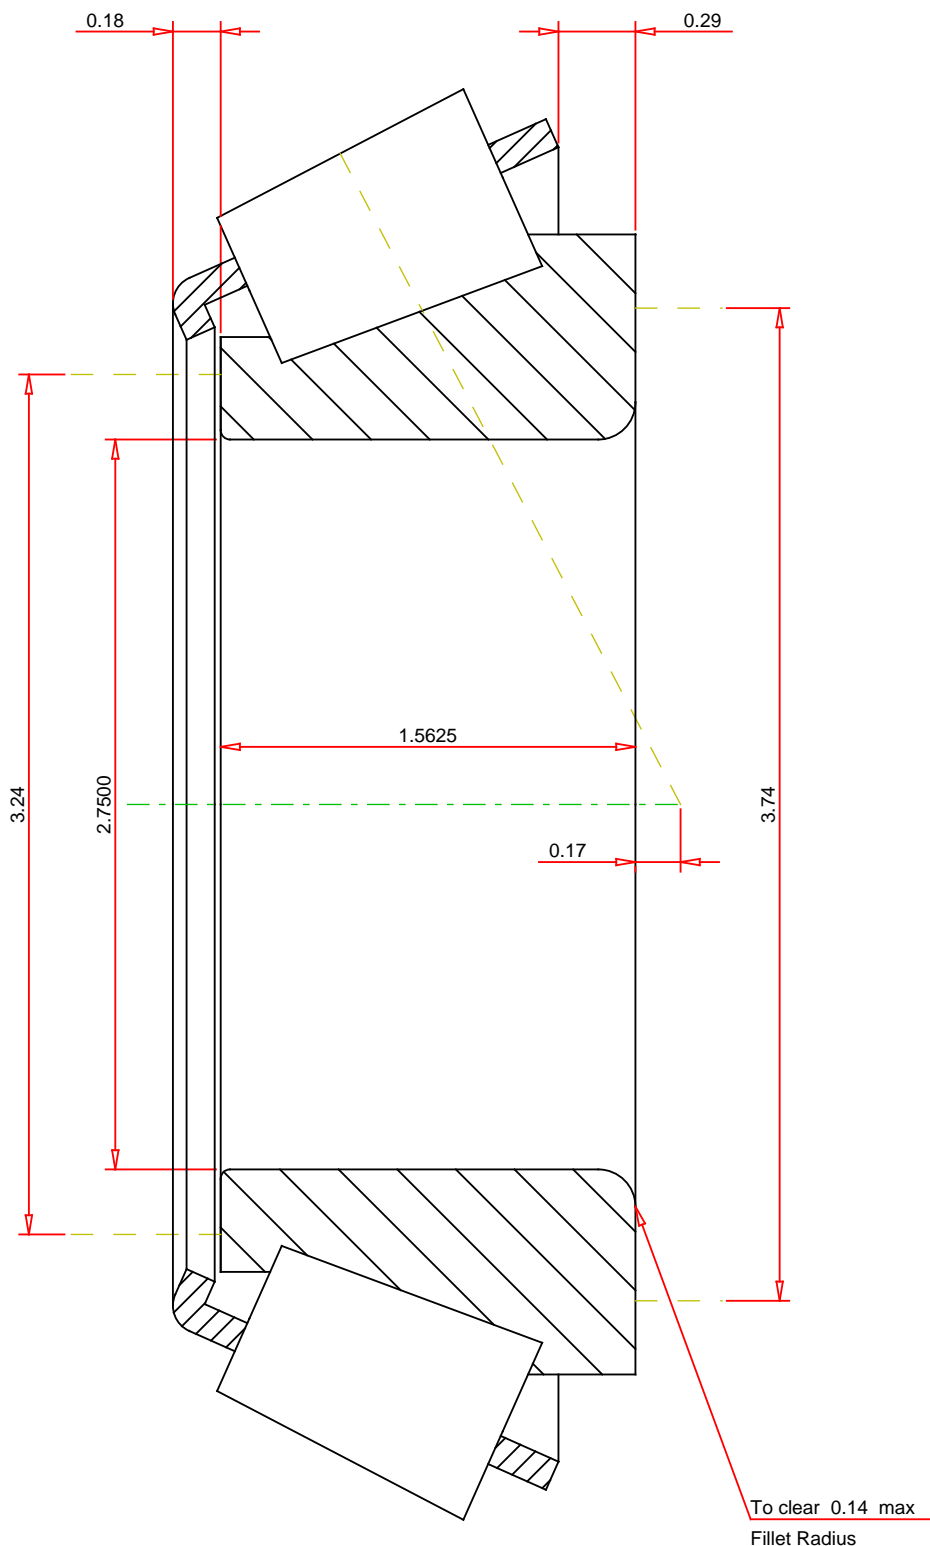

IMPERIAL UNITS

<div>Number of Rollers Per Row15</div>	<div><div>TIMKEN®</div><div>THE TIMKEN COMPANY</div><div>NORTH CANTON, OHIO USA</div></div>	<div><div>H913849</div><div>SINGLE TAPERED CONE</div></div> <div><table><tr><td>K Factor</td><td>0.75</td><td></td></tr><tr><td>Dynamic Radial Rating - C90</td><td>15900</td><td>lbf</td></tr><tr><td>Dynamic Thrust Rating - Ca90</td><td>21300</td><td>lbf</td></tr><tr><td>Dynamic Radial Rating - C1</td><td>61300</td><td>lbf</td></tr></table></div>	K Factor	0.75		Dynamic Radial Rating - C90	15900	lbf	Dynamic Thrust Rating - Ca90	21300	lbf	Dynamic Radial Rating - C1	61300	lbf
K Factor	0.75													
Dynamic Radial Rating - C90	15900	lbf												
Dynamic Thrust Rating - Ca90	21300	lbf												
Dynamic Radial Rating - C1	61300	lbf												

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY