

Grease Gun Couplers and Lubrication Accessories

Description	Images and specifications can be subject to change without notice	Part No.
-------------	---	----------

MATO Heavy Duty Hydraulic Safety-Coupler safeLOCK

Hydraulic safety-coupler safeLOCK
Precision made


- with hardened 4-jaws made of tool steel
- with high-performance hydraulic-gasket
- with integrated linear-swivel
- uncoupling at more than 600 bar is possible
- no spurt / mess when uncoupling
- outer diameter according to DIN

Hydraulic safety-coupler safeLOCK 1/8" BSP (32mm Standard)	32 456 03	
Hydraulic safety-coupler safeLOCK M10x1 (32mm Standard)	32 455 04	
Hydraulic safety-coupler safeLOCK-L 1/8" BSP (Long)	32 458 01	
Hydraulic safety-coupler safeLOCK-L M10x1 (Long)	32 457 02	

safeLOCK



safeLOCK-L

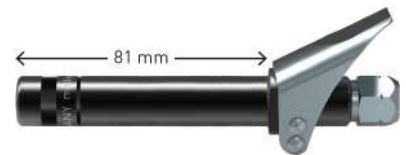

MATO Heavy Duty 4-Jaw Hydraulic Coupler

Precision made coupler, DIN 1283, for grease fittings
DIN 71412, with machined and hardened jaws for optimal
sealing and long lifetime, hexagon 15 mm

4-jaw hydraulic coupler, 1/8" BSP	32 440 40	
4-jaw hydraulic coupler, 1/8" NPT	32 438 90	
4-jaw hydraulic coupler, M10x1	32 438 07	



STANDARD 4-Jaw Hydraulic Coupler

General purpose coupler with hardened jaws, hexagon 14 mm

4-jaw hydraulic coupler, 1/8" BSP	HC5
-----------------------------------	------------



Straight Steel Tubes

Straight Steel Extension Tubes 1/8" BSP Male both ends

Straight Steel Tube 6" (150mm)	SRT6
Straight Steel Tube 10" (250mm)	SRT10



Cranked Steel Tubes

Cranked Steel Extension Tubes 1/8" BSP Male both ends

Cranked Steel Tube 6" (150mm)	BRT6
Cranked Steel Tube 10" (250mm)	BRT10



Snap-on Adaptor Only

Snaps on to standard hydraulic couplers.
Slide down sleeve to keep attached. Slide up sleeve to release.

Threaded 1/8" BSPF to fit a range of tubes and hoses	54-2089
--	----------------



Lube Injector

For injection of Oil or Grease. E.g Into Bearings or Seals.
For connecting into a 4 Jaw Hydraulic Coupler.

Lube Injector-S with grease fitting	32 408 20
Lube Injector-D with Snap-on Coupling	32 408 44



Handy Slim-fit Grease Connector

Snaps on to standard hydraulic couplers enabling connection
and release from difficult to access grease nipples.
8mm OD x 100mm Straight Tube with 8mm Concave Connector.

Handy Slimfit Grease Connector	32 405 92
--------------------------------	------------------

