


Swivel ball joint Mod. GA



ISO 8139.
Material: zinc-plated steel.




Mod.	$\varnothing$ CN ^(H7)	U	EN	ER	AX	CE	KK	$\varnothing$ T	Z	SW
GA-32	10	10,5	14	14	20	43	M10X1,25	15	6,5	17
GA-40	12	12	16	16	22	50	M12X1,25	17,5	6,5	19
GA-50-63	16	15	21	21	28	64	M16X1,5	22	7,5	22
GA-80-100	20	18	25	25	33	77	M20x1,5	27,5	7	30
GA-41-125	30	25	37	37	51	110	M27x2	40	7,5	41

Piston rod socket joint Mod. GY




Material: zama and zinc-plated steel.

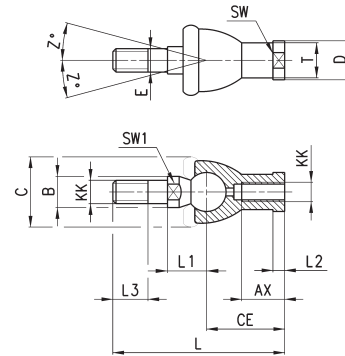


DIMENSIONS														
Mod.	$\varnothing$	KK	L	CE	L2	AX	SW	SW1	L1	L3	$\varnothing$ T	$\varnothing$ D	E	$\varnothing$ B
GY-32	32	M10X1,25	74	35	6,5	18	17	11	19,5	15	15	19	10	14
GY-40	40	M12X1,25	84	40	6,5	20	19	17	21	17	17,5	22	12	19
GY-50-63	50-63	M16X1,5	112	50	8	27	22	19	27,5	23	22	27	16	22
GY-80-100	80-100	M20x1,5	133	63	10	38	30	24	31,5	25	27,5	34	20	27

Rod fork end Mod. G



ISO 8140
Material: zinc-plated steel




Mod.	$\varnothing$ CK	LE	CM	CL	ER	CE	KK	B	$\varnothing$ B1
G-25-32	10	20	10	20	12	40	M10 X 1,25	26	18
G-40	12	24	12	24	14	48	M12 X 1,25	32	20
G-50-63	16	32	16	32	19	64	M16 X 1,5	40	26
G-80-100	20	40	20	40	25	80	M20 X 1,5	48	34
G-41-125	30	54	30	55	38	110	M27 X 2	74	48

Piston rod lock nut Mod. U



ISO 4035
Material: zinc-plated steel.



Mod.	D	m	SW
U-25-32	M10X1,25	6	17
U-40	M12X1,25	7	19
U-50-63	M16X1,5	8	24
U-80-100	M20x1,5	9	30
U-41-125	M27x2	12	41