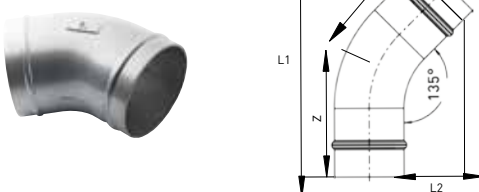


Ø 16.5 25 40		90° ELBOW <table><tr><th>Transair®</th><th>ØD</th><th>ØG</th><th>L</th><th>Z</th><th>Kg</th></tr><tr><td>6602 17 00</td><td>16.5</td><td>34</td><td>58</td><td>31</td><td>0.065</td></tr><tr><td>6602 25 00</td><td>25</td><td>44.5</td><td>69.5</td><td>40</td><td>0.120</td></tr><tr><td>6602 40 00</td><td>40</td><td>67</td><td>103</td><td>62</td><td>0.410</td></tr></table>	Transair®	ØD	ØG	L	Z	Kg	6602 17 00	16.5	34	58	31	0.065	6602 25 00	25	44.5	69.5	40	0.120	6602 40 00	40	67	103	62	0.410
Transair®	ØD	ØG	L	Z	Kg																					
6602 17 00	16.5	34	58	31	0.065																					
6602 25 00	25	44.5	69.5	40	0.120																					
6602 40 00	40	67	103	62	0.410																					
Ø 50 63		<table><tr><th>Transair®</th><th>ØD</th><th>ØG</th><th>L</th><th>Z</th><th>Kg</th></tr><tr><td>6602 50 00</td><td>50</td><td>80</td><td>116</td><td>56</td><td>0.804</td></tr><tr><td>6602 63 00</td><td>63</td><td>91</td><td>124</td><td>61</td><td>0.970</td></tr></table>	Transair®	ØD	ØG	L	Z	Kg	6602 50 00	50	80	116	56	0.804	6602 63 00	63	91	124	61	0.970						
Transair®	ØD	ØG	L	Z	Kg																					
6602 50 00	50	80	116	56	0.804																					
6602 63 00	63	91	124	61	0.970																					
Ø 76 100 168		<table><tr><th>Transair®</th><th>ØD</th><th>L</th><th>Z</th><th>Kg</th></tr><tr><td>RX02 L1 00</td><td>76</td><td>227</td><td>189</td><td>1.033</td></tr><tr><td>RX02 L3 00</td><td>100</td><td>278</td><td>227</td><td>1.417</td></tr><tr><td>RA02 L8 00</td><td>168</td><td>269</td><td>185</td><td>3.074</td></tr></table> Use 2 connectors RR01 to connect 90° elbow RX12 and RA02 to Transair® aluminium pipe Ø76, Ø100 or Ø168.	Transair®	ØD	L	Z	Kg	RX02 L1 00	76	227	189	1.033	RX02 L3 00	100	278	227	1.417	RA02 L8 00	168	269	185	3.074				
Transair®	ØD	L	Z	Kg																						
RX02 L1 00	76	227	189	1.033																						
RX02 L3 00	100	278	227	1.417																						
RA02 L8 00	168	269	185	3.074																						

Ø 25 40		45° ELBOW <table><tr><th>Transair®</th><th>ØD</th><th>ØG</th><th>L</th><th>Z</th><th>Kg</th></tr><tr><td>6612 25 00</td><td>25</td><td>44.5</td><td>61.5</td><td>32.5</td><td>0.115</td></tr><tr><td>6612 40 00</td><td>40</td><td>67</td><td>90</td><td>45</td><td>0.370</td></tr></table>	Transair®	ØD	ØG	L	Z	Kg	6612 25 00	25	44.5	61.5	32.5	0.115	6612 40 00	40	67	90	45	0.370						
Transair®	ØD	ØG	L	Z	Kg																					
6612 25 00	25	44.5	61.5	32.5	0.115																					
6612 40 00	40	67	90	45	0.370																					
Ø 50 63		<table><tr><th>Transair®</th><th>ØD</th><th>ØG</th><th>L</th><th>Z</th><th>Kg</th></tr><tr><td>6612 50 00</td><td>50</td><td>80</td><td>98</td><td>38</td><td>0.771</td></tr><tr><td>6612 63 00</td><td>63</td><td>91</td><td>100</td><td>37</td><td>0.906</td></tr></table>	Transair®	ØD	ØG	L	Z	Kg	6612 50 00	50	80	98	38	0.771	6612 63 00	63	91	100	37	0.906						
Transair®	ØD	ØG	L	Z	Kg																					
6612 50 00	50	80	98	38	0.771																					
6612 63 00	63	91	100	37	0.906																					
Ø 76 100 168		<table><tr><th>Transair®</th><th>ØD</th><th>L1</th><th>L2</th><th>Z</th><th>Kg</th></tr><tr><td>RX12 L1 00</td><td>76</td><td>236</td><td>151</td><td>122</td><td>0.704</td></tr><tr><td>RX12 L3 00</td><td>100</td><td>271</td><td>184</td><td>138</td><td>1.309</td></tr><tr><td>RA12 L8 00</td><td>168</td><td>294</td><td>241</td><td>137</td><td>2.366</td></tr></table> Use 2 connectors RR01 to connect 45° elbows RX12 and RA12 to Transair® aluminium pipe Ø76, Ø100 or Ø168.	Transair®	ØD	L1	L2	Z	Kg	RX12 L1 00	76	236	151	122	0.704	RX12 L3 00	100	271	184	138	1.309	RA12 L8 00	168	294	241	137	2.366
Transair®	ØD	L1	L2	Z	Kg																					
RX12 L1 00	76	236	151	122	0.704																					
RX12 L3 00	100	271	184	138	1.309																					
RA12 L8 00	168	294	241	137	2.366																					