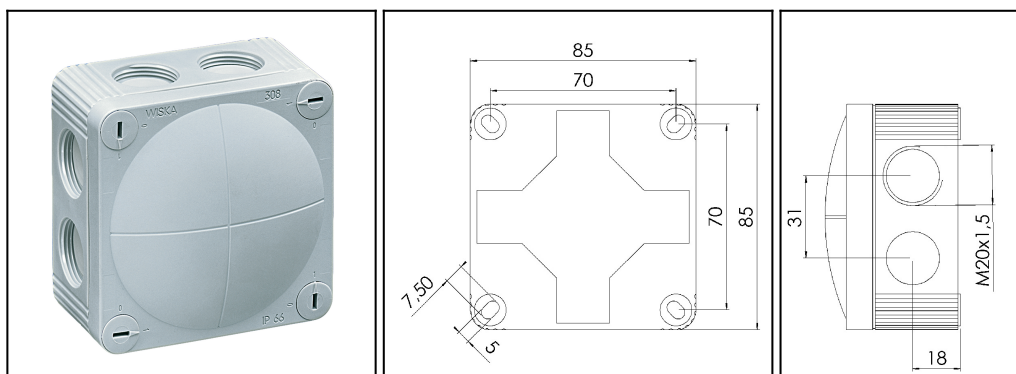


**Protection class to EN 60 529:**

IP 66

Flame protection:

Glow wire test 750 C acc. to EN 60695-2-11

Temperatures during installation:

-5°C to 60°C

Temperature range of material:

-30°C to 100°C, intermittent up to approx. 120°C

Voltage:

400 V

Material:

Polypropylene, reinforced glass fibre; Sealing: thermoplastic elastomere

Terminals/poles:4 mm²**Fixing:**

With mounting clip or 4 internal openings outside of the sealing area

Equipment:

8 elastic self-sealing membranes for cable entry without mechanical devices

- 8 integrated M 20 threads, no locknuts necessary

- 4 captive quick-release lid screws

- Incl. mounting clip for snap-on fixing

- Colour RAL 7035 light grey

- .../S = black

- .../W = white

- .../DR = grey box with red cover

- .../ESKV = incl. 3 pcs. ESKV M 20 (*Sealing range 6 - 13 mm)

Accessories:

- DN 48: screwing sleeves for fixing profile rails, WISKA-No. 10060372

- DIN RAIL KIT 108, 308: Rail TS 15 + Fixing material, WISKA-No. 10060362

- EC 308 Earthing plate: WISKA No. 10101473

- Adapter 308/1210: WISKA No. 10101477

Type	WISKA-No.		 mm		L x B x H external / außen mm
COMBI 308/leer	10060400	5/100	3 - 12		85 x 85 x 51
COMBI 308/leer/S	10060581	5/100	3 - 12		85 x 85 x 51
COMBI 308/leer/W	10060610	5/100	3 - 12		85 x 85 x 51
COMBI 308/leer/DR	10060480	5/100	3 - 12		85 x 85 x 51
COMBI 308/ESKV	10060403	5/100	3 - 12*		85 x 85 x 51
COMBI 308/5	10060401	5/100	3 - 12		85 x 85 x 51
COMBI 308/5/S	10060580	5/100	3 - 12		85 x 85 x 51
COMBI 308/5/W	10060611	5/100	3 - 12		85 x 85 x 51
COMBI 308/FK 150	10060530	5/100	3 - 12		85 x 85 x 51
COMBI 308/FK 230	10060520	5/100	3 - 12		85 x 85 x 51
COMBI 308/FK 250	10060521	5/100	3 - 12		85 x 85 x 51
DIN RAIL KIT 308	10060362	1	—	—	--

© 2014 WISKA Hoppmann & Mulsow GmbH

Kisdorfer Weg 28

D-24568 Kaltenkirchen

Phone: +49 (0)4191 / 508-100

Fax: +49 (0)4191 / 508-209