

Rotary Table/Rack & Pinion Style

Series *MSQ*

With External Shock Absorber

Size: 10, 20, 30, 50

How to Order

MSQ B 10 L 2 - M9BW S

Size

10
20
30
50

Shock absorber type

L	Shock absorber for low energy
H	Shock absorber for high energy

Port location/Rotation

2	Standard type	180°
3	Standard type	90°
4	Symmetric type	180°
5	Symmetric type	90°

Refer to the table to the right.

Thread type

End port type	Size
Nil	M 5
Nil	Rc 1/8
-XF	G 1/8
-XN	NPT 1/8

* Side ports are all M5.

Number of auto switch


Nil	2 pcs.
S	1 pc.
n	n pcs.

Auto switch type

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the table below for auto switch types.

Port location/Rotation

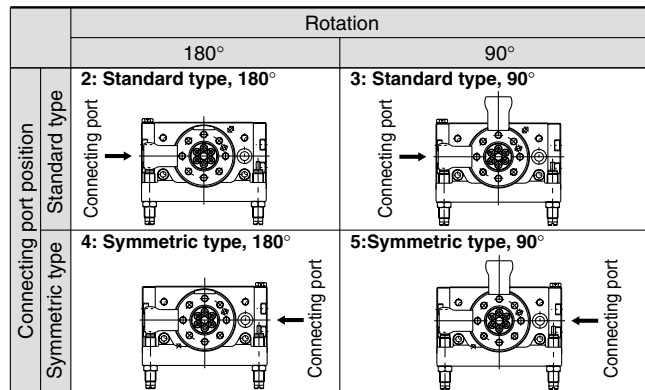

Applicable Auto Switch/Refer to pages 761 to 809 for detailed auto switch specification.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load	
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)			
Solid state switch	Diagnostic indication (2-color display)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit
				3-wire (PNP)				M9PV	M9P	●	●	●	○	○	
				2-wire				M9BV	M9B	●	●	●	○	○	—
				3-wire (NPN)				M9NWV	M9NW	●	●	●	○	○	IC circuit
				3-wire (PNP)				M9PWV	M9PW	●	●	●	○	○	
				2-wire				M9BWV	M9BW	●	●	●	○	○	—
	Water resistant (2-color indication)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NAV**	M9NA**	○	○	●	○	○	IC circuit
				3-wire (PNP)				M9PAV**	M9PA**	○	○	●	○	○	
				2-wire				M9BAV**	M9BA**	○	○	●	○	○	—
				3-wire (NPN equiv.)				A96V	A96	●	—	●	—	—	IC circuit
Reed switch	—	Grommet	Yes	2-wire	24 V	12 V	100 V or less	A93V	A93	●	—	●	—	—	—
				2-wire				A90V	A90	●	—	●	—	—	IC circuit

** Although it is possible to mount water resistant type auto switches, note that the rotary actuator itself is not of water resistant construction.

* Lead wire length symbols: 0.5 m Nil (Example) M9NW
 1 m M (Example) M9NWM
 3 m L (Example) M9NWL
 5 m Z (Example) M9NWZ

* Auto switches marked with a "○" are produced upon receipt of orders.

* Auto switches are shipped together, (but not assembled).




Refer to pages 796 and 797 for the details of solid state auto switch with pre-wired connector.

Specifications




JIS symbol



Size		10	20	30	50
Fluid		Air (non-lube)			
Maximum operating pressure		1 MPa			
Minimum operating pressure		0.2 MPa			
Ambient and fluid temperature		0 to 60°C (with no freezing)			
Cushion		Shock absorber			
Shock absorber type	For low energy	RB0805	RB1006		RB1411
	For high energy	RB0806	RB1007		RB1412
Rotation		90°, 180°			
Angle adjusting range		Each rotation end ±3°			
Cylinder bore size		ø15	ø18	ø21	ø25
Port size	End ports	M5 x 0.8		Rc 1/8, G 1/8, NPT 1/8	
	Side ports	M5 x 0.8			

The service life of the shock absorber may be different from the rotary table body depending on the operating conditions. Refer to Specific Product Precautions for the suitable replacement period.

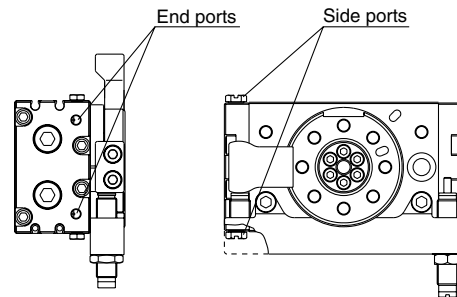

Allowable Kinetic Energy and Rotation Time Adjustment Range

Size	Allowable kinetic energy (J) ^{Note 1)}		Rotation time adjustment range for stable operation (s/90°)
	Shock absorber for low energy	Shock absorber for high energy	
10	0.161	0.231	0.2 to 1.0 ^{Note 2)}
20	0.574	1.060	
30	0.805	1.210	
50	1.310	1.820	

Note 1) If operated where the kinetic energy exceeds the allowable value, this may cause damage to the internal parts and result in product failure. Please pay special attention to the kinetic energy levels when designing and during operation to avoid exceeding the allowable limit.

Note 2) Values above indicate the time between the start of rotation and the deceleration caused by the shock absorber. Although the time required by the rotary table to reach the rotation end after deceleration differs depending on the operating conditions (inertial moment of the load, rotation speed and operating pressure), approximately 0.2 to 2 seconds are required. The range of angles within which the shock absorber operates is between the rotation end and the values shown below.

Size	10	20	30	50
For low energy	7.1°	6.9°	6.2°	9.6°
For high energy	8.6°	8.0°	7.3°	10.5°

Mass

(g)

Size		10	20	30	50
Basic type	90° specification	630	1200	1520	2480
	180° specification	600	1140	1450	2370
High precision type	90° specification	700	1390	1750	2810
	180° specification	670	1340	1680	2690

Note) Values above do not include auto switch mass.