



Technical data

USFE208


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, single lip seal

KIT CONTENT

US.208.G2, FE208

VISUAL (S)

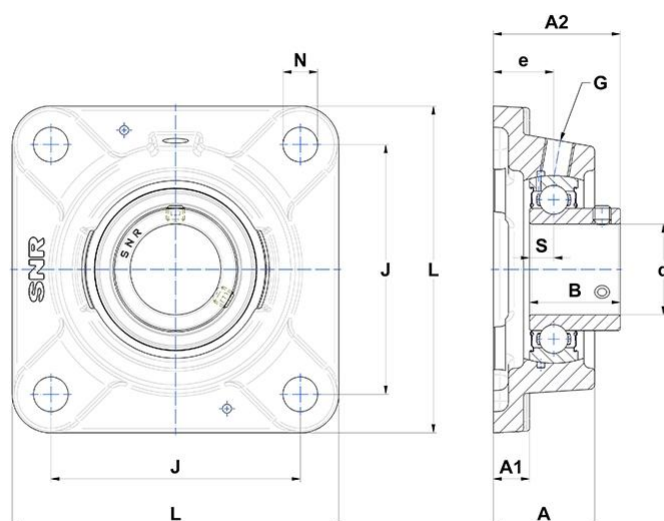

PRODUCT DEFINITION

A - Housing height	39,5 mm
A1 - Housing foot height / flange height	13 mm
A2 - Total height from mounting surface	49 mm
B - Width of Inner Ring	34 mm
d - Shaft diameter	40 mm
e - Distance mounting surface to bearing center	24 mm

PRODUCT DEFINITION

G - Grease fitting	R1/8"
J - Mounting holes distance	101,5 mm
L - Housing width / diameter	130 mm
N - Mounting hole dimension	14 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	9 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	29,6 kN
C0 - Static load rating	18,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	2,01 kg
Recommended tightening torque for set screw	11.5 N-m