


## RED Tube end reducer

EO 24° DKO swivel / EO 24° cone end

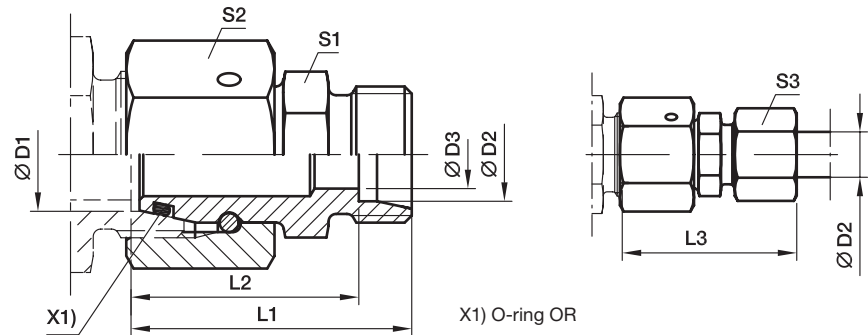

| Series<br><sup>2)</sup> <sup>3)</sup> <sup>4)</sup> | D1 | D2 | D3   | L1   | L2   | L3   | S1 | S2 | S3 | Weight<br>g/1 piece | Order code*   | PN (bar) <sup>1)</sup> |     |
|-----------------------------------------------------|----|----|------|------|------|------|----|----|----|---------------------|---------------|------------------------|-----|
|                                                     |    |    |      |      |      |      |    |    |    |                     |               | Steel                  | 71  |
| L/S                                                 | 35 | 25 | 20.0 | 52.0 | 40.0 | 64.0 | 41 | 50 | 46 | 366                 | RED35L/25SOMD | 250                    | 160 |
| L                                                   | 35 | 28 | 24.0 | 48.0 | 40.5 | 57.0 | 41 | 50 | 41 | 327                 | RED35/28LOMD  | 250                    | 160 |
| L/S                                                 | 35 | 30 | 25.0 | 55.0 | 41.5 | 68.0 | 46 | 50 | 50 | 435                 | RED35L/30SOMD | 250                    | 160 |
| L                                                   | 42 | 10 | 8.0  | 48.5 | 41.5 | 56.0 | 50 | 60 | 19 | 537                 | RED42/10LOMD  | 250                    | 160 |
| L                                                   | 42 | 12 | 10.0 | 48.5 | 41.5 | 56.0 | 50 | 60 | 22 | 538                 | RED42/12LOMD  | 250                    | 160 |
| L                                                   | 42 | 15 | 12.0 | 49.5 | 42.5 | 58.0 | 50 | 60 | 27 | 534                 | RED42/15LOMD  | 250                    | 160 |
| L                                                   | 42 | 18 | 15.0 | 49.5 | 42.0 | 58.0 | 50 | 60 | 32 | 544                 | RED42/18LOMD  | 250                    | 160 |
| L                                                   | 42 | 22 | 19.0 | 51.5 | 44.0 | 60.0 | 50 | 60 | 36 | 543                 | RED42/22LOMD  | 250                    | 160 |
| L                                                   | 42 | 28 | 24.0 | 51.5 | 44.0 | 61.0 | 50 | 60 | 41 | 539                 | RED42/28LOMD  | 250                    | 160 |
| L/S                                                 | 42 | 30 | 25.0 | 57.5 | 44.0 | 70.5 | 50 | 60 | 50 | 588                 | RED42L/30SOMD | 250                    | 160 |
| L                                                   | 42 | 35 | 30.0 | 53.5 | 43.0 | 65.0 | 50 | 60 | 50 | 541                 | RED42/35LOMD  | 250                    | 160 |
| L/S                                                 | 42 | 38 | 32.0 | 61.5 | 45.5 | 76.0 | 55 | 60 | 60 | 701                 | RED42L/38SOMD | 250                    | 160 |

<sup>1)</sup> Pressure shown = item deliverable

<sup>2)</sup> LL = very light series; <sup>3)</sup> L = light series; <sup>4)</sup> S = heavy series

$\frac{PN \text{ (bar)}}{10} = PN \text{ (MPa)}$

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

\*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes |                             |                |                                                         |
|---------------------|-----------------------------|----------------|---------------------------------------------------------|
| Material            | Suffix surface and material | Example        | Standard sealing material (no additional suffix needed) |
| Steel               | CF                          | RED18/15LOMDCF | NBR                                                     |
| Stainless Steel     | 71                          | RED18/15LOMD71 | VIT                                                     |