



Technical data

UCP218


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC218G2, P218

VISUAL (S)

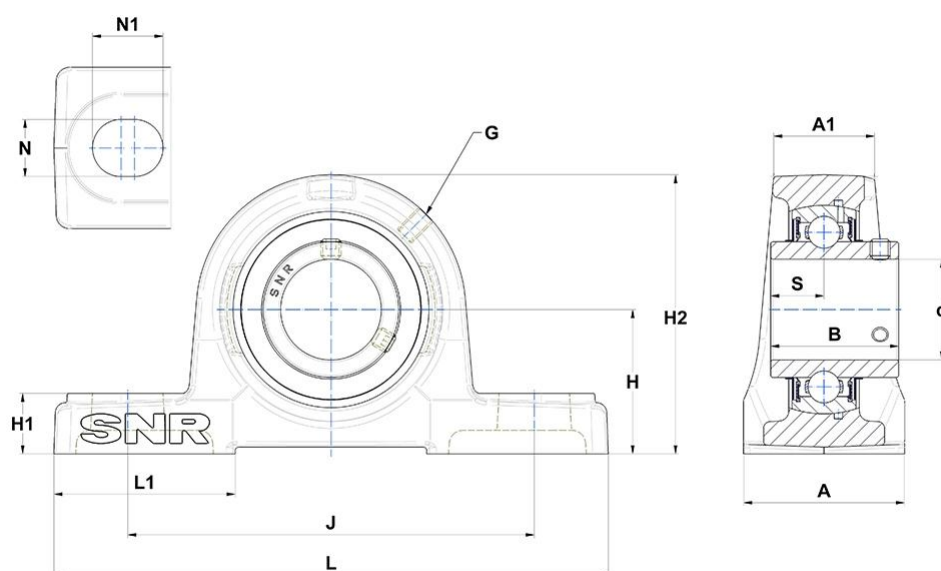

PRODUCT DEFINITION

A - Housing width	88 mm
A1 - Housing top width	55 mm
B - Width of Inner Ring	96 mm
d - Shaft diameter	90 mm
G - Grease fitting	M10x1
H - Distance mounting base to centerline spheric. seating diam.	101,6 mm

PRODUCT DEFINITION

H1 - Housing foot height	34 mm
H2 - Housing height	200 mm
J - Mounting holes distance	262 mm
L - Housing length	327 mm
L1 - Housing foot length	100 mm
N - Mounting hole dimension	27 mm
N1 - Mounting hole length	33 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	39,7 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	96 kN
C0 - Static load rating	71,5 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	13,45 kg
Recommended tightening torque for set screw	33 N-m