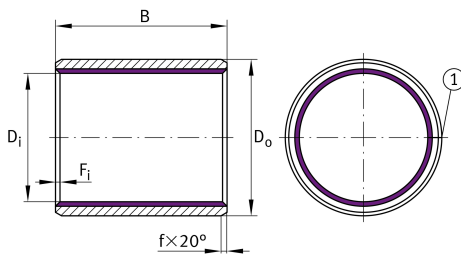
**EGB2525-E40** **Bush**

Metal/polymer composite plain bush,
maintenance-free, ISO 3547, with steel
backing

Technical information**Main Dimensions & Performance Data**

D_i	25 mm	Inner diameter
D_o	28 mm	Outer diameter
B	25 mm	Width
C_r	87,500 N	Basic dynamic load rating, radial
C_{0r}	156,000 N	Basic static load rating, radial
$\approx m$	22.71 g	Weight

Dimensions

f	20 °	Chamfer angle outside diameter
F_{iUT}	0.1 mm	Inner edge break, lower tolerance
F_{iOT}	0.7 mm	Inner edge break, upper tolerance
f	0.6 mm	Outer chamfer
F_{imin}	-0.1 mm	Inner edge break, min.
F_{imax}	-0.7 mm	Inner edge break, max.
D_{iOT}	0.061 mm	Inner diameter, upper tolerance
D_{oOT}	0.075 mm	Outside diameter, upper tolerance
D_{iUT}	0.001 mm	Inner diameter, lower tolerance
D_{oUT}	0.035 mm	Outside diameter, lower tolerance
s_3	1.5 mm	Wall thickness
s_{3OT}	0.005 mm	Wall thickness, upper tolerance
s_{3UT}	-0.025 mm	Wall thickness, lower tolerance
B_{UT}	-0.25 mm	Width, lower tolerance
B_{OT}	0.25 mm	Width, upper tolerance
f_{OT}	0.4 mm	Outer chamfer, upper tolerance
f_{UT}	-0.4 mm	Outer chamfer, lower tolerance
F_i	0.1 mm	Inner edge break



[View product details on medias](#)

08.10.2024, 16:15:37 IST

Temperature range

T _{min}	-200 °C	Operating temperature min.
T _{max}	280 °C	Operating temperature max.