



MASTERColour CDM-TD

MASTERColour CDM-TD 70W/830 RX7s 1CT/12

Range of double-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

Product data

General Information	
Cap-Base	RX7S [RX7s]
Operating Position	P45 [Parallel +/-45D or Horizontal(HOR)]
Life to 5% Failures (Nom)	9000 h
Life To 10% Failures (Nom)	13000 h
Life to 20% Failures (Nom)	15000 h
Life to 50% Failures (Nom)	16000 h
ANSI Code HID	C139/E

Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux (Nom)	6000 lm
Luminous Flux (Rated) (Nom)	6000 lm
Color Designation	Warm White (WW)
Lumen Maintenance 10000 h (Nom)	70 %
Lumen Maintenance 2000 h (Min)	80 %
Lumen Maintenance 2000 h (Nom)	85 %
Lumen Maintenance 5000 h (Min)	70 %
Lumen Maintenance 5000 h (Nom)	80 %
Chromaticity Coordinate X (Nom)	0.443
Chromaticity Coordinate Y (Nom)	0.401
Correlated Color Temperature (Nom)	3000 K

Luminous Efficacy (rated) (Nom)	85 lm/W
Color Rendering Index (Min)	77
Color Rendering Index (Nom)	80

Operating and Electrical	
Power (Rated) (Nom)	71.0 W
Lamp Current Run-Up (Max)	1.4 A
Lamp Current (EM) (Nom)	0.95 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	102 V
Voltage (Min)	86 V
Voltage (Nom)	94 V

Controls and Dimming	
Dimmable	No
Run-Up Time 90% (Max)	3 min


MASTERCLOUR CDM-TD

Mechanical and Housing		Pinch Temperature (Max)		280 °C
Bulb Finish	Clear	Product Data		
Approval and Application		Full product code	871150019782515	
Energy Efficiency Label (EEL)	A	Order product name	MASTERCLOUR CDM-TD 70W/830 RX7s 1CT/12	
Mercury (Hg) Content (Nom)	3.4 mg	EAN/UPC - Product	8711500197825	
Energy Consumption kWh/1000 h	78 kWh	Order code	928082205125	
UV		Numerator - Quantity Per Pack	1	
Pet (Niosh) (Min)	8 h/500lx	Numerator - Packs per outer box	12	
Damage Factor D/fc (Max)	0.3	Material Nr. (12NC)	928082205125	
Luminaire Design Requirements		Net Weight (Piece)	21.000 g	
Bulb Temperature (Max)	500 °C	ILCOS Code	MD/UB-70/830-H-RX7s-22/117.6	

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Lamps may use electronic or electromagnetic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

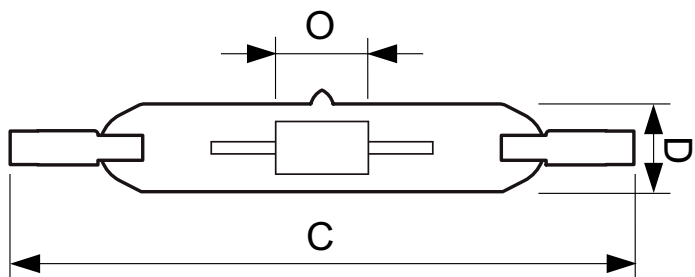


CDM-TD 70W/830 RX7s

Product	D (max)	D	O	C (max)
MASTERCLOUR CDM-TD 70W/830 RX7s 1CT/12	22 mm	0.75 in	8 mm	119.63 mm

MASTERColour CDM-TD


Photometric data

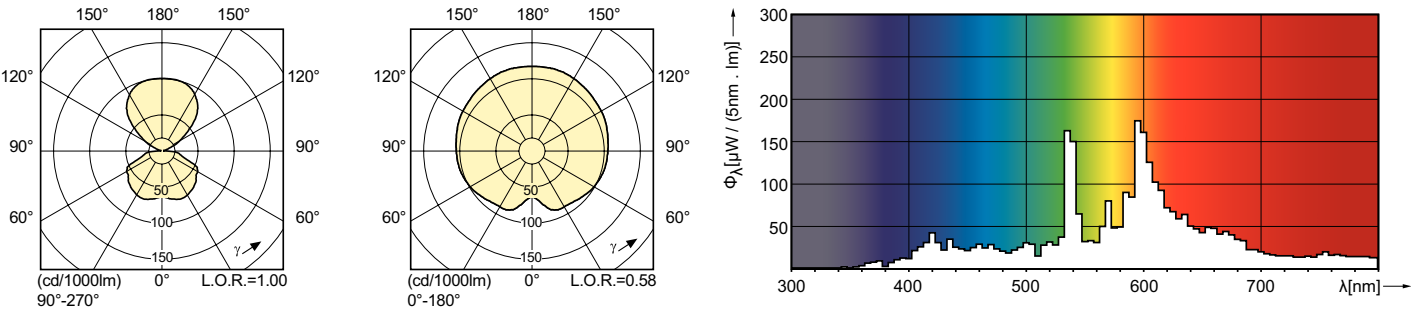

CDM-TD 70W /830

MASTERColour CDM-TD /830

Lifetime

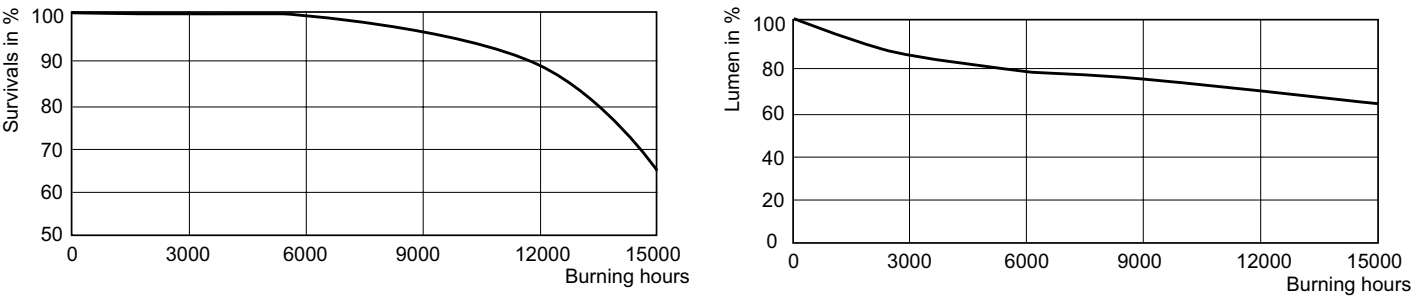

CDM-TD Life Expectancy

CDM-TD Lumen Maintenance

