




Technical datasheet

6810JRLLU/5K

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides

Visual(s)

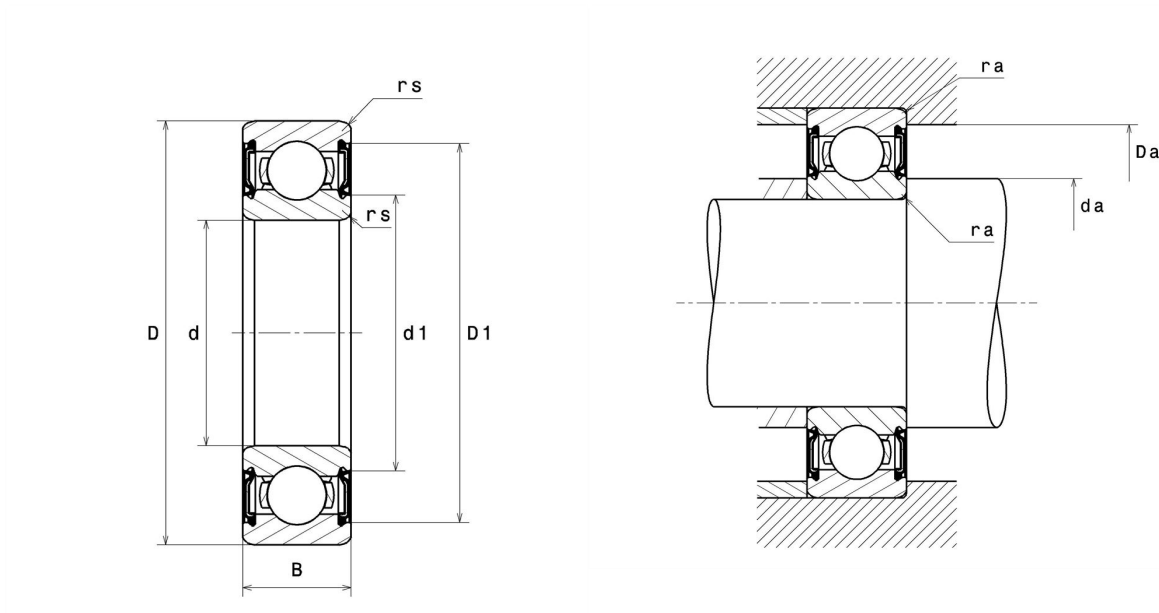

Product definition

d	50 mm
D	65 mm
B	7 mm
rs min	0.3 mm
Radial clearance class	CN
Mass	0.05 kg
Brand	NTN

Product performance

Dynamic load, C	6.6 kN
Static load, C0	6.1 kN
Fatigue limit load, Cu	0.28 kN
f0	16.1
Nlim (grease)	5,300 Tr/min
Min operating temperature, Tmin	-25 °C
Max operating temperature, Tmax	110 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	14.42 Hz
Characteristic outer ring frequency, BPF0	11.17 Hz
Characteristic inner ring frequency, BPFI	12.83 Hz

Abutment dimensions

da min	52 mm
da max	54 mm
Da max	63 mm
ra max	0.3 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$