




Technical datasheet

NJ312ET2X

Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, polyamide cage.

Visual(s)

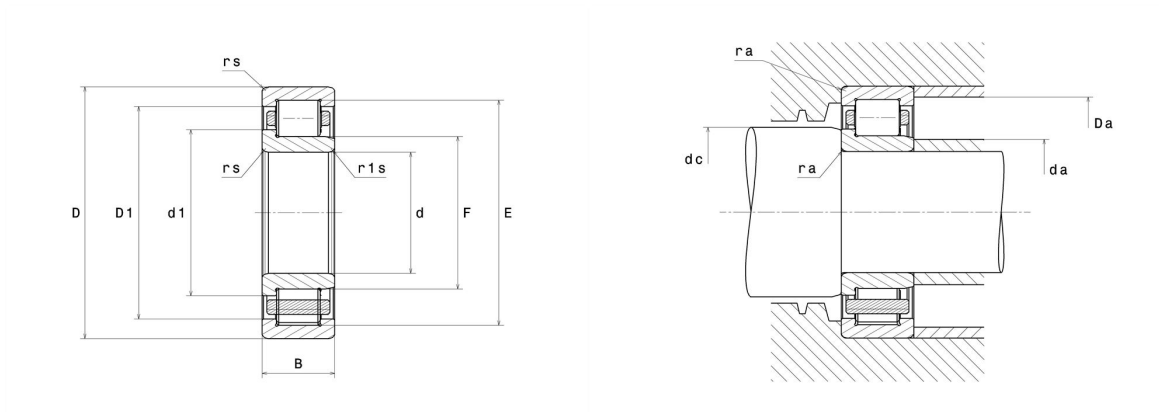

Product definition

d	60 mm
D	130 mm
B	31 mm
E	115 mm
F	77 mm
d1	84.6 mm
rs min	2.1 mm
r1s min	2.1 mm
Radial clearance class	CN
Mass (without HJ ring)	0.2 kg
Brand	NTN

Product performance

Dynamic load, C	150 kN
Static load, C0	157 kN
Fatigue limit load, Cu	19.1 kN
Nlim (oil)	5,800 Tr/min
Nlim (grease)	4,900 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.4 Hz
Characteristic rolling element frequency, BSF	4.86 Hz
Characteristic outer ring frequency, BPF0	5.21 Hz
Characteristic inner ring frequency, BPFI	7.79 Hz

Abutment dimensions

da min	71 mm
da max	75 mm
dc min	86 mm
Da max	119 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$