


Technical data

NKXR15T2Z

Combined bearings

Visual(s)

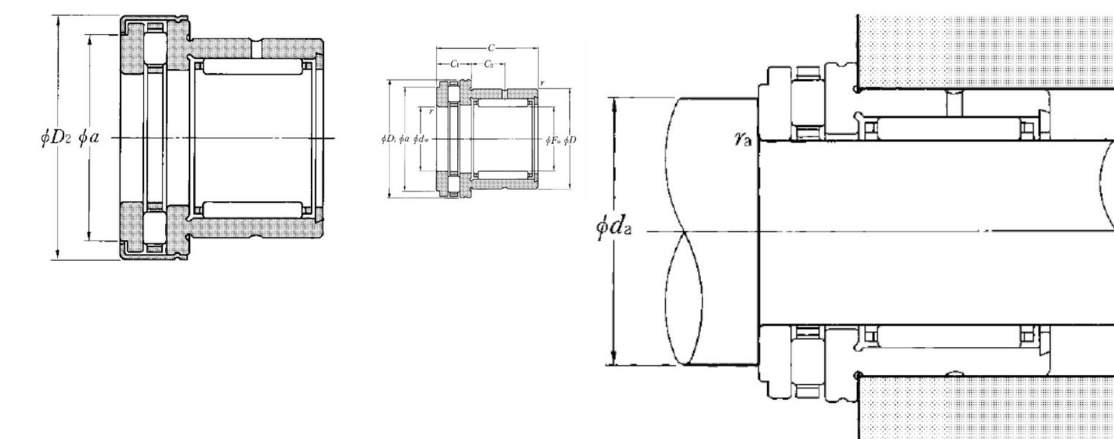

Product definition

Fw	15 mm
dw	15 mm
D	24 mm
D2	29 mm
C	23 mm
C1	9 mm
C2	6.5 mm
a	23.7 mm
rs min	0.3 mm
Dw	2 mm
Dw1	3.5 mm
Lw	9.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Precision class	P0
Mass	0.05 kg
Brand	NTN

Product performance	
Cr	8.25 kN
Ca	12.9 kN
C0r	10.2 kN
C0a	28.6 kN
Nlim (grease)	2,800 Tr/min
Nlim (oil)	11,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions	
da min	25 mm
ras max	0.3 mm