

Series NU2

- T-connector
- plug-in with tube nut
- Ø 3 Ø 4 Ø 6 Ø 8
- plug-in with tube nut
- Ø 3 Ø 4 Ø 6 Ø 8



Working pressure min./max.

-0,95 ... 15 bar

Ambient temperature min./max.

-25 ... 70 °C

Weight per piece

See table below

Technical data

Part No.	Type	Port G	Port D	Delivery unit	Weight per piece
1823391794	NU2-S-RTK	Ø 3	Ø 3	10 piece	0,012 kg
1823391795	NU2-S-RTK	Ø 4	Ø 4	10 piece	0,024 kg
1823391796	NU2-S-RTR	Ø 4	Ø 6	5 piece	0,026 kg
1823391797	NU2-S-RTK	Ø 6	Ø 6	5 piece	0,027 kg
1823391798	NU2-S-RTR	Ø 4	Ø 8	5 piece	0,032 kg
1823391799	NU2-S-RTR	Ø 6	Ø 8	5 piece	0,035 kg
1823391800	NU2-S-RTK	Ø 8	Ø 8	5 piece	0,035 kg

Technical information

For use up to -40 °C when using with compressed air tubing series TU1-S-PAM Ø4x1, Ø6x1, Ø8x1, Ø10x1, Ø12x1.5

For further information about assembling and tolerances of adaptable tubing can be found in the "Technical information" document (available in the MediaCentre).

Technical information


Material

Housing

Brass, nickel-plated

Dimensions

Dimensions

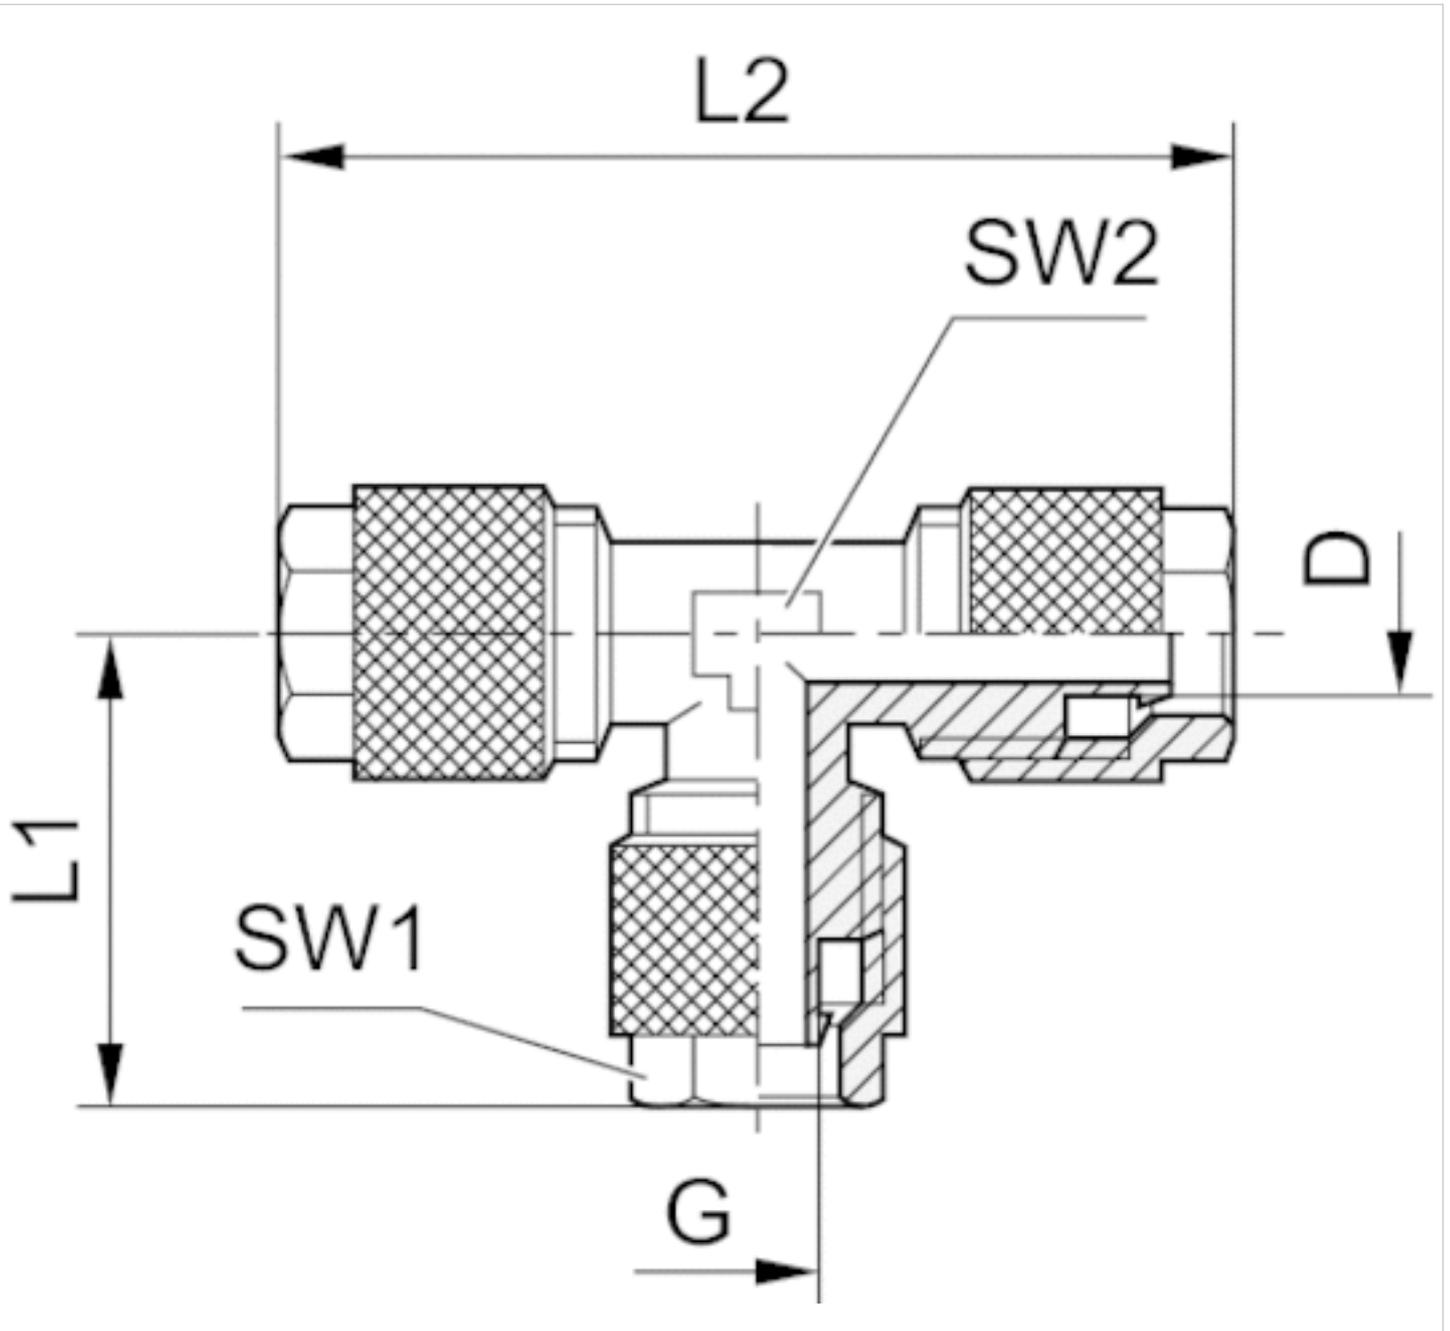

Dimensions

Part No.	Port D	Port G	L1	L2	SW 1	SW 2
1823391794	Ø 3	Ø 3	20.8	41.2	8	8
1823391795	Ø 4	Ø 4	20	41.2	10	8
1823391796	Ø 6	Ø 4	20	40	12	9
1823391797	Ø 6	Ø 6	20	41	12	9
1823391798	Ø 8	Ø 4	19	44	14	11
1823391799	Ø 8	Ø 6	21	44	14	11
1823391800	Ø 8	Ø 8	22.5	45.5	14	11

Connection D = inside diameter of the tubing to be used

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™