



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • Web site: www.timken.com

Part Number 47687, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

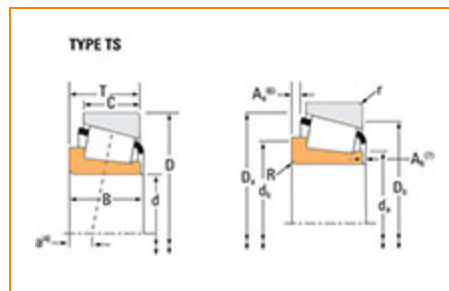

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	47600
Cone Part Number	47687
Design Units	Imperial
Cage Type	Stamped Steel
C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions) ¹	83800 lbf 373000 N
C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions) ²	21700 lbf 96700 N

Dimensions

d - Bore	3.2500 in 82.550 mm
B - Cone Width	1.3125 in 33.338 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius³	0.270 in 6.900 mm
da - Cone Frontface Backing Diameter	3.62 in 92 mm
db - Cone Backface Backing Diameter	4.13 in 105 mm
Ab - Cage-Cone Frontface Clearance	0.12 in 3 mm
Aa - Cage-Cone Backface Clearance	0.08 in 2 mm
a - Effective Center Location⁴	-0.17 in -4.3 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁵	12500 lbf 55500 N
C1 - Dynamic Radial Rating (1 million revolutions)⁶	48100 lbf 214000 N
C0 - Static Radial Rating	58900 lbf 262000 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷	8640 lbf 38400 N

Factors

K - Factor ⁸	1.44
Cg - Geometry Factor ⁹	0.127

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a_3 .

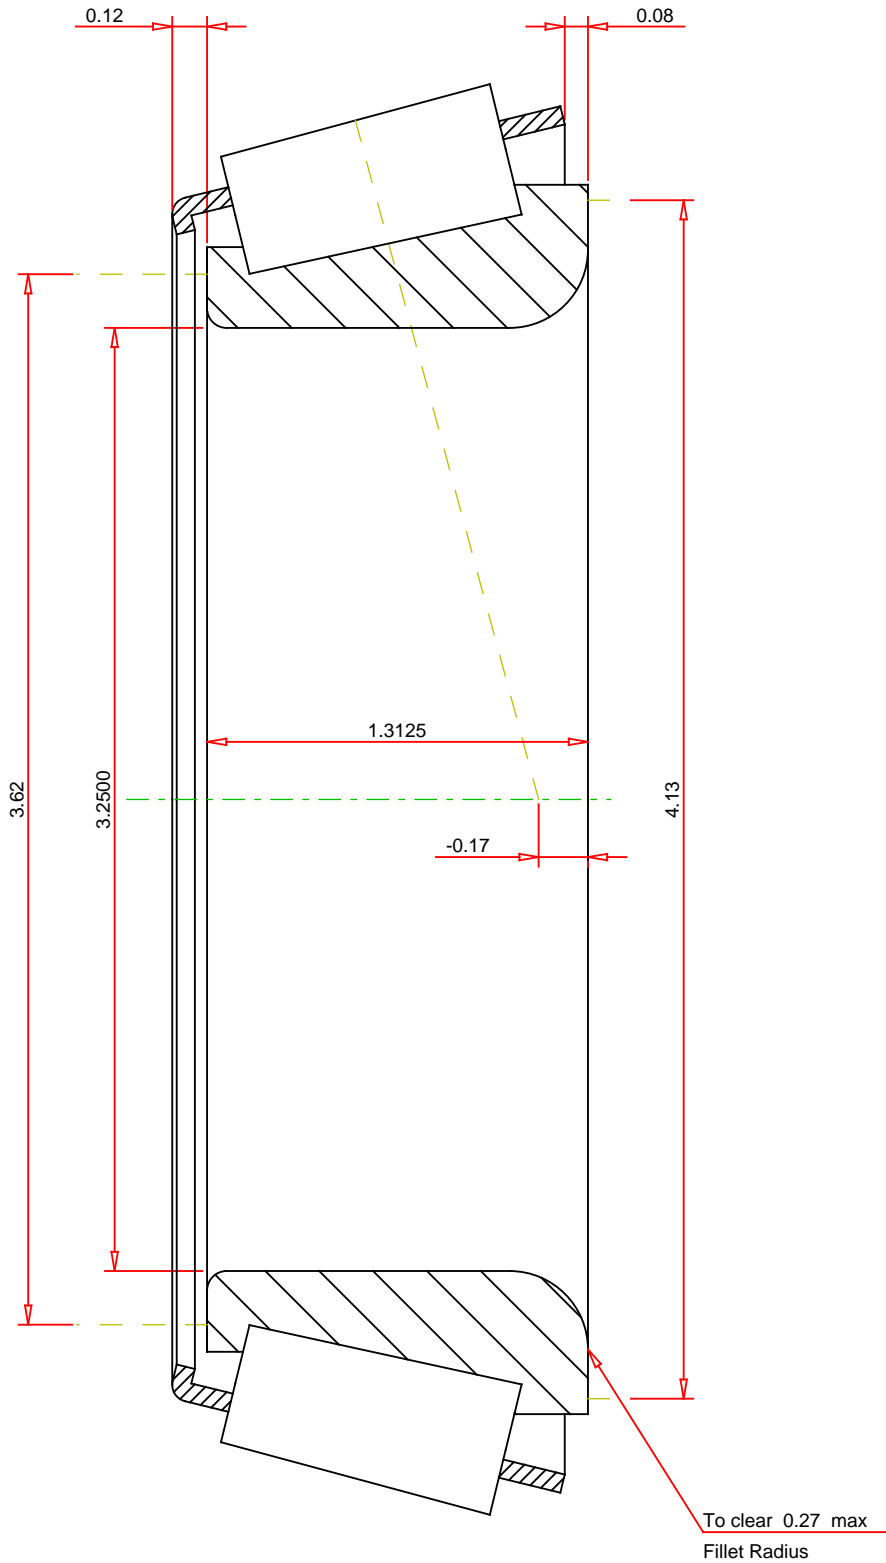

IMPERIAL UNITS

Number of Rollers Per Row 23

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

47687
SINGLE TAPERED CONE

K Factor	1.44
Dynamic Radial Rating - C90	12500 lbf
Dynamic Thrust Rating - Ca90	8640 lbf
Dynamic Radial Rating - C1	48100 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY