



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Bearing Unit - Adapter Sleeve UKF213 - H2313, UKF 200 Four-Bolt Flanged Mounted

Bearings - Adapter Sleeve Locking

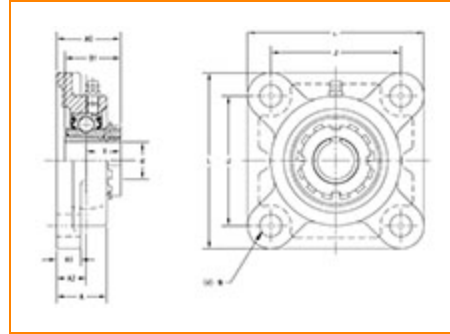


[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bearing Unit - Adapter Sleeve	UK213 - H2313
Shaft Size d	60 mm
Adapter Sleeve Number¹	H2313
Locking Style	Adapter Sleeve Locking
Housing Construction	Four-Bolt Square Flange

Dimensions


Total Length L	187 mm 7.362 in
 Housing Width A	50 mm 1.969 in

Bolt Hole Spacing J	149 mm 5.866 in
Bolt Hole Size N	19 mm 0.748 in
Flange Thickness A1	22 mm 0.866 in
Center of Bearing from Housing End A2	30 mm 1.181 in
Center of Bearing from Bearing End Y	37.5 mm 1.476 in
Dimension B1	65 mm 2.559 in
Dimension A0	67.5 mm 2.656 in
Grease Nipple Size	A-R1/8

Basic Load Ratings

Static Load Rating	40100 N 9015 lbf
Dynamic Load Rating	57200 N 12859 lbf

¹ Purchase the Adapter Sleeve separately

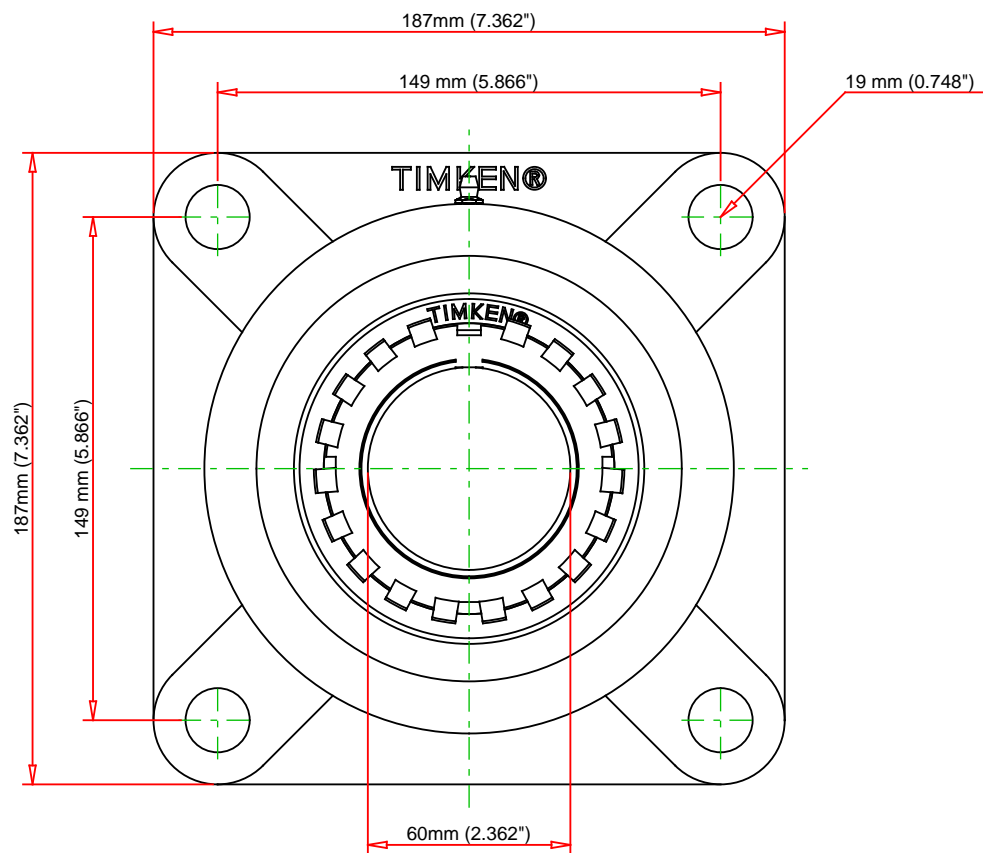

Note: Adapter sold separately

Bearing Number	UK213 - H2313		
Load Ratings - C _r	12859	lbf	57200
Load Ratings - C _{0r}	9015	lbf	40100
Weight	11.2	lb	5.1

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

UKF213 - H2313

UKF 200 Four-Bolt Flanged Mounted Bearings - Adapter Sleeve Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY