

Reservoir, Series NL4-CBS, NL4-CLA, NL6-CBS

- for active carbon filter and lubricator
- Material Polycarbonate Die cast zinc



Type	Reservoir
Certificates	suitable for ATEX
Working pressure min./max.	232 psi
Ambient temperature min./max.	14 ... 140 °F
Medium temperature min./max.	14 ... 140 °F
Lubricator reservoir volume	4.23 fl.oz.
Weight	See table below

Technical data

Part No.	Electrical level indicator	Reservoir	Weight	Fig.
R412003757	with internal query	Polycarbonate	0.397 lbs	Fig. 1
1827009336	-	Polycarbonate	0.331 lbs	Fig. 2
1827009342	-	Die cast zinc, with window	1.21 lbs	Fig. 3


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information


Material	
Reservoir	Polycarbonate Die cast zinc
Seal	Acrylonitrile butadiene rubber

Dimensions


Dimensions, Fig. 1

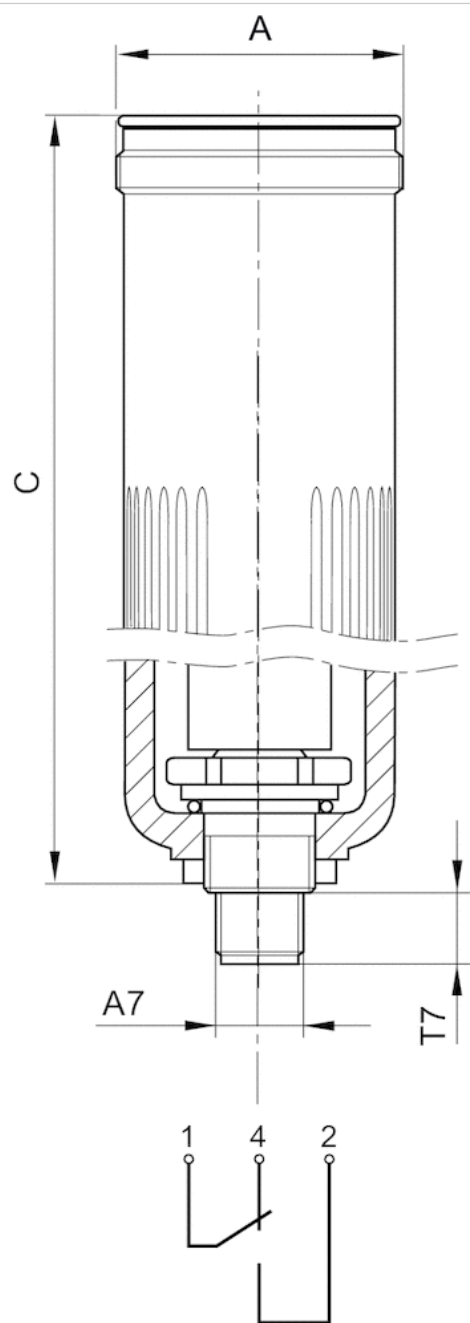

Dimensions, Fig. 2

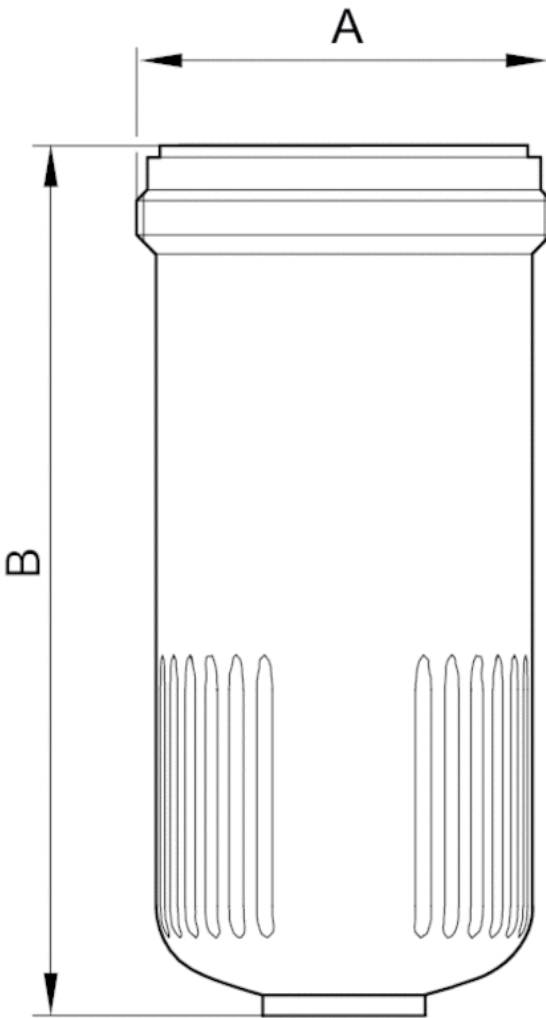

Dimensions, Fig. 3

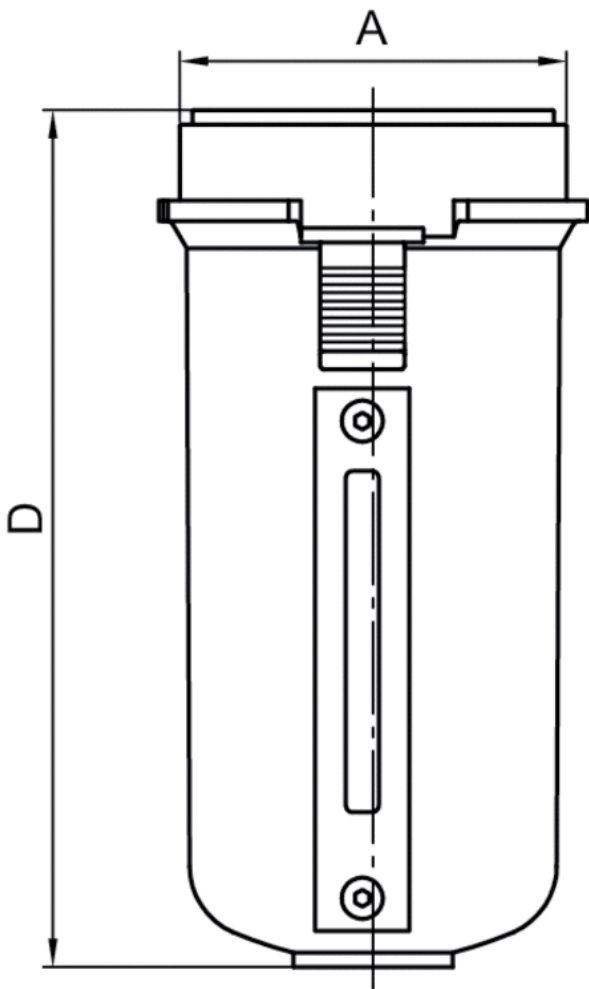

Dimensions in mm

Part No.	A	A7	B	C	D	T7
R412003757	M56x1.5	M12x1	-	129.5	-	12
1827009336	M56x1.5	-	117.5	129.5	-	-
1827009342	Ø53.1	-	-	119	119	-