

# Rear eye with bolt

- for clevis mounting MP2 and AB3
- Cylinder mounting in accordance with CNOMO / NFE 49-001
- Suitable piston Ø 1.26 1.57 1.97 2.48 3.15 3.94 4.92 inch



Standards

CNOMO / NFE 49-001

## Technical data

| Part No.   | Piston Ø  |
|------------|-----------|
| 5210163472 | 1.26 inch |
| 5210263472 | 1.57 inch |
| 5210363472 | 1.97 inch |
| 5210463472 | 2.48 inch |
| 5210563472 | 3.15 inch |
| 5210663472 | 3.94 inch |
| 5210763472 | 4.92 inch |


Scope of delivery: galvanized steel bolts incl. circlips

## Technical information


| Material |                      |
|----------|----------------------|
| Material | Aluminum             |
|          | Cathodic dip-painted |

Dimensions

Rear eye dimensions

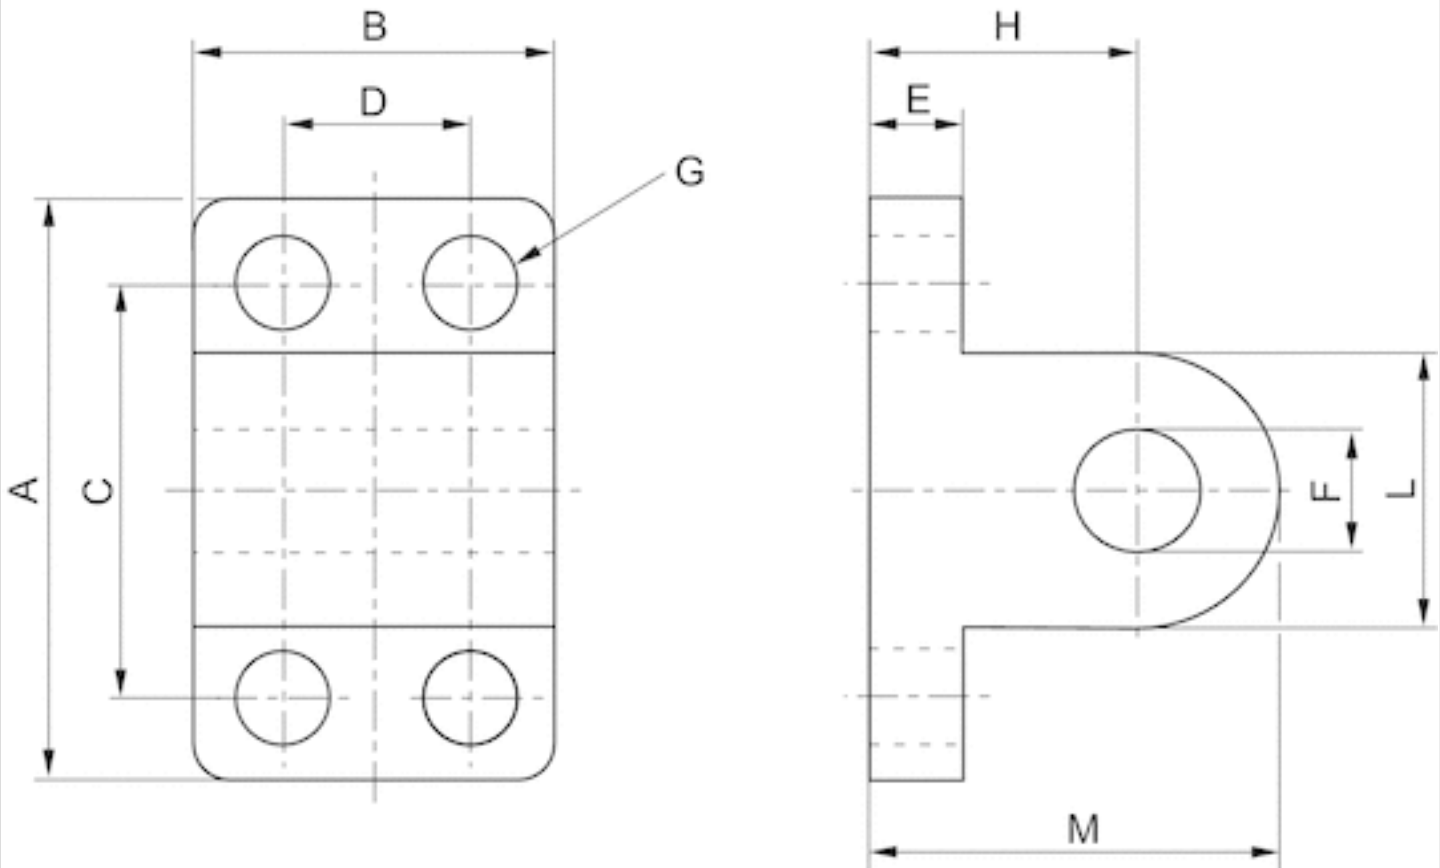

## Bolt dimensions

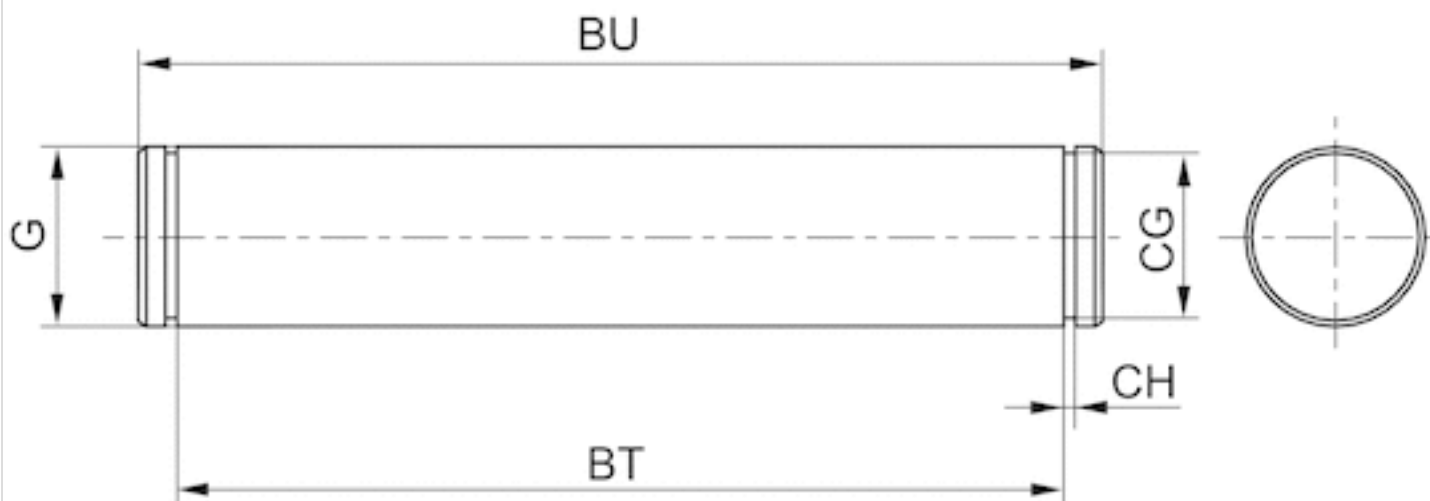

## Dimensions

| Part No.   | Piston Ø  | A   | B  | C  | D  | E  | F H9 | G  | H  | L 1) | M 1) | BT  | BU  | CG   | CH  | G f7 |
|------------|-----------|-----|----|----|----|----|------|----|----|------|------|-----|-----|------|-----|------|
| 5210163472 | 1.26 inch | 40  | 25 | 28 | -  | 8  | 8    | 7  | 18 | 16   | 26   | 46  | 53  | 7.6  | 1.1 | 8    |
| 5210263472 | 1.57 inch | 52  | 32 | 38 | 16 | 10 | 12   | 9  | 26 | 24   | 38   | 53  | 60  | 11.5 | 1.1 | 12   |
| 5210363472 | 1.97 inch | 52  | 32 | 38 | 16 | 10 | 12   | 9  | 26 | 24   | 38   | 66  | 73  | 11.5 | 1.1 | 12   |
| 5210463472 | 2.48 inch | 75  | 46 | 54 | 25 | 12 | 16   | 11 | 34 | 36   | 52   | 76  | 83  | 15.2 | 1.1 | 16   |
| 5210563472 | 3.15 inch | 75  | 46 | 54 | 25 | 12 | 16   | 11 | 34 | 36   | 52   | 96  | 103 | 15.2 | 1.1 | 16   |
| 5210663472 | 3.94 inch | 115 | 56 | 90 | 32 | 16 | 20   | 14 | 41 | 40   | 61   | 117 | 124 | 19   | 1.3 | 20   |
| 5210763472 | 4.92 inch | 115 | 56 | 90 | 32 | 16 | 20   | 14 | 41 | 40   | 61   | 142 | 149 | 19   | 1.3 | 20   |

1) max.