


The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 4370, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

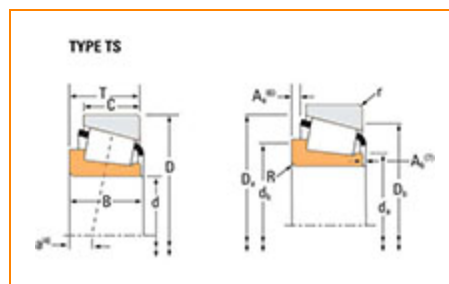

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Cone Part Number	4370
Design Units	Imperial
Cage Type	Stamped Steel
C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)¹	77700 lbf 346000 N
C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)²	20200 lbf 89700 N

Dimensions



d - Cone Bore	1 3/4 in 44.450 mm
B - Cone Width	1.5900 in 40.386 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius³	0.140 in 3.56 mm
da - Cone Frontface Backing Diameter	2.05 in 52 mm
db - Cone Backface Backing Diameter	2.44 in 62 mm
Ab - Cage-Cone Frontface Clearance	0.06 in 1.5 mm
Aa - Cage-Cone Backface Clearance	0.06 in 1.5 mm
a - Effective Center Location⁴	-0.59 in -15 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁵	11600 lbf 51500 N
C1 - Dynamic Radial Rating (1 million revolutions)⁶	44700 lbf 199000 N
C0 - Static Radial Rating	45900 lbf 204000 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷	5640 lbf 25100 N

Factors

K - Factor⁸	2.05
G1 - Heat Generation Factor (Roller-Raceway)	52.9
G2 - Heat Generation Factor (Rib-Roller End)	14.3
Cg - Geometry Factor⁹	0.0872

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a_3 .

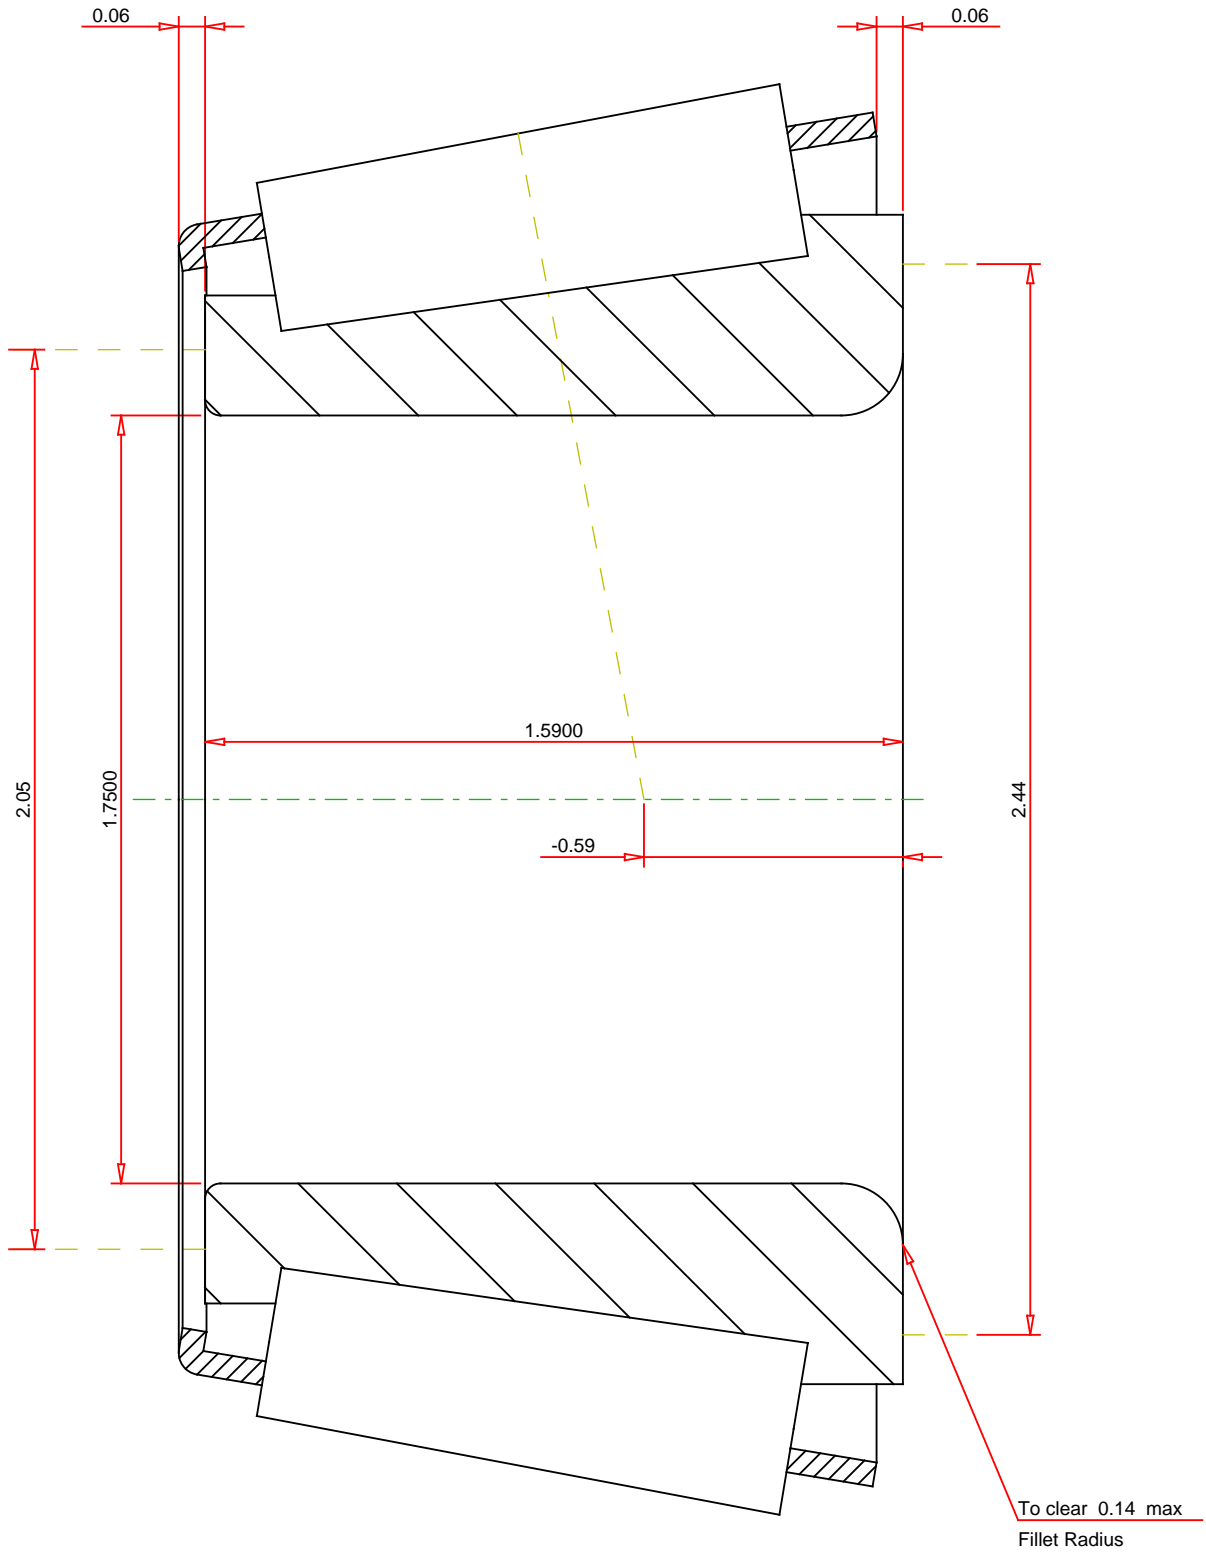

IMPERIAL UNITS

<div>Number of Rollers Per Row15</div>	<div>TIMIKEN®</div> <div>THE TIMKEN COMPANY</div> <div>NORTH CANTON, OHIO USA</div>	<div>4370</div> <div>Tapered Roller Bearings - Single Cones - Imperial</div> <div><div>K Factor2.05</div><div>Dynamic Radial Rating - C9011600 lbf</div><div>Dynamic Thrust Rating - Ca905640 lbf</div><div>Dynamic Radial Rating - C144700 lbf</div></div>
--	---	---