



**The Timken Company**

4500 Mt Pleasant St. NW


N. Canton, OH 44720

**Phone:** (234) 262-3000

**E-Mail:** [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • **Web site:** [www.timken.com](http://www.timken.com)

## Part Number 66212, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

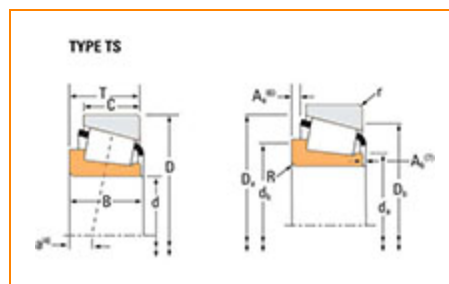

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

### Specifications

<b>Series</b>	66000
<b>Cone Part Number</b>	66212
<b>Design Units</b>	Imperial
<b>Cage Type</b>	Stamped Steel
<b>C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)<sup>1</sup></b>	69100 lbf 307000 N
<b>C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)<sup>2</sup></b>	17900 lbf 79700 N



Dimensions

<b>d - Cone Bore</b>	2 1/8 in 53.975 mm
----------------------	-----------------------

<b>B - Cone Width</b>	1.2500 in 31.750 mm
-----------------------	------------------------

## Abutment and Fillet Dimensions

<b>R - Cone Backface "To Clear" Radius<sup>3</sup></b>	0.140 in 3.6 mm
--	--------------------

<b>da - Cone Frontface Backing Diameter</b>	2.64 in 67 mm
---	------------------

<b>db - Cone Backface Backing Diameter</b>	2.87 in 73 mm
--	------------------

<b>Ab - Cage-Cone Frontface Clearance</b>	0.11 in 2.8 mm
---	-------------------

<b>Aa - Cage-Cone Backface Clearance</b>	0.17 in 4.3 mm
--	-------------------

<b>a - Effective Center Location<sup>4</sup></b>	-0.01 in -0.3 mm
--	---------------------

## Basic Load Ratings

<b>C90 - Dynamic Radial Rating (90 million revolutions)<sup>5</sup></b>	10300 lbf 45800 N
---	----------------------

<b>C1 - Dynamic Radial Rating (1 million revolutions)<sup>6</sup></b>	39700 lbf 177000 N
---	-----------------------

<b>C0 - Static Radial Rating</b>	37300 lbf 166000 N
----------------------------------	-----------------------

<b>C<sub>a90</sub> - Dynamic Thrust Rating (90 million revolutions)<sup>7</sup></b>	11000 lbf 49100 N
---	----------------------

## Factors

<b>K - Factor<sup>8</sup></b>	0.93
<b>G1 - Heat Generation Factor (Roller-Raceway)</b>	50.2
<b>G2 - Heat Generation Factor (Rib-Roller End)</b>	16.4
<b>Cg - Geometry Factor<sup>9</sup></b>	0.0751

<sup>1</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>2</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>3</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>4</sup> Negative value indicates effective center inside cone backface.


<sup>5</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values.

<sup>6</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>7</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>8</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>9</sup> Geometry constant for Lubrication Life Adjustment Factor  $a_3$ .

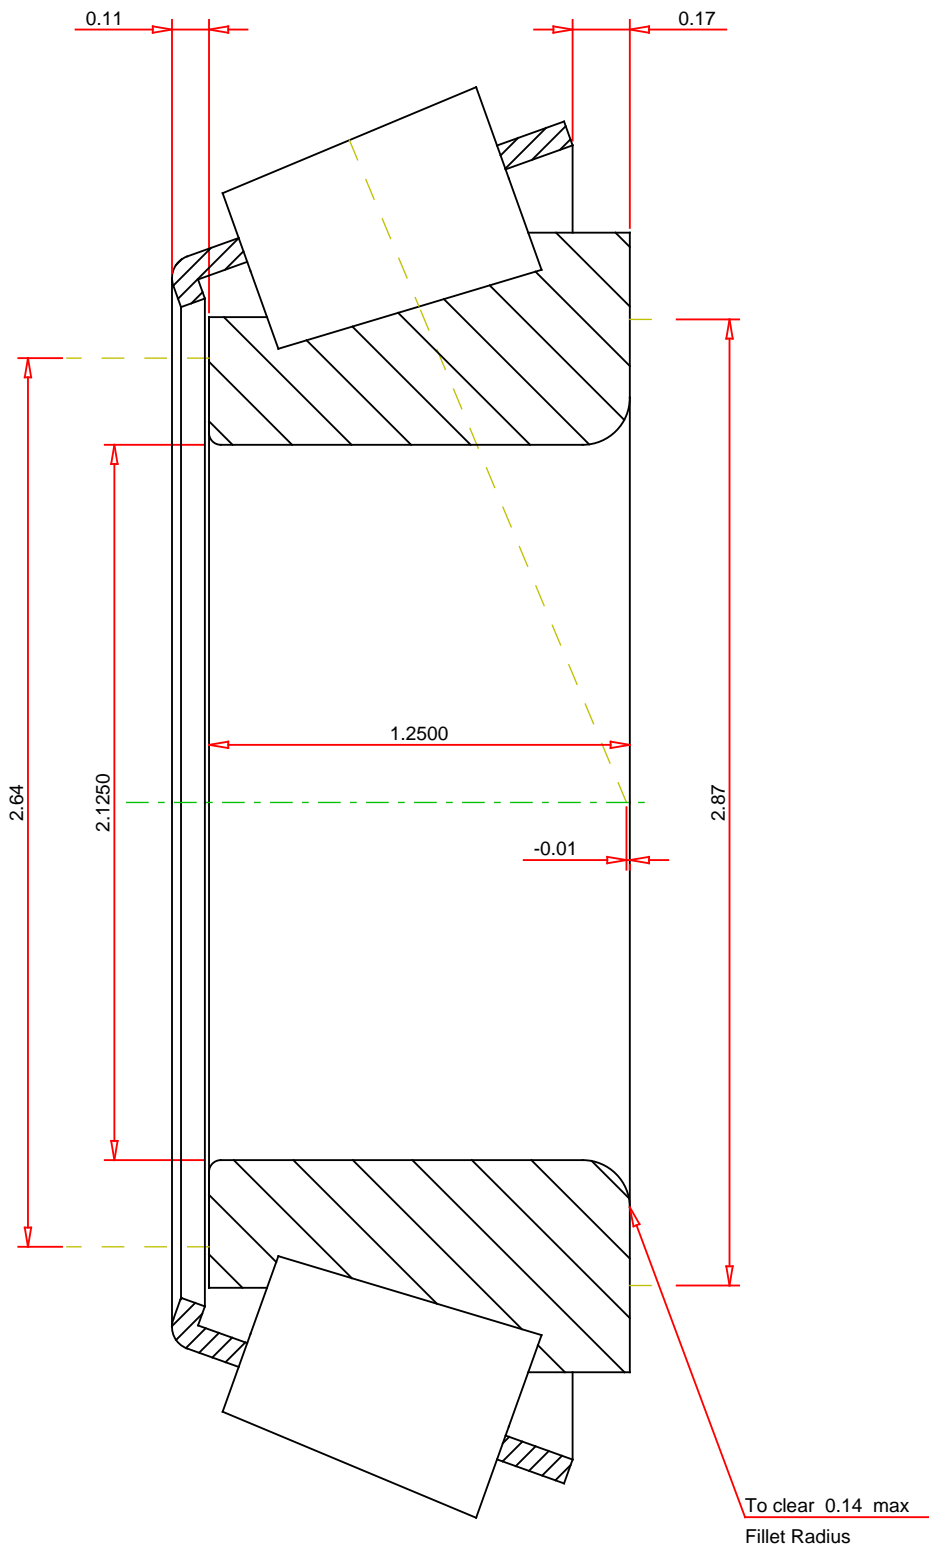

## IMPERIAL UNITS

<div>Number of Rollers Per Row16</div>	<div><div>TIMKEN®</div><div>THE TIMKEN COMPANY</div><div>NORTH CANTON, OHIO USA</div></div>	<div><div>66212</div><div>Tapered Roller Bearings - Single Cones - Imperial</div></div> <div><div><div>K Factor</div><div>Dynamic Radial Rating - C90</div><div>Dynamic Thrust Rating - Ca90</div><div>Dynamic Radial Rating - C1</div></div><div><div>0.93</div><div>10300 lbf</div><div>11000 lbf</div><div>39700 lbf</div></div></div>
--	---	---

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY