
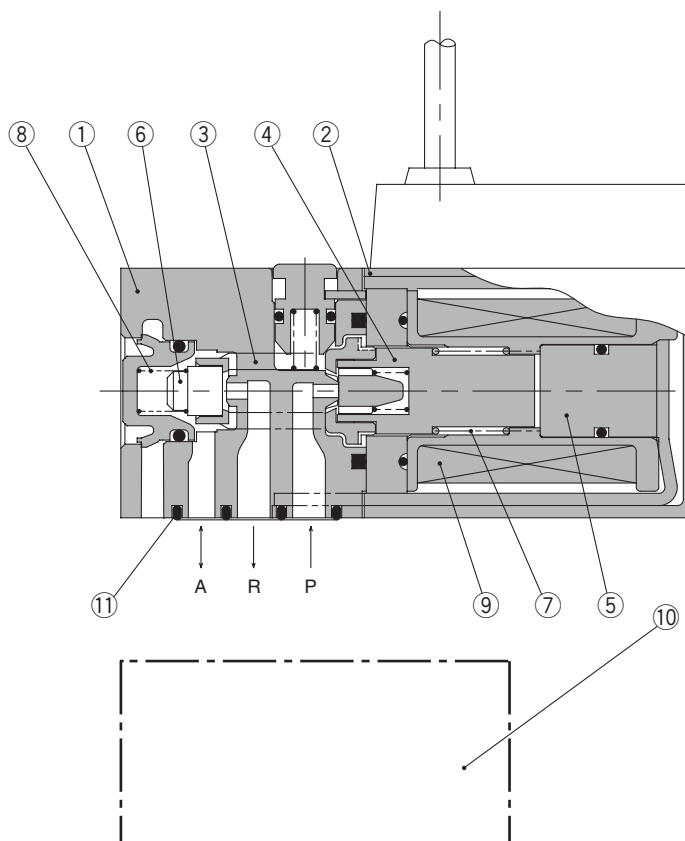


Construction

SY114, SY114A



Component Parts

No.	Description	Material	Note
①	Body	Resin	Gray
②	Cover	Resin	Gray
③	Push rod	Resin	—
④	Movable iron core assembly	HNBR/Stainless steel	—
⑤	Fixed iron core	Stainless steel	—
⑥	Exhaust poppet	HNBR	—
⑦	Return spring	Stainless steel	—
⑧	Poppet spring	Stainless steel	—
⑨	Coil assembly	—	—

Replacement Parts

No.	Description	Part no.	Material
⑩	Sub-plate	SY100-74-1	Zinc die-casted
⑪	Gasket	VJ100-6-8	HNBR

How to Order Connector Assembly

For DC: **SY100-30-4A**

For 100 VAC: **SY100-30-1A**

For 200 VAC: **SY100-30-2A**

For other voltages of AC: **SY100-30-3A**

Without lead wire: **SY100-30-A**
(With connector and
2 pcs. of socket)

Lead wire length

Nil	300 mm
6	600 mm
10	1000 mm
15	1500 mm
20	2000 mm
25	2500 mm
30	3000 mm
50	5000 mm

V100

SY

SYJ

VK

VZ

VT

VP

VG

VP

S070

VQ

VKF

VQZ

VZ

VS

VFN