




Technical data

32320U

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

Visual(s)

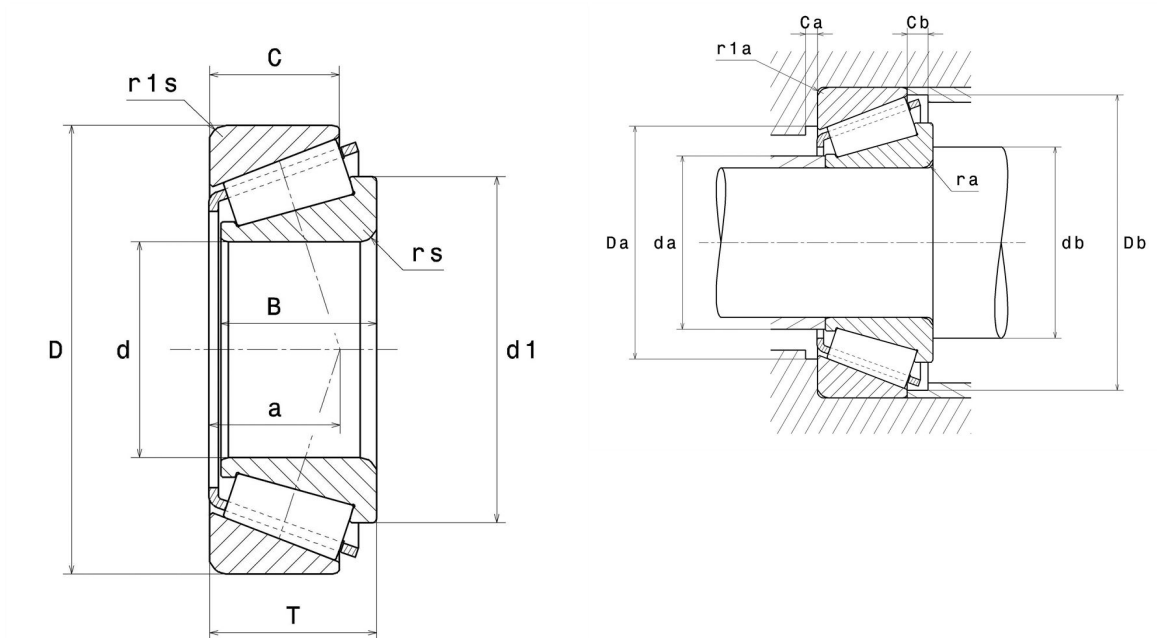

Product definition

d	100 mm
D	215 mm
B	73 mm
C	60 mm
T	77.5 mm
d1	155 mm
a	53 mm
rs min	4 mm
r1s min	3 mm
e	0.35
Y2	1.74
Y0	0.96
Mass	12.7 kg
ISO 355 reference	T2GD100
Brand	NTN

Product performance

Dynamic load, C	570 kN
Rating life coefficient, A2	1
Static load, C0	770 kN
Fatigue limit load, Cu	81.9 kN
Nlim (oil)	2,400 Tr/min
Nlim (grease)	1,800 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.27 Hz
Characteristic outer ring frequency, BPF0	6.16 Hz
Characteristic inner ring frequency, BPFI	8.84 Hz

Abutment dimensions

da max	121 mm
db min	118 mm
Da min	177 mm
Da max	201 mm
Db min	200 mm
Ca min	5 mm
Cb min	17.5 mm
ra max	3 mm
r1a max	2.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y ₂

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.5	Y ₀

If $P_0 < F_r$, then use $P_0 = F_r$

The values for e, Y₂ and Y₀ are shown in the above table