



Optional Accessories

12AAF712:	Battery pack
12AAA797	Thermal printer (120V)
12AAA802	Thermal printing paper (10pcs.)
12AAA804	Cable for page printer** (2m)
12AAA807	RS-232C cable (80" / 2m)
12AAA808	RS-232C cable (160" / 4m)

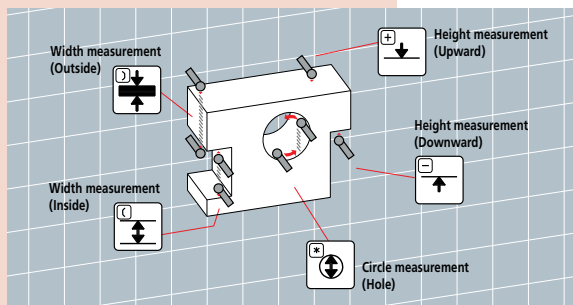


Optional probes and calibration blocks

12AAF666
ø1 ball probe




957261
ø2 ball probe




12AAF667
ø2 ruby ball probe




957262
ø3 ball probe




957263
ø4 ball probe




12AAB552
ø10 ball probe, L=55



12AAF668
ø10 ball probe, L=82



12AAF669
ø10 ball probe, L=120




932361 Mu-checker lever head holder
CMM ball and disk hard probes are available.


12AAA787 Block for calibrating probe diameter
(applicable to taper probe)

K650986 Styli Kit M3


12AAF670
ø5 disk probe




12AAF671
ø10 disk probe




957264
ø14 disk probe




957265
ø20 disk probe




12AAF672
ø1 ball offset probe*
*test indicator stylus (103017)




12AAF673
ø2 ball offset probe




12AAA788
ø4 ball offset probe




12AAA789
ø6 ball offset probe




226117
M2 CMM stylus adapter




226118
M3 CMM stylus adapter



12AAC072 Depth probe




12AAC073 ø20 taper probe




12AAA792 Dial indicator (ø8 stem) holder


12AAA837 Dial indicator (ø3/8" stem) holder




12AAA793 Probe extension holder (85mm/3.3")



12AAB136 ø10 cylindrical probe



DIMENSIONS AND MASS

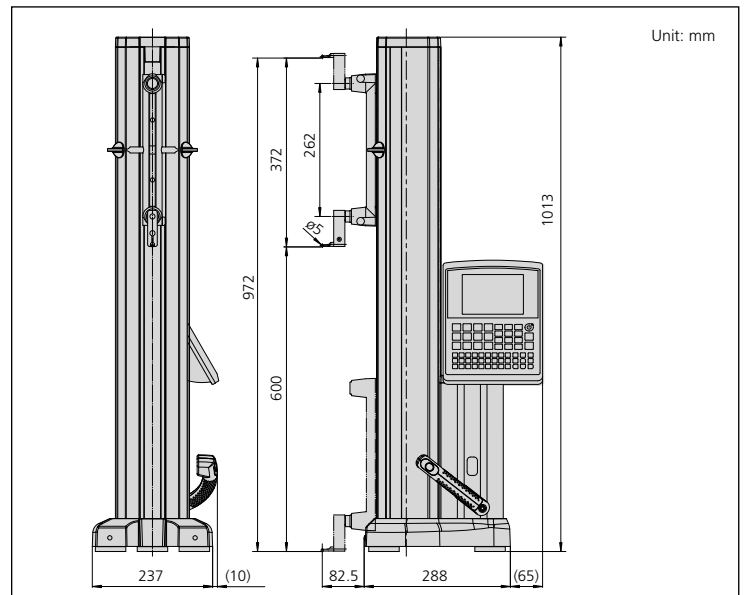


Optional Accessories


12AAC072:	Depth probe
12AAA792:	Dial indicator (ø8mm stem) holder
12AAA837:	Dial indicator (ø3/8" stem) holder
12AAA793:	Probe extension holder (3.3" / 85mm)
12AAF667:	ø2mm ruby ball probe
957261:	ø2mm ball probe
957262:	ø3mm ball probe
957263:	ø4mm ball probe
05HAA394:	ø5mm ball probe (for 05HZA148)
12AAB552:	ø10 mm ball probe, L=55mm
12AAF670:	ø5mm ball probe
12AAF671:	ø10mm ball probe
957264:	ø14mm disk probe
957265:	ø20mm disk probe
12AAA788:	ø4mm ball offset probe
05HAA394:	ø5mm ball offset probe
12AAA789:	ø6mm ball offset probe
05HZA173:	Scriber
264-504-5A:	DP-1VR
936937:	SPC cable (40" / 1m)
965014:	SPC cable (80" / 2m)

Circle pitch measurement

The length A, B, C and D can be determined by measuring circles 1 to 3 once each, using the memory of measuring data together with the calculation function. (A maximum of nine circle measurements can be saved.)




Maximum/minimum and displacement measurement

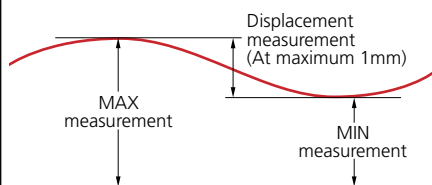

Inside diameter measurement


DIMENSIONS

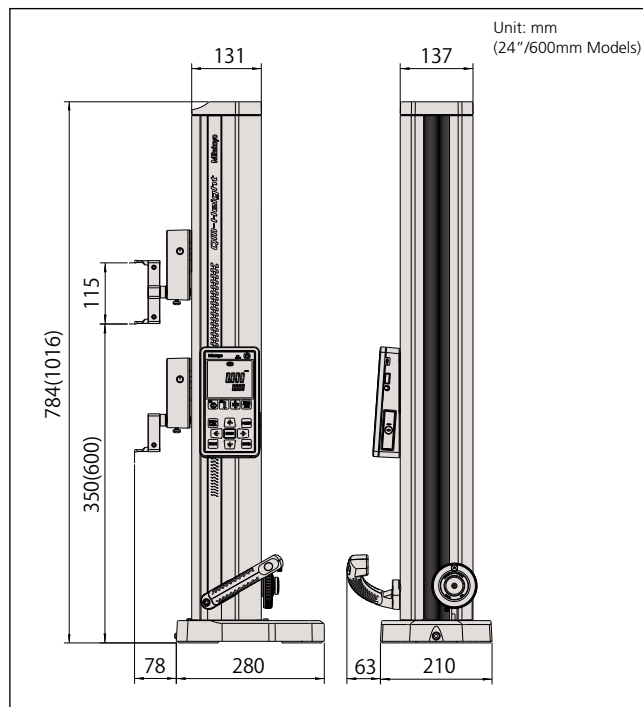

Digimatic mini processor DP-1VR



936937 (1m)
965014 (2m)

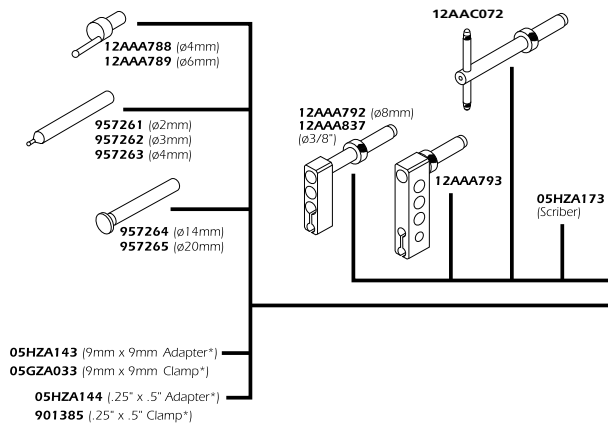

* Possible to use the scriber for Height Gage.

