

## OTHER TOOLS AND ACCESSORIES

## Blow gun



- Model with air screen to prevent dust return to the operator.
- Supplied with angled nozzle V.999A10.
- Power supply: threading 1/4".
- Hose diameter: 8 mm.
- Consumption: 0.53 m<sup>3</sup>/min.
- Jet pressure: 2 bar.
- Angled nozzle 100 mm: V.999A10.
- Angled nozzle 200 mm: V.999A20.
- Straight nozzle 300 mm: V.999A30.



	H [mm]	L [mm]	L1 [mm]	ΔΔ [g]
V.999A	27	150	42	170

## Air hose reel



- Length 15 m.
- Withstands up to 15 bar.
- Suited to high air consumption tools.
- Internal diameter 10 mm.
- Metallic return spring.
- Polyurethane hose.
- 3/8" NPT outlet.



	ΔΔ [kg]
N.709	7.8

## NETWORK CONNECTION

## Filter-regulator-lubricator BSP Gas



- 2-piece set.
- Lubricator regulator filter with wall fastener and pressure gauge.



	A ["]	d [mm]	H [mm]	L [mm]	P [mm]	ΔΔ [g]
N.580	1/4	40	172	92	86	485
N.581	3/8	40	218	123	102	880
N.582	1/2	40	275	156	118	1830

## Set of 4 hose connections




- To connect elements with different pitches.
- Comprising:
  - 1 part threading 1/4" x 3/8".
  - 1 part threading 3/8" x 3/8".
  - 1 part threading 3/8" x 1/2".
  - 1 part threading 1/2" x 1/2".



	ΔΔ [g]
N.600	130

## Polyurethane spiral extension

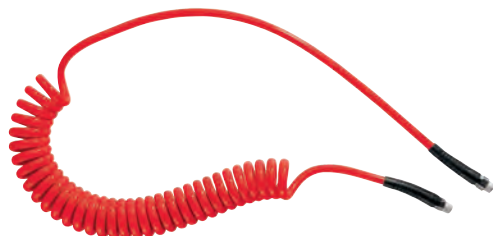

- Max length: 8 m.
- Hose diameter: 8 x 12 mm.
- Rotary fitting tool side: 3/8" gas.
- Fixed fitting supply side: 3/8" gas.
- Female adapter bit 6 mm tapered 3/8" gas.



	ΔΔ [g]
N.644	980