

## T Union tee


### EO 24° cone end

#### profile body steel and brass (S3)

Series LL4–10 mm D1

Series L 6+ 8 mm D1

Series S 6 mm D1

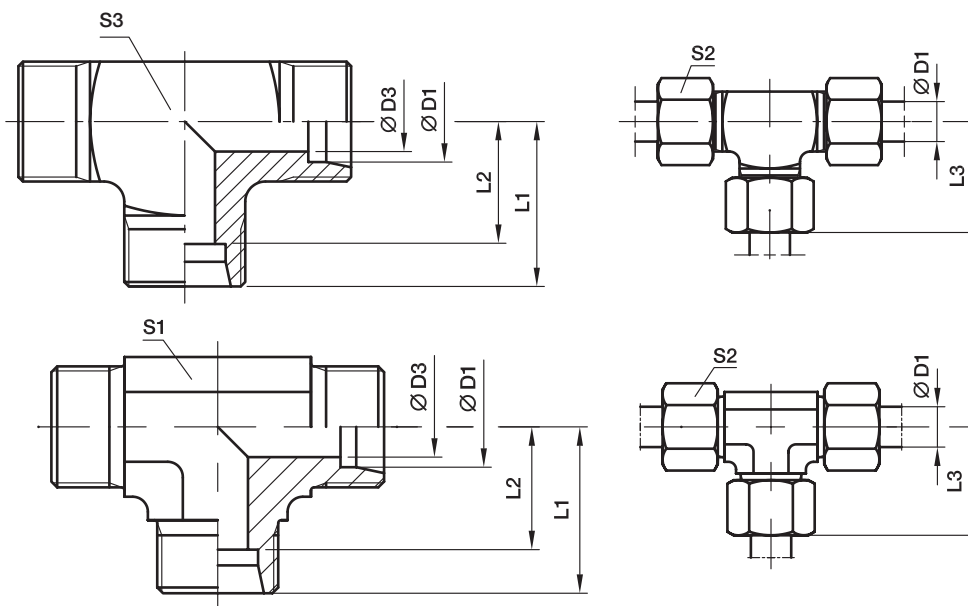

| Series           | D1<br> | D3   | L1 | L2   | L3 | S1 | S2 | S3 | Weight<br>g/1 piece | Order code*  | PN (bar) <sup>1)</sup> |     |     |     |
|------------------|--------|------|----|------|----|----|----|----|---------------------|--------------|------------------------|-----|-----|-----|
|                  |        |      |    |      |    |    |    |    |                     |              | CF                     | A3C | 71  | MS  |
| LL <sup>2)</sup> | 04     | 3.0  | 15 | 11.0 | 21 | 9  | 10 | 9  | 19                  | <b>T04LL</b> | 100                    | 100 | 100 | 63  |
|                  | 06     | 4.5  | 15 | 9.5  | 21 | 9  | 12 | 11 | 20                  | <b>T06LL</b> | 100                    | 100 | 100 | 63  |
|                  | 08     | 6.0  | 17 | 11.5 | 23 | 12 | 14 | 12 | 27                  | <b>T08LL</b> | 100                    | 100 | 100 | 63  |
|                  | 10     | 8.0  | 18 | 12.5 | 24 | 12 | 17 | 14 | 39                  | <b>T10LL</b> | 100                    | 100 | 100 | 63  |
|                  | 12     | 10.0 | 21 | 15.0 | 27 | 14 | 19 |    | 45                  | <b>T12LL</b> | 100                    | 100 | 100 | 63  |
| L <sup>3)</sup>  | 06     | 4.0  | 19 | 12.0 | 27 | 12 | 14 | 12 | 37                  | <b>T06L</b>  | 500                    | 315 | 315 | 200 |
|                  | 08     | 6.0  | 21 | 14.0 | 29 | 12 | 17 | 14 | 53                  | <b>T08L</b>  | 500                    | 315 | 315 | 200 |
|                  | 10     | 8.0  | 22 | 15.0 | 30 | 14 | 19 |    | 48                  | <b>T10L</b>  | 500                    | 315 | 315 | 200 |
|                  | 12     | 10.0 | 24 | 17.0 | 32 | 17 | 22 |    | 65                  | <b>T12L</b>  | 400                    | 315 | 315 | 200 |
|                  | 15     | 12.0 | 28 | 21.0 | 36 | 19 | 27 |    | 106                 | <b>T15L</b>  | 400                    | 315 | 315 | 200 |
|                  | 18     | 15.0 | 31 | 23.5 | 40 | 24 | 32 |    | 179                 | <b>T18L</b>  | 400                    | 315 | 315 | 200 |
|                  | 22     | 19.0 | 35 | 27.5 | 44 | 27 | 36 |    | 225                 | <b>T22L</b>  | 250                    | 160 | 160 | 100 |
|                  | 28     | 24.0 | 38 | 30.5 | 47 | 36 | 41 |    | 396                 | <b>T28L</b>  | 250                    | 160 | 160 | 100 |
|                  | 35     | 30.0 | 45 | 34.5 | 56 | 41 | 50 |    | 567                 | <b>T35L</b>  | 250                    | 160 | 160 | 100 |
|                  | 42     | 36.0 | 51 | 40.0 | 63 | 50 | 60 |    | 905                 | <b>T42L</b>  | 250                    | 160 | 160 | 100 |
|                  | 06     | 4.0  | 23 | 16.0 | 31 | 12 | 17 | 14 | 68                  | <b>T06S</b>  | 800                    | 630 | 630 | 400 |
|                  | 08     | 5.0  | 24 | 17.0 | 32 | 14 | 19 |    | 70                  | <b>T08S</b>  | 800                    | 630 | 630 | 400 |
| S <sup>4)</sup>  | 10     | 7.0  | 25 | 17.5 | 34 | 17 | 22 |    | 91                  | <b>T10S</b>  | 800                    | 630 | 630 | 400 |
|                  | 12     | 8.0  | 29 | 21.5 | 38 | 17 | 24 |    | 117                 | <b>T12S</b>  | 630                    | 630 | 630 | 400 |
|                  | 14     | 10.0 | 30 | 22.0 | 40 | 19 | 27 |    | 136                 | <b>T14S</b>  | 630                    | 630 | 630 | 400 |
|                  | 16     | 12.0 | 33 | 24.5 | 43 | 24 | 30 |    | 202                 | <b>T16S</b>  | 630                    | 400 | 400 | 250 |
|                  | 20     | 16.0 | 37 | 26.5 | 48 | 27 | 36 |    | 289                 | <b>T20S</b>  | 420                    | 400 | 400 | 250 |
|                  | 25     | 20.0 | 42 | 30.0 | 54 | 36 | 46 |    | 545                 | <b>T25S</b>  | 420                    | 400 | 400 | 250 |
|                  | 30     | 25.0 | 49 | 35.5 | 62 | 41 | 50 |    | 758                 | <b>T30S</b>  | 420                    | 400 | 400 | 250 |
|                  | 38     | 32.0 | 57 | 41.0 | 72 | 50 | 60 |    | 1264                | <b>T38S</b>  | 420                    | 315 | 315 | 200 |

<sup>1)</sup> Pressure shown = item deliverable

<sup>2)</sup> LL = very light series; <sup>3)</sup> L = light series; <sup>4)</sup> S = heavy series

$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$

Delivery without nut and ring. Information on ordering complete fittings see page 17.

\*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes                           |                             |          |
|-----------------------------------------------|-----------------------------|----------|
| Material                                      | Suffix surface and material | Example  |
| Steel, zinc plated, chrome <sup>6</sup> -free | CFX                         | T16SCFX  |
| Steel, zinc yellow plated                     | A3CX                        | T16SA3CX |
| Stainless Steel                               | 71X                         | T16S71X  |
| Brass                                         | MSX                         | T16SMSX  |