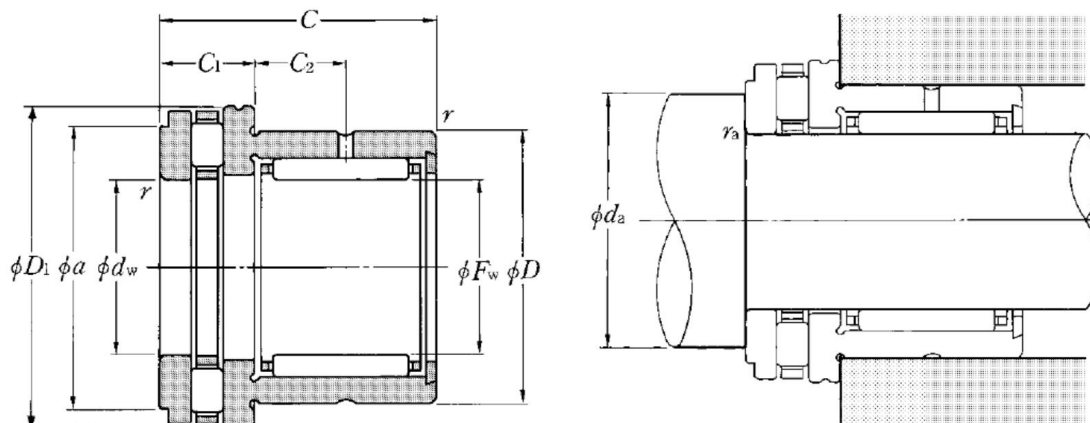

**Visual(s)**

**Product definition**

|                                       |         |
|---------------------------------------|---------|
| <b>Fw</b>                             | 20 mm   |
| <b>dw</b>                             | 20 mm   |
| <b>D</b>                              | 30 mm   |
| <b>D1</b>                             | 35 mm   |
| <b>C</b>                              | 30 mm   |
| <b>C1</b>                             | 10 mm   |
| <b>C2</b>                             | 10.5 mm |
| <b>a</b>                              | 30.7 mm |
| <b>rs min</b>                         | 0.3 mm  |
| <b>Dw</b>                             | 2 mm    |
| <b>Dw1</b>                            | 4.5 mm  |
| <b>Lw</b>                             | 15.8 mm |
| <b>Lubrication hole on outer ring</b> | Oui/Yes |
| <b>k</b>                              | 2.5 mm  |
| <b>Precision class</b>                | P0      |
| <b>Mass</b>                           | 0.09 kg |
| <b>Brand</b>                          | NTN     |

## Product performance

|                                        |           |
|----------------------------------------|-----------|
| <b>Cr</b>                              | 16.4 kN   |
| <b>Ca</b>                              | 20.2 kN   |
| <b>C0r</b>                             | 27.1 kN   |
| <b>C0a</b>                             | 46.5 kN   |
| <b>Nlim (grease)</b>                   | 2,100 rpm |
| <b>Nlim (oil)</b>                      | 8,500 rpm |
| <b>Min operating temperature, Tmin</b> | -20 °C    |
| <b>Max operating temperature, Tmax</b> | 120 °C    |

## Abutment dimensions

|                |        |
|----------------|--------|
| <b>da min</b>  | 32 mm  |
| <b>ras max</b> | 0.3 mm |