


Technical data

NKXR20T2Z

Combined bearings

Visual(s)

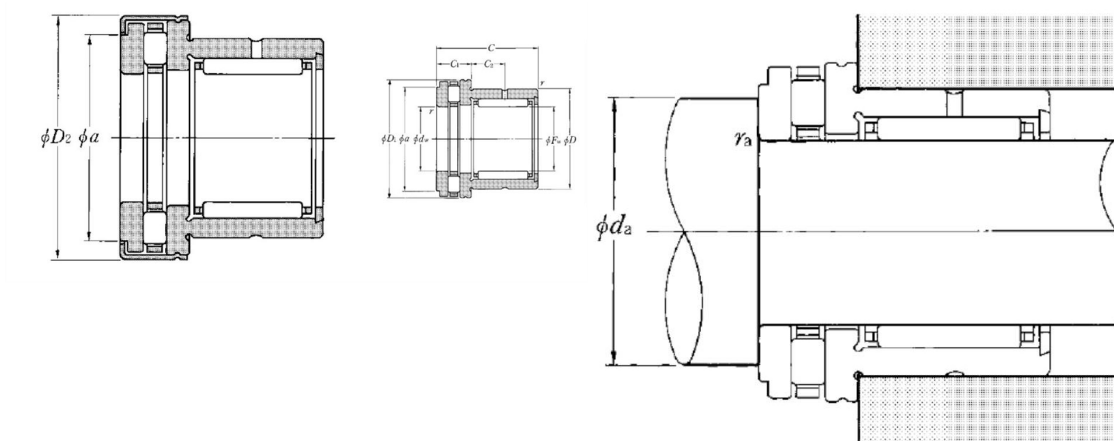

Product definition

Fw	20 mm
dw	20 mm
D	30 mm
D2	36 mm
C	30 mm
C1	10 mm
C2	10.5 mm
a	30.7 mm
rs min	0.3 mm
Dw	2 mm
Dw1	4.5 mm
Lw	15.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Precision class	P0
Mass	0.1 kg
Brand	NTN

Product performance

Cr	16.4 kN
Ca	20.2 kN
C0r	27.1 kN
C0a	46.5 kN
Nlim (grease)	2,100 Tr/min
Nlim (oil)	8,500 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	32 mm
ras max	0.3 mm