



The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Bearing Unit - Adapter Sleeve UKF217 - H2317, UKF 200 Four-Bolt Flanged Mounted Bearings - Adapter Sleeve Locking

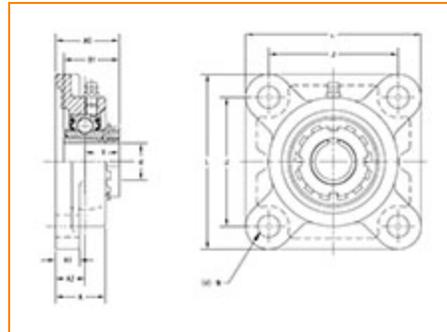

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bearing Unit - Adapter Sleeve	UK217 - H2317
Shaft Size d	75 mm
Adapter Sleeve Number¹	H2317
Locking Style	Adapter Sleeve Locking
Housing Construction	Four-Bolt Square Flange

Dimensions

Total Length L	220 mm 8.661 in
Housing Width A	63 mm 2.48 in




Bolt Hole Spacing J	175 mm 6.89 in
Bolt Hole Size N	23 mm 0.906 in
Flange Thickness A1	24 mm 0.945 in
Center of Bearing from Housing End A2	36 mm 1.417 in
Center of Bearing from Bearing End Y	46.5 mm 1.831 in
Dimension B1	82 mm 3.228 in
Dimension A0	82.5 mm 3.25 in
Grease Nipple Size	A-R1/8

Basic Load Ratings

Static Load Rating	61900 N 13916 lbf
Dynamic Load Rating	84000 N 18884 lbf

¹ Purchase the Adapter Sleeve separately

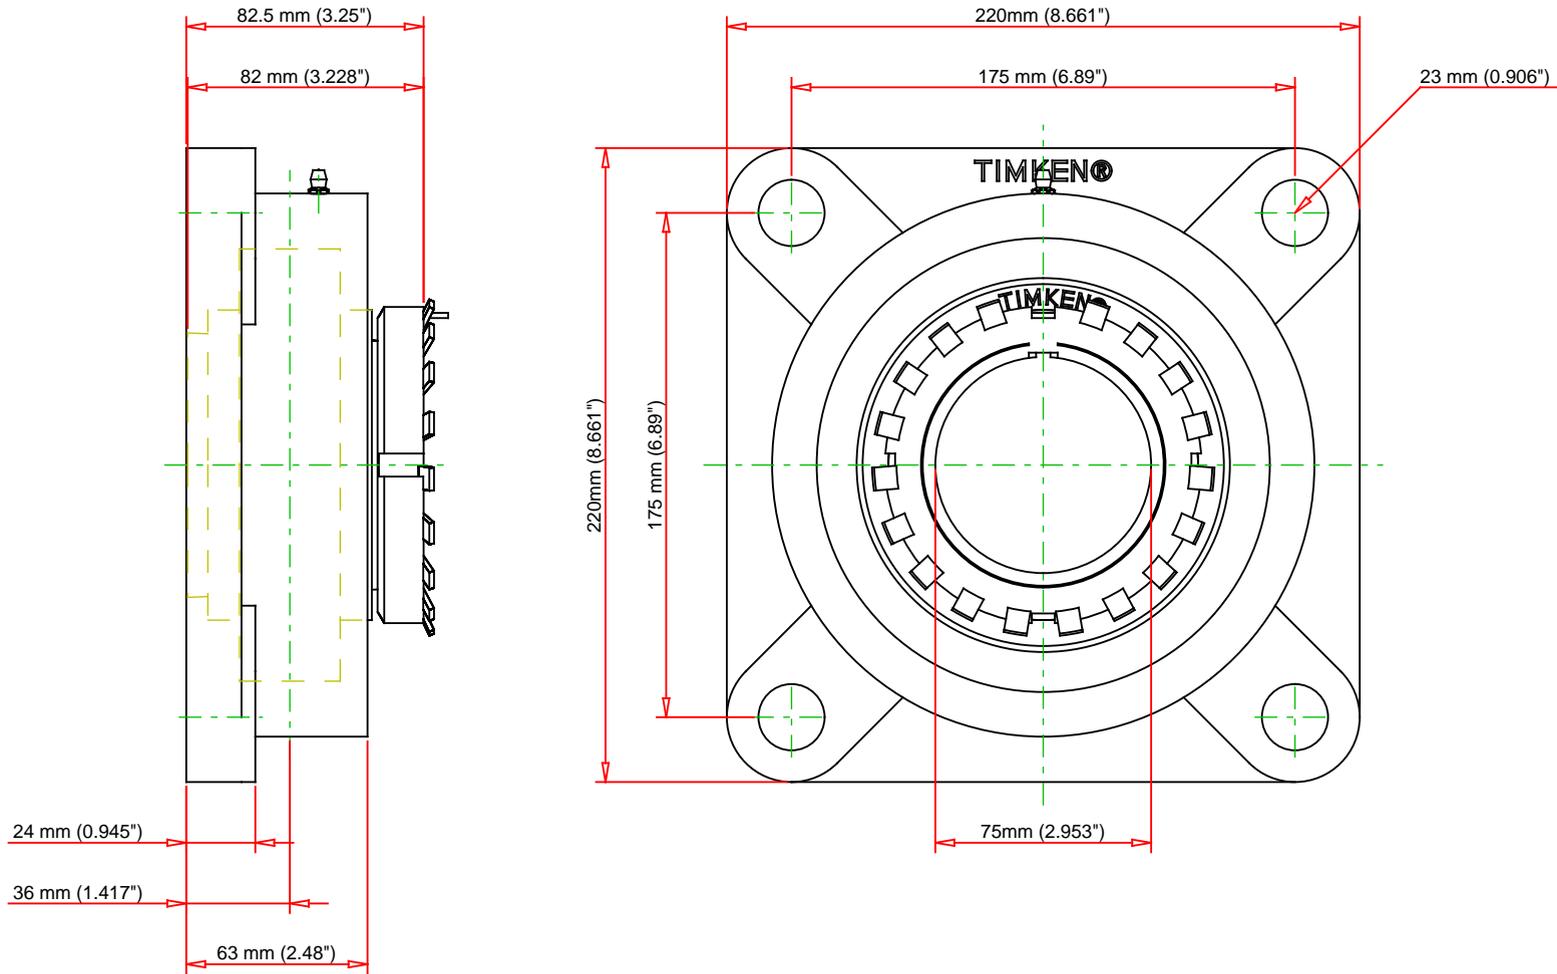

Note: Adapter sold separately

Bearing Number	UK217 - H2317			
Load Ratings - C_r	18884	lbf	84000	N
Load Ratings - C_{Or}	13916	lbf	61900	N
Weight	19.8	lb	9	kg

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

UKF217 - H2317
UKF 200 Four-Bolt Flanged Mounted
Bearings - Adapter Sleeve Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY