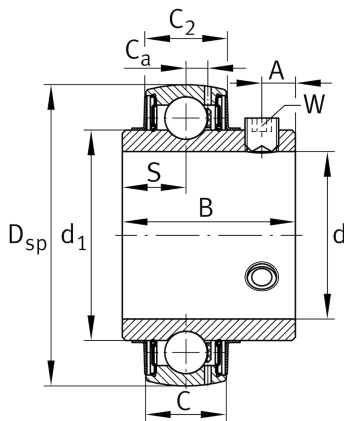


**FAG****UC212** **Radial insert ball bearing**

Radial insert ball bearings UC, spherical outer ring, location by grub screws, RSR seals on both sides

Technical information**Main Dimensions & Performance Data**

d	60 mm	Bore diameter
D _{SP}	110 mm	Outside diameter
B	65.1 mm	Width
C _{ur}	1,530 N	Fatigue load limit, radial
C _r	56,000 N	Basic dynamic load rating, radial
C _{0r}	36,000 N	Basic static load rating, radial
≈m	1.545 kg	Weight

Dimensions

C	27 mm	Width, outer ring
C ₂	27.6 mm	Sealing total width
S	25.4 mm	Distance raceway
d ₁	76.48 mm	Rib diameter inner ring
C _a	7.4 mm	Distance to lubrication hole
A	10 mm	Distance thread
W	5 mm	Width of flats

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.

Calculation factors

f ₀	14.3	Calculation factor
----------------	------	--------------------