


**The Timken Company**

4500 Mt Pleasant St. NW


N. Canton, OH 44720

**Phone:** (234) 262-3000

**E-Mail:** [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • **Web site:** [www.timken.com](http://www.timken.com)

## Part Number 45290, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

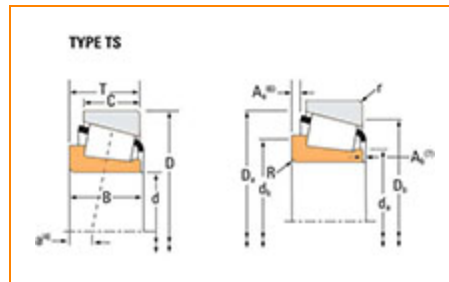

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

### Specifications

<b>Series</b>	45200
<b>Cone Part Number</b>	45290
<b>Design Units</b>	Imperial
<b>Cage Type</b>	Stamped Steel
<b>C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)<sup>1</sup></b>	267000 N
<b>C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)<sup>2</sup></b>	69200 N



Dimensions

<b>d - Cone Bore</b>	57.15 mm
<b>B - Cone Width</b>	30.958 mm

## Abutment and Fillet Dimensions

<b>R - Cone Backface "To Clear" Radius<sup>3</sup></b>	2.3 mm
<b>da - Cone Frontface Backing Diameter</b>	66 mm
<b>db - Cone Backface Backing Diameter</b>	70 mm
<b>Ab - Cage-Cone Frontface Clearance</b>	2.5 mm
<b>Aa - Cage-Cone Backface Clearance</b>	1.8 mm
<b>a - Effective Center Location<sup>4</sup></b>	-8.1 mm

## Basic Load Ratings

<b>C90 - Dynamic Radial Rating (90 million revolutions)<sup>5</sup></b>	39700 N
<b>C1 - Dynamic Radial Rating (1 million revolutions)<sup>6</sup></b>	153000 N
<b>C0 - Static Radial Rating</b>	189000 N
<b>C<sub>a90</sub> - Dynamic Thrust Rating (90 million revolutions)<sup>7</sup></b>	22600 N

## Factors

<b>K - Factor<sup>8</sup></b>	1.76
<b>G1 - Heat Generation Factor (Roller-Raceway)</b>	63.5
<b>G2 - Heat Generation Factor (Rib-Roller End)</b>	16.9
<b>Cg - Geometry Factor<sup>9</sup></b>	0.0971

<sup>1</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>2</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>3</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>4</sup> Negative value indicates effective center inside cone backface.


<sup>5</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values.

<sup>6</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>7</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>8</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>9</sup> Geometry constant for Lubrication Life Adjustment Factor  $a_3$ .

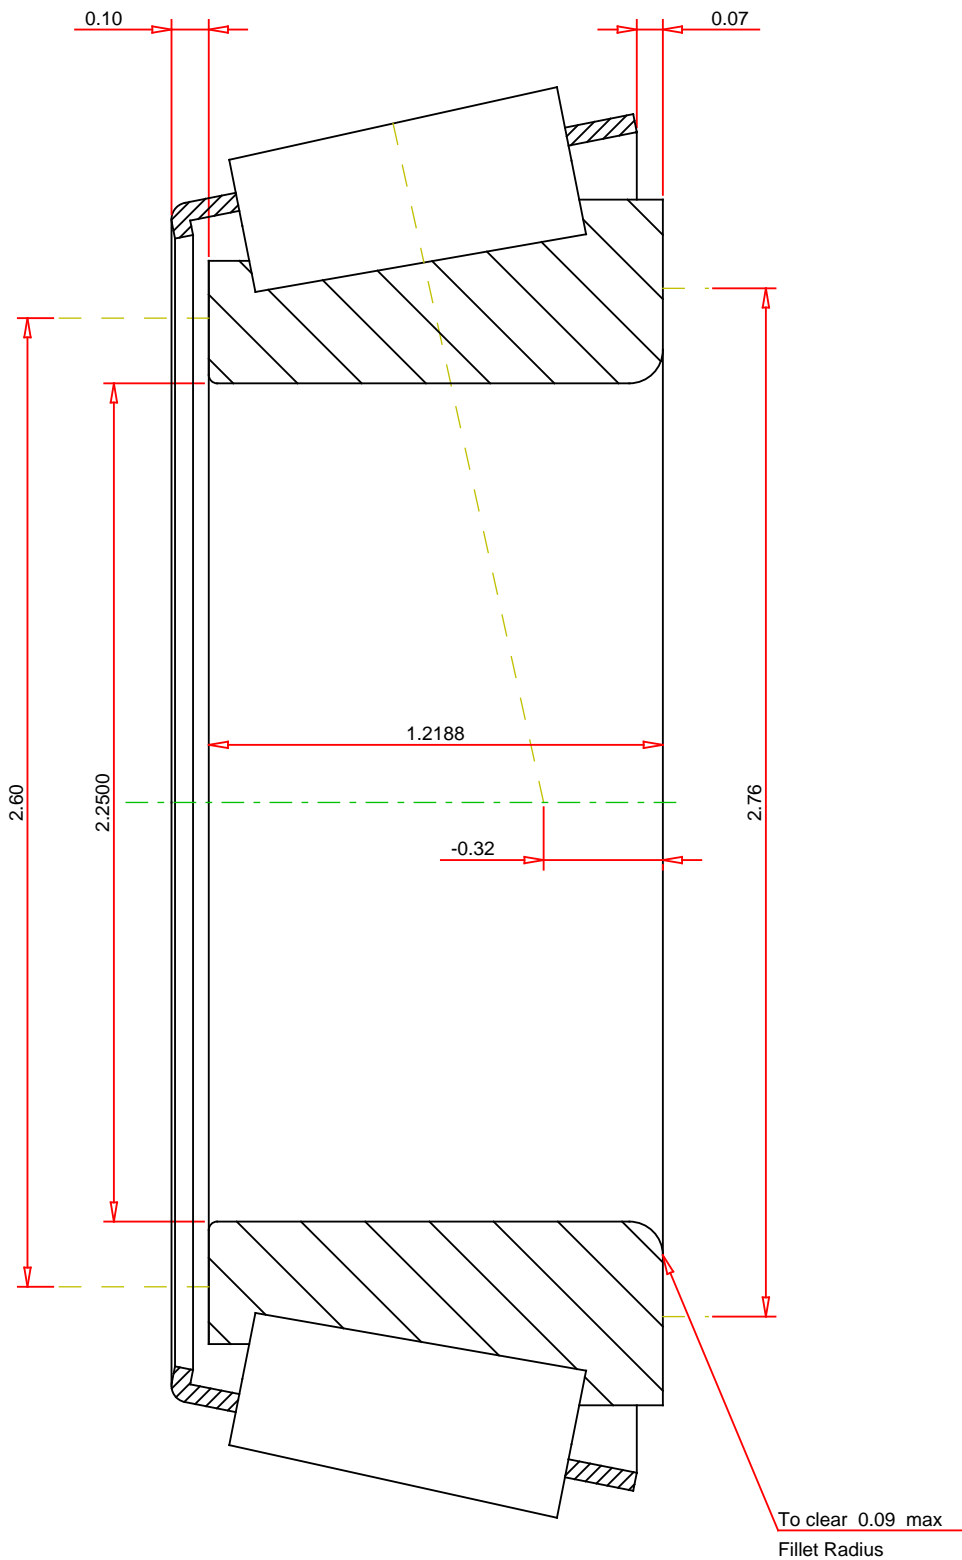

IMPERIAL UNITS

Number of Rollers Per Row18	<div>TIMKEN®</div>	45290 Tapered Roller Bearings - Single Cones - Imperial	
	<div>THE TIMKEN COMPANY NORTH CANTON, OHIO USA</div>	<div>K Factor1.76 Dynamic Radial Rating - C908930 lbf Dynamic Thrust Rating - Ca905090 lbf Dynamic Radial Rating - C134500 lbf</div>	
Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.		FOR DISCUSSION ONLY	