




Technical datasheet

NJ313C4

Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, pressed steel cage.

Visual(s)

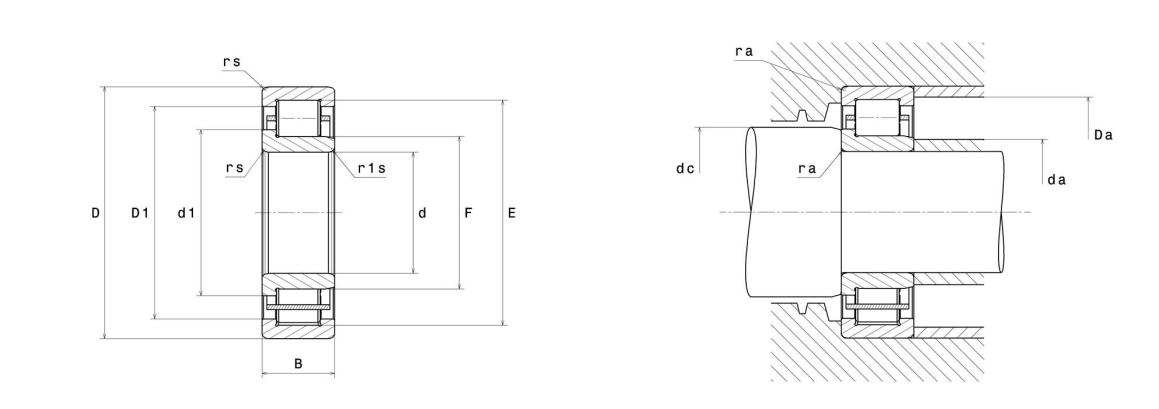

Product definition

d	65 mm
D	140 mm
B	33 mm
E	121.5 mm
F	83.5 mm
d1	91 mm
rs min	2.1 mm
r1s min	2.1 mm
Radial clearance class	C4
Mass (without HJ ring)	2.25 kg
Brand	NTN

Product performance

Dynamic load, C	135 kN
Static load, C0	139 kN
Fatigue limit load, Cu	16.8 kN
Nlim (oil)	6,000 rpm
Nlim (grease)	5,100 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.21 Hz
Characteristic outer ring frequency, BPF0	4.89 Hz
Characteristic inner ring frequency, BPFI	7.11 Hz

Abutment dimensions

da min	76 mm
da max	81 mm
dc min	93 mm
Da max	129 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$