

Silencer


One-touch Fitting Connection Type

Series **AN**□□□-**KM**□□

Can connect with One-touch fitting directly.



JIS Symbol



Specifications

Fluid	Compressed air
Max. operating pressure ^{Note)}	1.0 MPa
Ambient and fluid temperature	5 to 60°C



Note) It indicates the inlet pressure for solenoid valve.




Refer to page 5-10-13 for Precautions on these products.

Model

Model	Applicable One-touch fitting size	Noise reduction (dB (A))	Effective area (mm ²)	Recommended flow (m ³ /min (ANR))	Dimensions (mm)		
					A	B	C
AN103-KM6	ø6 (Series KQ)	25	7	0.8 or less	37	11	15
AN103-X233	ø6 (Series KQ, KJ)						
AN103-X235	ø1/4" (Series KQ, KJ)						
AN203-KM8	ø8 (Series KQ)	30	14	1.0 or less	51	16	26
AN200-KM8	ø8 (Series KQ)		20	3.0 or less	78	22	54
AN200-KM10	ø10 (Series KQ)		26		81	22	54
AN300-KM10	ø10 (Series KQ)		30	5.0 or less	97	25	70
AN300-KM12	ø12 (Series KQ)		41		98	25	70

Construction/Parts/Dimensions

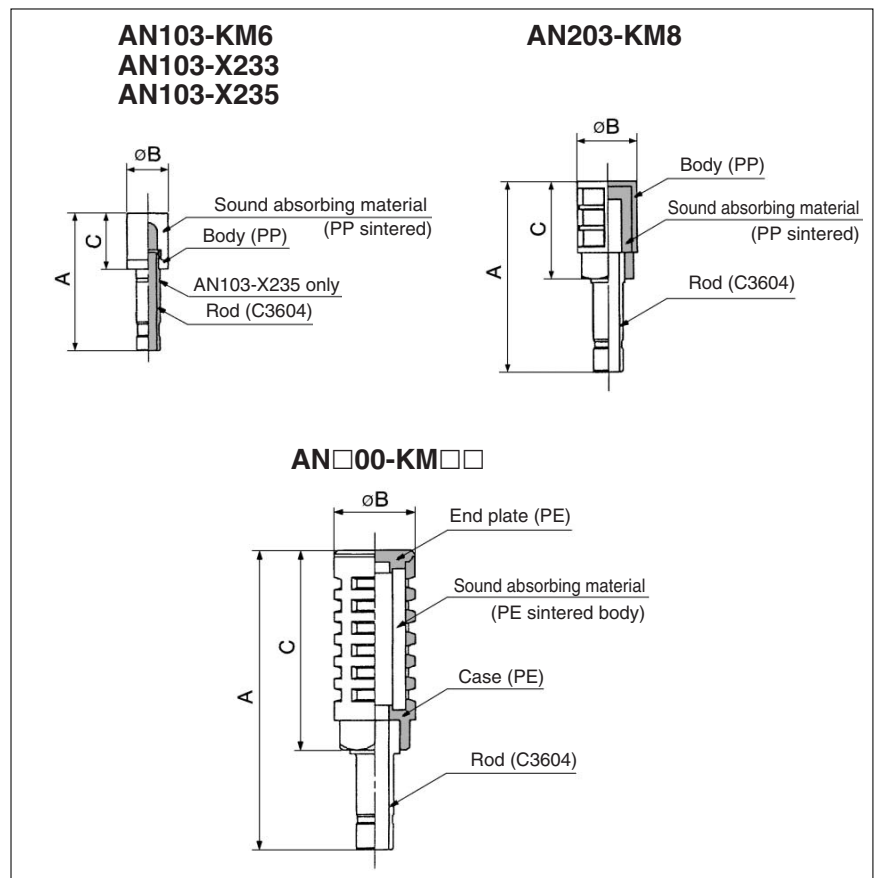

Note 1) About the display of product's material

PP: Polypropylene

PE: Polyethylene

C3604: Copper alloy

Note 2) Recommended flow rate is the flow at 0.5 MPa in the inlet pressure.