


ANSI HEAVY DUTY ROLLER CHAIN

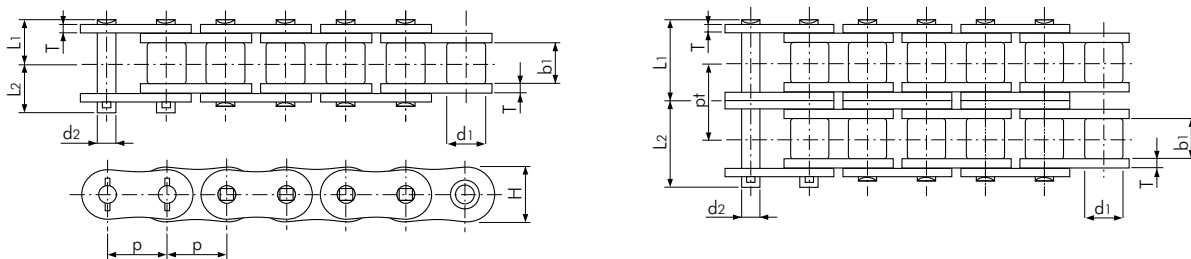

SUPER-H Series

Dimensions in mm

[illegible]

Note:

1. Offset links are not available.
2. Press-fit type connecting links are supplied.
3. Standard ANSI sprockets can be used with single strand chain only.
4. Sprockets with a low teeth number must have hardened teeth.
5. Steel grade of sprockets must be C45 or higher.
6. Multi strand chains need special sprockets, contact Tsubaki for more detailed information.
7. Pins are quad riveted.