


The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number M88048 - M88010, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

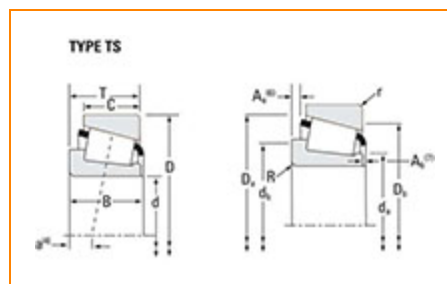


[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	M88000
Cone Part Number	M88048
Cup Part Number	M88010
Design Unit	Inch
Cage Material	Stamped Steel

Dimensions

d - Bore	1 5/16 in 33.338 mm
 - Cup Outer Diameter	2.6875 in 68.263 mm

B - Cone Width	0.875 in 22.225 mm
C - Cup Width	0.6875 in 17.463 mm
T - Bearing Width	0.8750 in 22.225 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	0.03 in 0.800 mm
r - Cup Backface "To Clear" Radius²	0.06 in 1.52 mm
da - Cone Frontface Backing Diameter	1.62 in 41.2 mm
db - Cone Backface Backing Diameter	1.67 in 42.5 mm
Da - Cup Frontface Backing Diameter	2.60 in 66.00 mm
Db - Cup Backface Backing Diameter	2.28 in 57.91 mm
Ab - Cage-Cone Frontface Clearance	0.06 in 1.5 mm
Aa - Cage-Cone Backface Clearance	0.05 in 1.3 mm
a - Effective Center Location³	-0.11 in -2.8 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90	4450 lbf
--	----------

million revolutions)⁴	19800 N
C1 - Dynamic Radial Rating (1 million revolutions)⁵	17100 lbf 76300 N
C0 - Static Radial Rating	17400 lbf 77400 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	4160 lbf 18500 N

Factors

K - Factor⁷	1.07
e - ISO Factor⁸	0.55
Y - ISO Factor⁹	1.1
C_g - Geometry Factor¹⁰	0.0771

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.


⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

¹⁰ Geometry constant for Lubrication Life Adjustment Factor a_3 .

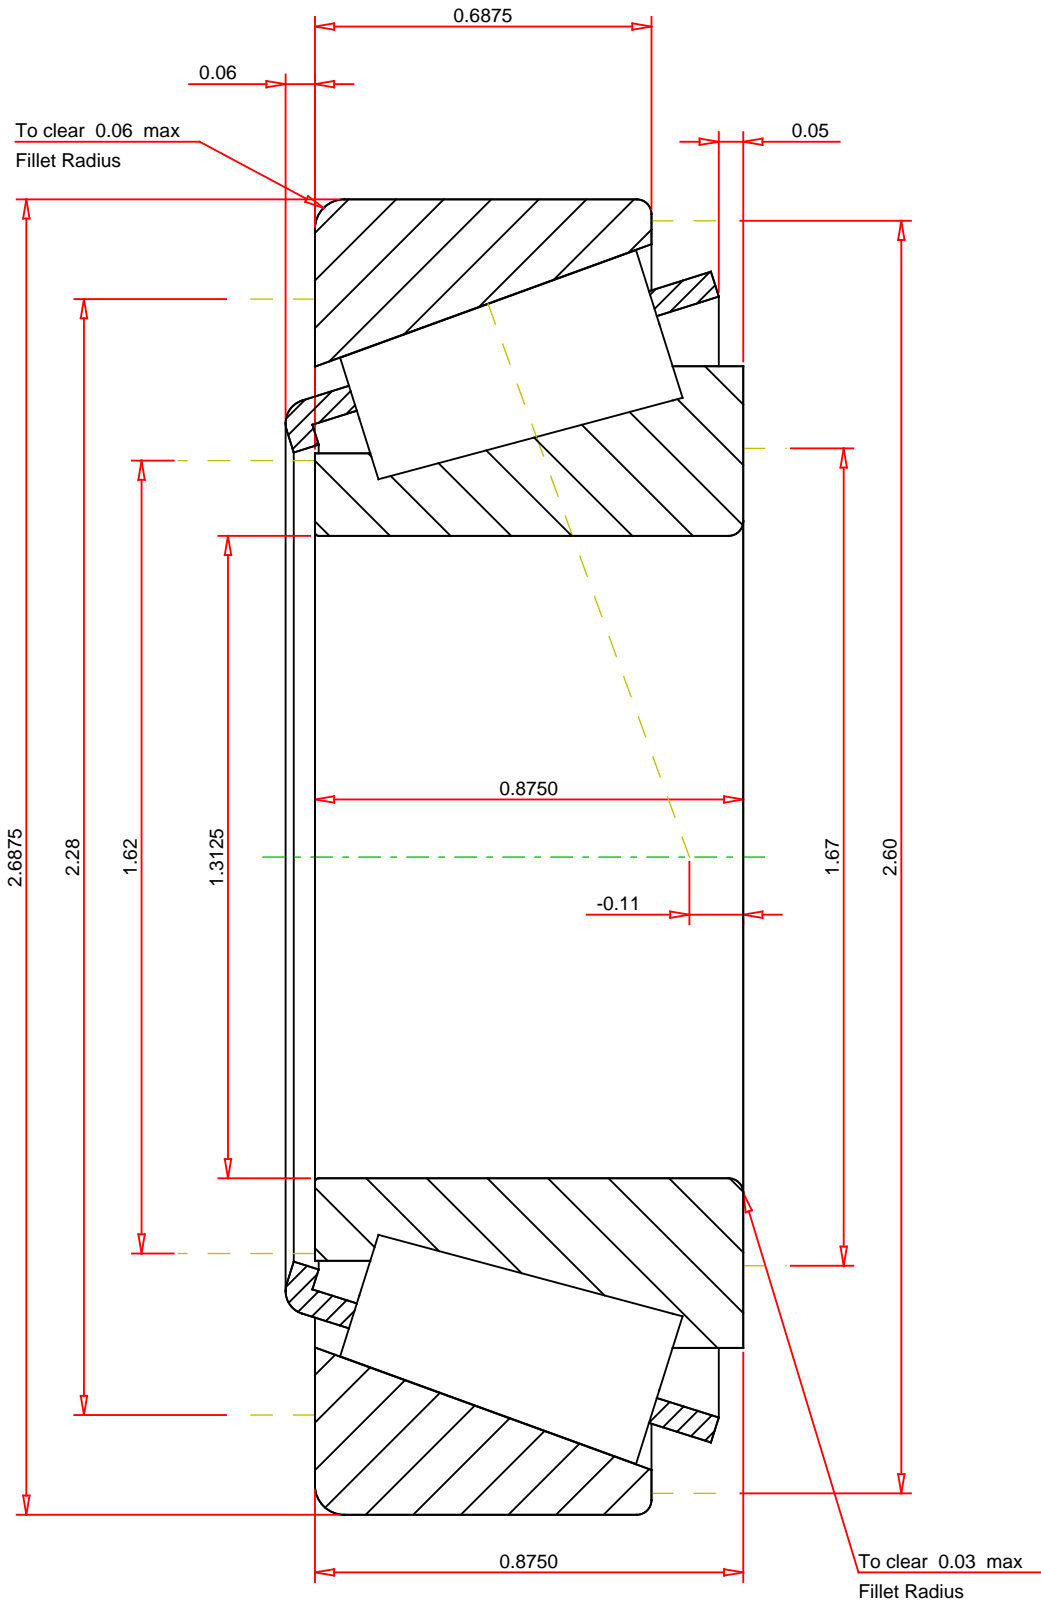

IMPERIAL UNITS

<div>ISO Factor - e0.55</div> <div>ISO Factor - Y1.1</div> <div>Bearing Weight0.8 lb</div> <div>Number of Rollers Per Row18</div> <div>Effective Center Location-0.11 inch</div>		<div>TIMIKEN®</div> <div>THE TIMKEN COMPANY</div> <div>NORTH CANTON, OHIO USA</div>		<div>M88048 - M88010</div> <div>Tapered Roller Bearings - TS (Tapered Single)</div> <div>Imperial</div>	
				<div>K Factor1.07</div> <div>Dynamic Radial Rating - C904450 lbf</div> <div>Dynamic Thrust Rating - Ca904160 lbf</div> <div>Static Radial Rating - C017400 lbf</div> <div>Dynamic Radial Rating - C117100 lbf</div>	