
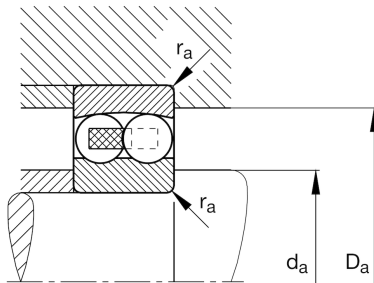


**FAG****2311-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 23...TVH, plastic cage

Technical information

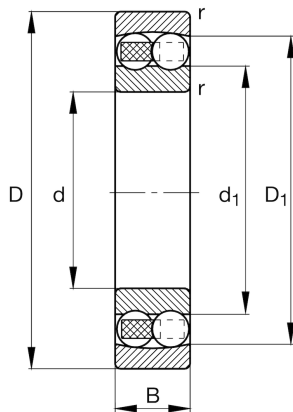

Main Dimensions & Performance Data

d	55 mm	Bore diameter
D	120 mm	Outside diameter
B	43 mm	Width
C _r	77.000 N	Basic dynamic load rating, radial
C _{0r}	24.000 N	Basic static load rating, radial
C _{ur}	1.520 N	Fatigue load limit, radial
n _G	5.700 1/min	Limiting speed
n _{gr}	7.100 1/min	Reference speed
≈m	2,125 kg	Weight

Mounting dimensions

d _{a min}	66 mm	Minimum diameter shaft shoulder
D _{a max}	109 mm	Maximum diameter of housing shoulder
r _{a max}	2 mm	Maximum fillet radius

Dimensions

r _{min}	2 mm	Minimum chamfer dimension
D ₁	100,2 mm	Shoulder diameter outer ring
d ₁	71,68 mm	Shoulder diameter inner ring

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Calculation factors

e	0,42	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y ₁	1,5	Dynamic axial load factor
Y ₂	2,33	Dynamic axial load factor
Y ₀	1,58	Static axial load factor