


Technical datasheet

NKXR25T2Z

Combined bearings

Visual(s)

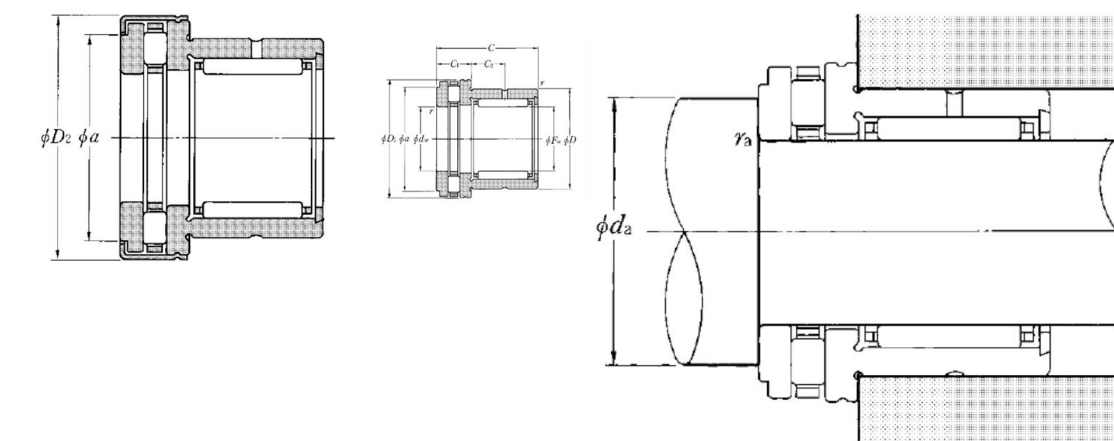

Product definition

Fw	25 mm
dw	25 mm
D	37 mm
D2	43 mm
C	30 mm
C1	11 mm
C2	9.5 mm
a	37.7 mm
rs min	0.6 mm
Dw	2 mm
Dw1	5 mm
Lw	13.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Precision class	P0
Mass	0.14 kg
Brand	NTN

Product performance

Cr	14.2 kN
Ca	27.3 kN
C0r	24 kN
C0a	68 kN
Nlim (grease)	1,800 rpm
Nlim (oil)	7,000 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	39 mm
ras max	0.6 mm