


To achieve the sensing or feedback function, pneumatic sensors can be:

- Limit switches in a variety of sizes and configurations
- Pressure switches with many adjustable ranges
- Components designed specifically for pneumatic technology using pressure variation, air bleed or blocking for detection.

A wide variety of pneumatic sensors are available to suit any application requirement.

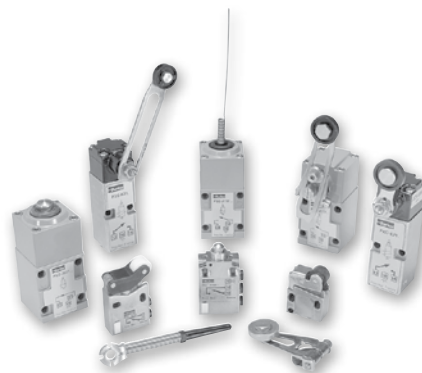

Material specifications

Body	Zinc alloy
Poppets	Polyurethane
Seals	Nitrile (Buna N)

Operating information

Operating pressure:	40 to 115 PSIG (3 to 8 bar)
Operating temperature:	
Operating	32°F to 122°F (0°C to 50°C)
Storage	-22°F to 140°F (-30°C to 60°C)

3/2 Miniature Direct Acting Limit Switches

1/16" I.D. Internal Orifice

	Actuator	Type of switching*	Flow SCFM (NI/min)	Nominal bore	Connection	Part number
	Steel plunger operating levers available	NNP	2.2 (60)	1/16" (1.5mm)	5/32" instant	PXCM111
	Plastic roller	NNP	3.0 (85)		10-32 UNF	PXCM115
					5/32" instant	PXCM121
					10-32 UNF	PXCM125

7/64" I.D. Internal Orifice

	Plastic roller	NNP			5/32" instant	PXCM521
---	----------------	-----	--	--	---------------	----------------

Actuators For Steel Plunger (Use with PXCM11*)

	Plastic roller lever					PXCZ11
	Plastic roller lever, one way trip					PXCZ12

3/2 Compact Pilot Operated Limit Switches

7/64" I.D. Internal Orifice, 5/32" Instant Connections, Pipeable Exhaust Port


	Actuator	Type of switching*	Flow SCFM (NI/min)	Nominal bore	Connection	Part number
	Steel plunger operating levers available					PXCM601A110
	Steel roller plunger	NNP	8.8 (250)	7/64" (2.5mm)	5/32" instant	PXCM601A102
	90° Steel roller plunger					PXCM601A103

* NNP: Normally non-passing. 


 Most popular. For technical information see CD

Miniature Limit Switches


PXCM111

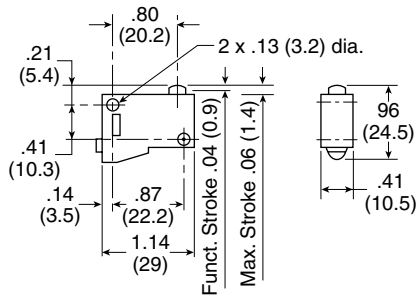


PXCZ12

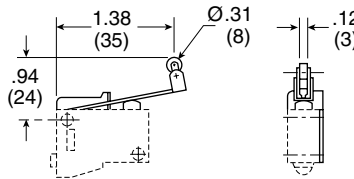


PXCZ11

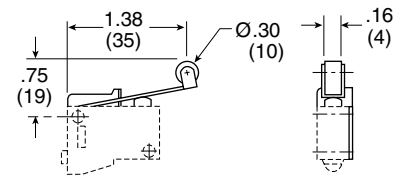

PXCM121, PXCM131

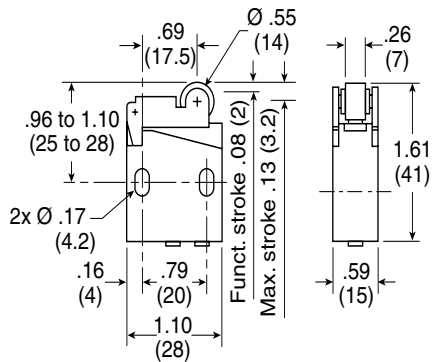


PXCM521

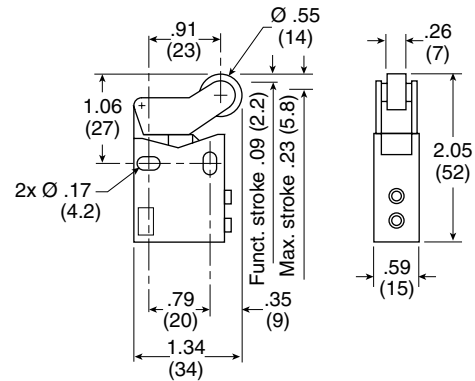


Compact Limit Switches


PXCM601A102

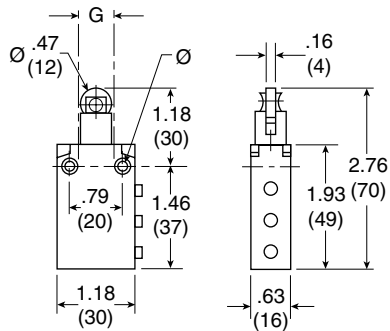

PXCM601A103

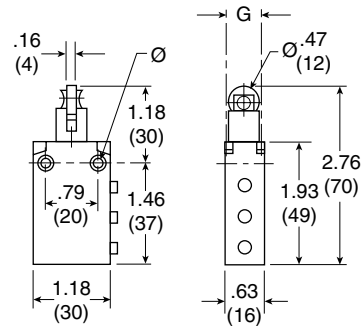

PXCM601A110

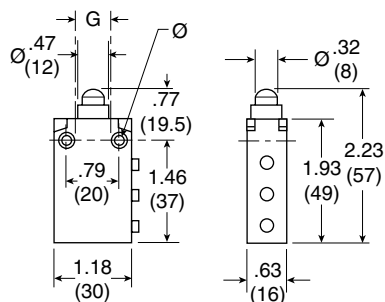

Ø:
 2 mounting holes Ø .17" (4.3)
 2 countersunk Ø .32" (8.2)
 depth 4 mm

G:
 top mounting holes, 2 x M5
 .71" (18 mm) centers