



Technical data

USFD206-20


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, single lip seal

KIT CONTENT

US206-20G2, FD206

VISUAL (S)

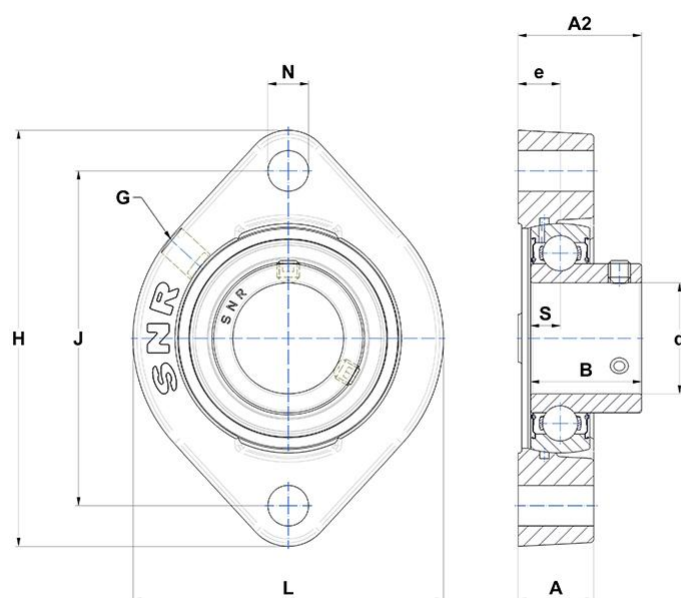

PRODUCT DEFINITION

A - Housing height	20,5 mm
A2 - Total height from mounting surface	33,4 mm
B - Width of Inner Ring	30 mm
d - Shaft diameter	31,75 mm
e - Distance mounting surface to bearing center	11,4 mm
G - Grease fitting	R1/8"

PRODUCT DEFINITION

H - Housing length, width or diameter	112,5 mm
J - Mounting holes distance	90,5 mm
L - Housing width / diameter	84 mm
N - Mounting hole dimension	11 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	8 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	19,5 kN
C0 - Static load rating	11,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	0,64 kg
Recommended tightening torque for set screw	3.7 N-m