




Technical data

32908XU

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

Visual(s)

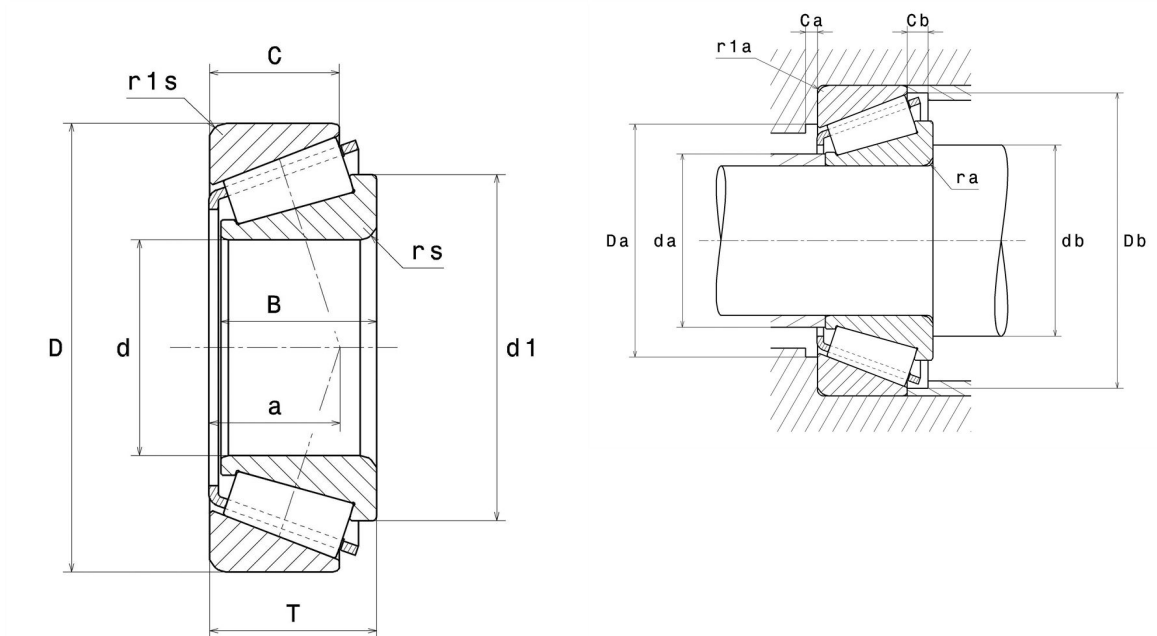

Product definition

d	40 mm
D	62 mm
B	15 mm
C	12 mm
T	15 mm
a	11.5 mm
rs min	0.6 mm
r1s min	0.6 mm
e	0.29
Y2	2.07
Y0	1.14
Mass	0.16 kg
ISO 355 reference	T2BC040
Brand	NTN

Product performance

Dynamic load, C	32.5 kN
Rating life coefficient, A2	1
Static load, C0	48 kN
Fatigue limit load, Cu	5.9 kN
Nlim (oil)	7,800 Tr/min
Nlim (grease)	5,900 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da max	44.5 mm
db min	45.5 mm
Da max	57.5 mm
Db min	58.5 mm
ra max	0.6 mm
r1a max	0.6 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.5	Y0

If $P_0 \leq F_r$, then use $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table