



Technical data

UCP212L3


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, triple lip seal

KIT CONTENT

UC212G2L3, P212

VISUAL (S)

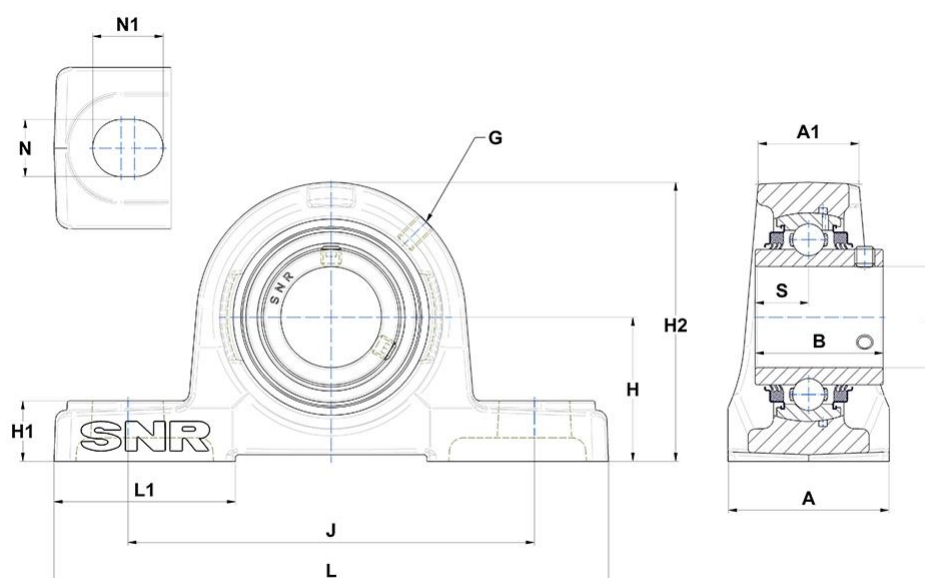

PRODUCT DEFINITION

A - Housing width	70 mm
A1 - Housing top width	44 mm
B - Width of Inner Ring	65,1 mm
d - Shaft diameter	60 mm
G - Grease fitting	M6x1
H - Distance mounting base to centerline spheric. seating diam.	69,8 mm

PRODUCT DEFINITION

H1 - Housing foot height	25 mm
H2 - Housing height	138 mm
J - Mounting holes distance	184 mm
L - Housing length	241 mm
L1 - Housing foot length	70 mm
N - Mounting hole dimension	20 mm
N1 - Mounting hole length	25 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	25,4 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	52,5 kN
C0 - Static load rating	32,8 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	5,03 kg
Recommended tightening torque for set screw	22 N-m