

Technical data

EXPAE206


Bearing units

Grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

KIT CONTENT

EX206G2, PAE206

VISUAL (S)

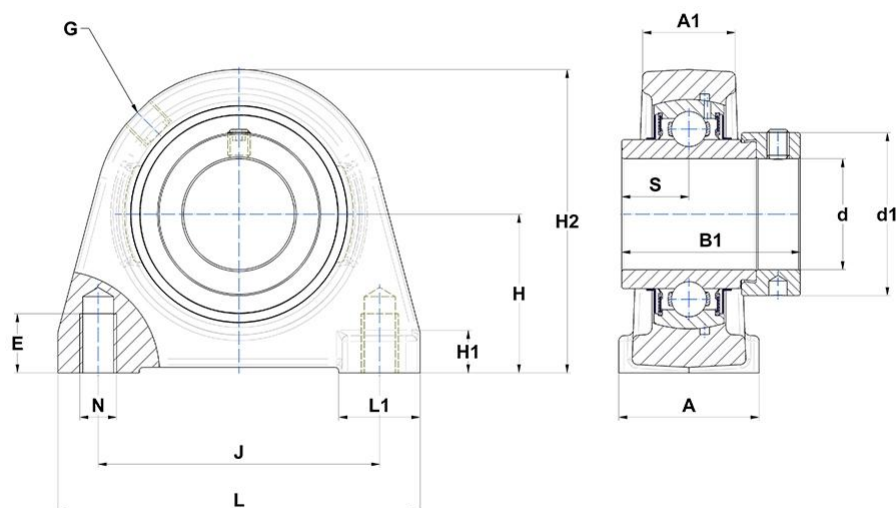

PRODUCT DEFINITION

A - Housing width	38 mm
A1 - Housing top width	25 mm
B - Width of Inner Ring	36,4 mm
d - Shaft diameter	30 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	44,1 mm
E - Mounting hole thread depth	12,5 mm

PRODUCT DEFINITION

G - Grease fitting	R1/8"
H - Distance mounting base to centerline spheric. seating diam.	42,9 mm
H1 - Housing foot height	11 mm
H2 - Housing height	82 mm
J - Mounting holes distance	76,2 mm
L - Housing length	98 mm
L1 - Housing foot length	22 mm
N - Mounting hole dimension	M10
S - Dist. cent. of raceway to face IR on side opp. lock. device	18,2 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	19,5 kN
C0 - Static load rating	11,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,01 kg
Recommended tightening torque for set screw	11.5 N-m