




Technical datasheet

N2215G1C4

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, brass cage

Visual(s)

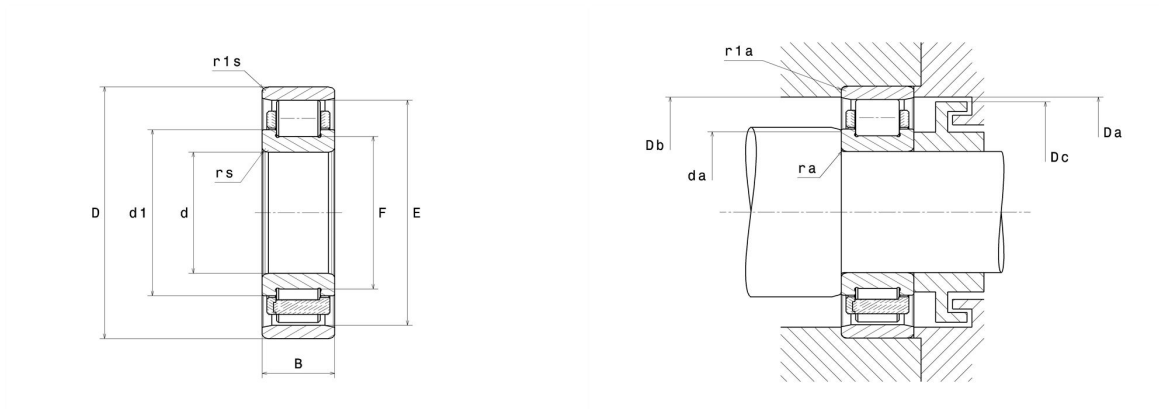

Product definition

d	75 mm
D	130 mm
B	31 mm
E	116.5 mm
F	88.5 mm
d1	94 mm
rs min	1.5 mm
r1s min	1.5 mm
Radial clearance class	C4
Mass (without HJ ring)	1.63 kg
Brand	NTN

Product performance

Dynamic load, C	130 kN
Static load, C0	162 kN
Fatigue limit load, Cu	19.6 kN
Nlim (oil)	5,500 rpm
Nlim (grease)	4,700 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.18 Hz
Characteristic outer ring frequency, BPF0	6.91 Hz
Characteristic inner ring frequency, BPFI	9.09 Hz

Abutment dimensions

da min	83 mm
Da max	122 mm
Db min	118 mm
Dc max	115 mm
ra max	1.5 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$